



BENEITO FAURE

passion for led light


passion
for
led light

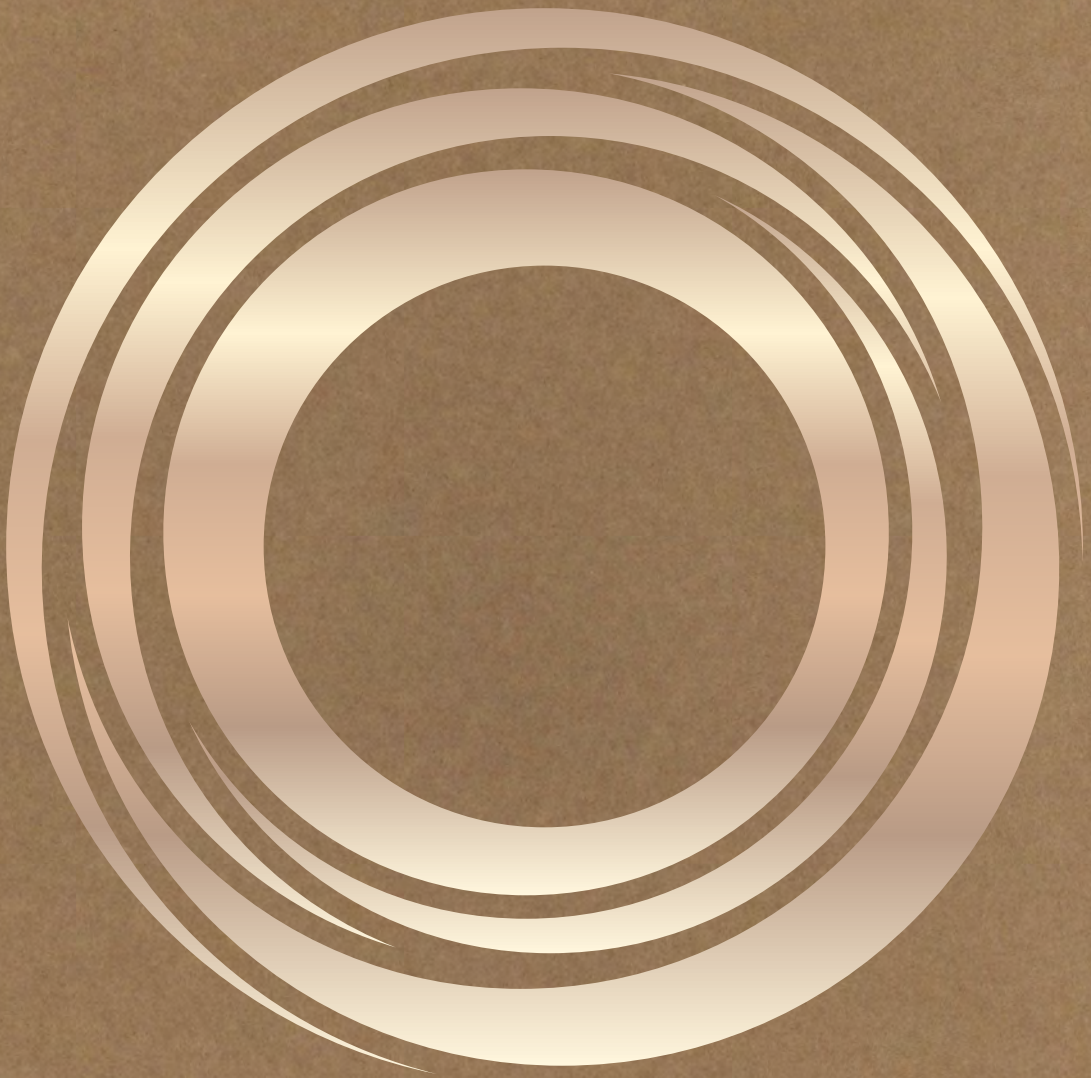


FAURE

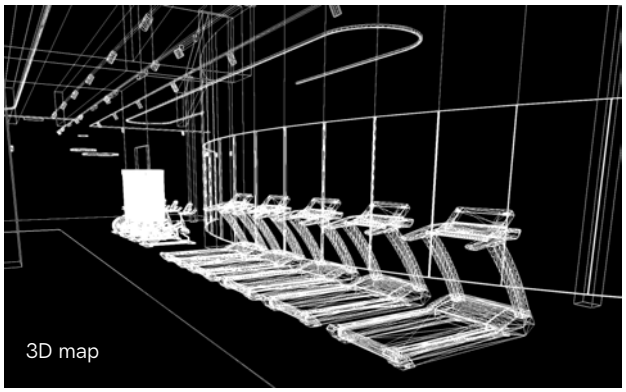


3D map

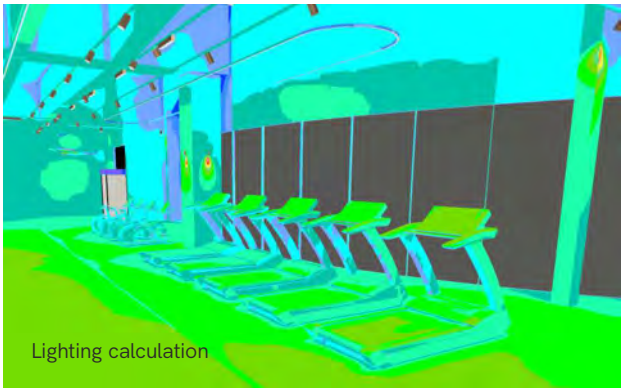

Lighting calculation



Render

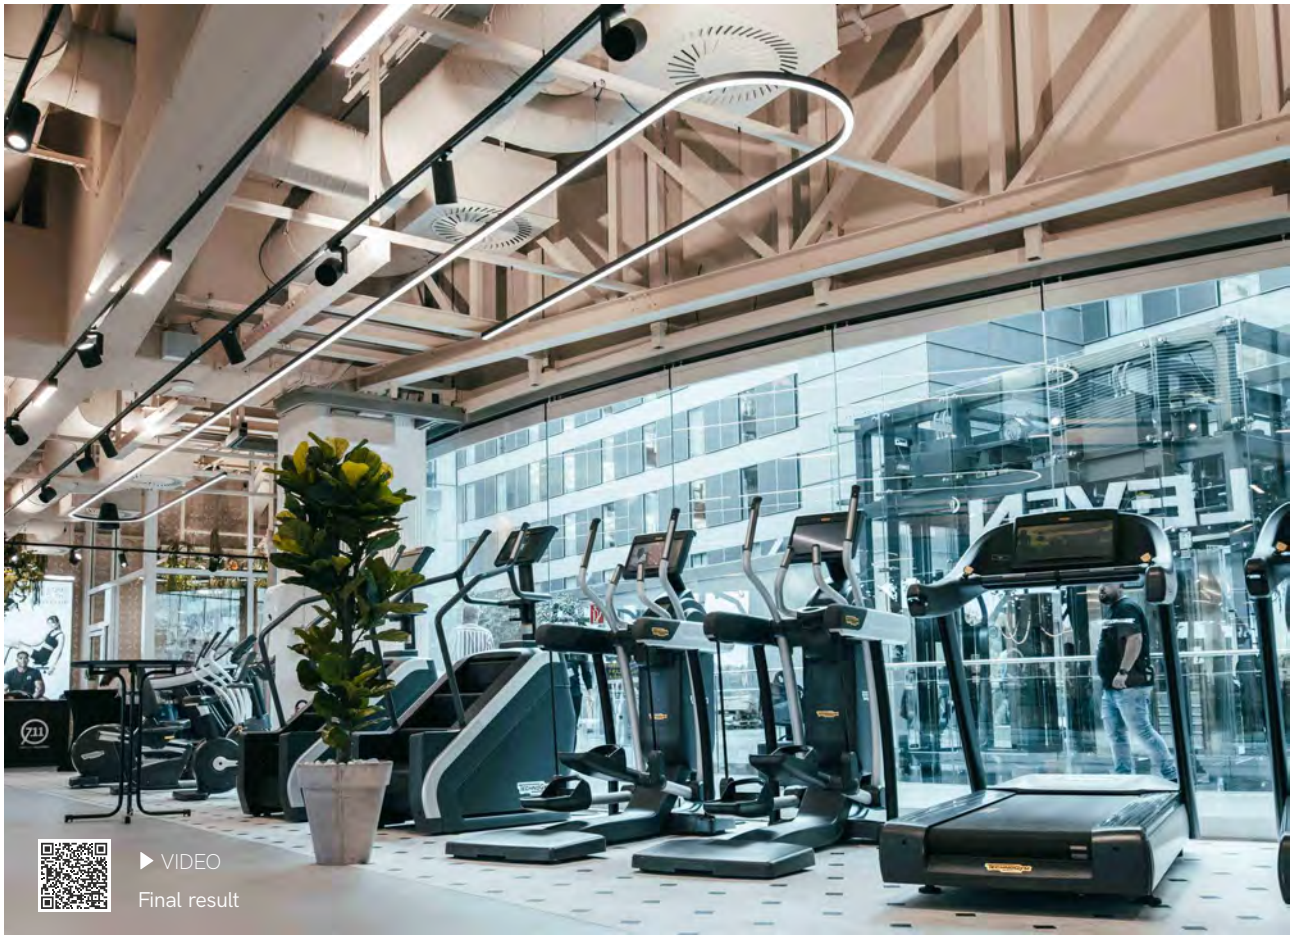

▶ VIDEO
Final result

FITSEVENELEVEN®, Club Frankfurt Airport.

# Projects

Our project department offers a wide range of services focused on providing lighting solutions that are not only aesthetically appealing, but also improve people's quality of life and comply with current regulations.
Below we describe the key services that our project department can offer:

- Custom lighting design: Our team of highly skilled lighting designers works closely with costumers to create lighting solutions tailored to their specific needs. We strive to understand the unique characteristics of each project and design lighting systems that enhance the aesthetics, functionality, and comfort of the space.
- Human-centered lighting: We recognize the importance of lighting on people's health and well-being. Our designs take into account factors such as circadian cycle, visual fatigue and ergonomics to ensure that lighting contributes positively to the environment and people's performance.
- Energy efficiency: We are introducing practices and products that increasingly fit within the parameters of sustainability. We believe in creating and distributing LED products that fit within a circular economy in order to minimize waste and have a more sustainable and durable planet, always adding value to each lighting project. We are committed to designing lighting systems that are highly energy efficient. This not only reduces operating costs, but also contributes to environmental sustainability. Our designs incorporate cutting-edge LED lighting technologies and intelligent control systems.
- Regulations: Our team is highly trained in current regulations and standards in the field of lighting. We ensure that all our designs comply with local and national standards, guaranteeing the safety and legal compliance of each project.
- Technical advice in the choice of products and during product installation.

Our project department offers solutions that improve people's quality of life, comply with regulations and stand out for their innovative design. If you are looking for a reliable partner for your next lighting project, do not hesitate to contact us. We are ready to bring your lighting ideas and needs to life.
If you are looking for a reliable partner for your next lighting project, feel free to contact us. We are ready to bring your ideas and lighting needs to life.
On the left is one of our latest interior lighting projects for the FITSEVENELEVEN® Club at Frankfurt Airport.

Nuestro departamento de proyectos ofrece una amplia gama de servicios enfocados en proporcionar soluciones de iluminación que no solo sean estéticamente atractivas, sino que también mejoren la calidad de vida de las personas y cumplan con las regulaciones vigentes.
A continuación, describiremos los servicios clave que nuestro departamento de proyectos puede ofrecer:

- Diseño de iluminación personalizado: Nuestro equipo de diseñadores de iluminación altamente capacitado trabaja en estrecha colaboración con los clientes para crear soluciones de iluminación adaptadas a sus necesidades específicas. Nos esforzamos por comprender las características únicas de cada proyecto y diseñar sistemas de iluminación que realcen la estética, la funcionalidad y la comodidad del espacio.
- Iluminación centrada en el ser humano: Reconocemos la importancia de la iluminación en la salud y el bienestar de las personas. Nuestros diseños tienen en cuenta factores como el ciclo circadiano, la fatiga visual y la ergonomía para garantizar que la iluminación contribuya positivamente al entorno y al rendimiento de las personas.
- Eficiencia energética: Estamos introduciendo prácticas y productos que se ajustan, cada vez más, dentro de los parámetros de la sostenibilidad. Creemos en la creación y distribución de productos LED que encajen dentro de una economía circular para poder minimizar los residuos y tener un planeta más sostenible y duradero, siempre añadiendo valor a cada proyecto de iluminación. Nos comprometemos a diseñar sistemas de iluminación que sean altamente eficientes desde el punto de vista energético. Esto no solo reduce los costos operativos, sino que también contribuye a la sostenibilidad ambiental. Nuestros diseños incorporan tecnologías de iluminación LED de vanguardia y sistemas de control inteligente.
- Normativa: Nuestro equipo está altamente capacitado en las regulaciones y normativas vigentes en el campo de la iluminación. Nos aseguramos de que todos nuestros diseños cumplan con los estándares locales y nacionales, garantizando así la seguridad y el cumplimiento legal de cada proyecto.
- Asesoramiento técnico en la elección de los productos y durante la instalación de los mismos.

Nuestro departamento de proyectos ofrece soluciones que mejoran la calidad de vida de las personas, cumplen con las normativas y destacan por su diseño innovador. Si está buscando un socio de confianza para su próximo proyecto de iluminación, no dude en ponerse en contacto con nosotros. Estamos listos para dar vida a sus ideas y necesidades de iluminación.
A la izquierda se muestra uno de nuestros últimos proyectos de iluminación interior el Club FITSEVENELEVEN® en el Aeropuerto de Frankfurt.

# Symbology



Installation.
Instalación.



Casambi protocol.
Protocolo Casambi.




Tuya protocol.
Protocolo Tuya.



Need Tuya Smart App to work.
Necesita aplicación Tuya Smart para funcionar.




Dali protocol.
Protocolo Dali.




Dali 2 protocol.
Protocolo Dali 2.




Push.
Pulsador.




Radio frequency.
Radio frecuencia.




TRIAC Dimmable.
Regulable por TRIAC.




3 light intensities.
3 intensidades luminosas.



Made to measure strip LED cutting.
Corte de tiras LED a medida.



Customized cutting and handling.
Corte y manipulación personalizado.



Saline-alkali resistance.
Resistencia a los álcalis salinos.




Anti-UV.
Anti-UV.



Corrosion resisting.
Resistencia a la corrosión.



Type of aluminium.
Tipo de aluminio.



Customizable color.
Color personalizable.




Maximum Power.
Potencia Máxima.



Acoustic absorption.
Absorción acústica.



Fire resistance.
Resistente al fuego.



Recycled materials.
Materiales reciclados.



100% Polyethylene Terephthalate.
100% Tereftalato de polietileno.




Supported weight.
Peso soportado.



Glare rating.
Indice de deslumbramiento.




Color temperature selector.
Selector de temperatura de color.




Power selector.
Selector de potencia.




Color rendering index.
Índice de reproducción cromática.



Water and dust protection.
Resistencia al agua y al polvo.




Beam Angle.
Ángulo de apertura.




Light 360°.
Luz 360°.



Power Factor.
Factor de Potencia.



Voltage.
Tensión de entrada.



Surface luminaire not suitable for mounting on flammable surfaces.
Luminaria de superficie no adecuada para montaje en superficies inflamables.



Recessed luminaire not suitable for mounting on flammable surfaces.
Luminaria empotrada no adecuada para montaje en superficies inflamables.



Do not cover.
No cubrir.

5
YEARS
WARRANTY

Warranty.
Años de garantía.

30.000
HOURS

Lifetime.
Horas de vida.

50/60
Hz

Hertz.
Hercios.



Class II.
Clase II.

CABLE
24CM

Cable length.
Longitud del cable.




Surge protection.
Protección contra sobretensiones.




Impact resistance.
Resistencia a los impactos.



Touch control.
Control táctil.




Battery autonomy.
Autonomía de la batería.




Charging time with electricity.
Tiempo de carga con corriente.




Motion sensor.
Detector de movimiento.




Distance sensor.
Distancia de detección.





Suitable for closed luminaires.
Apta para luminarias cerradas.




Units per box (min-max).
Unidades por caja.



Electronic waste.
Residuos electrónicos.



Replace cracked protection shield.
Sustituir pantalla de protección con fisuras.



Class I.
Clase I.




Class III.
Clase III.




Supported weight.
Peso soportado.




Operating Temperature.
Temperatura de trabajo.



Ground slope.
Inclinación del suelo.

AKZO
NOBEL

Anti corrosive marine paint.
Pintura anticorrosión marina.




Wireless charging.
Carga inalámbrica.




Battery capacity.
Capacidad de la batería.




Charging time with sun.
Tiempo de carga con sol.




Crepuscular sensor.
Sensor crepuscular.



Gravity sensor.
Sensor gravitatorio.




Adjustable operating time.
Tiempo de encendido regulable.



EMC anti-interference certification.
Certificación anti interferencias EMC.

RoHS


Restriction of Hazardous Substances.
Restricción de sustancias peligrosas.




European conformity.
Conformidad Europea.


Smart home solution

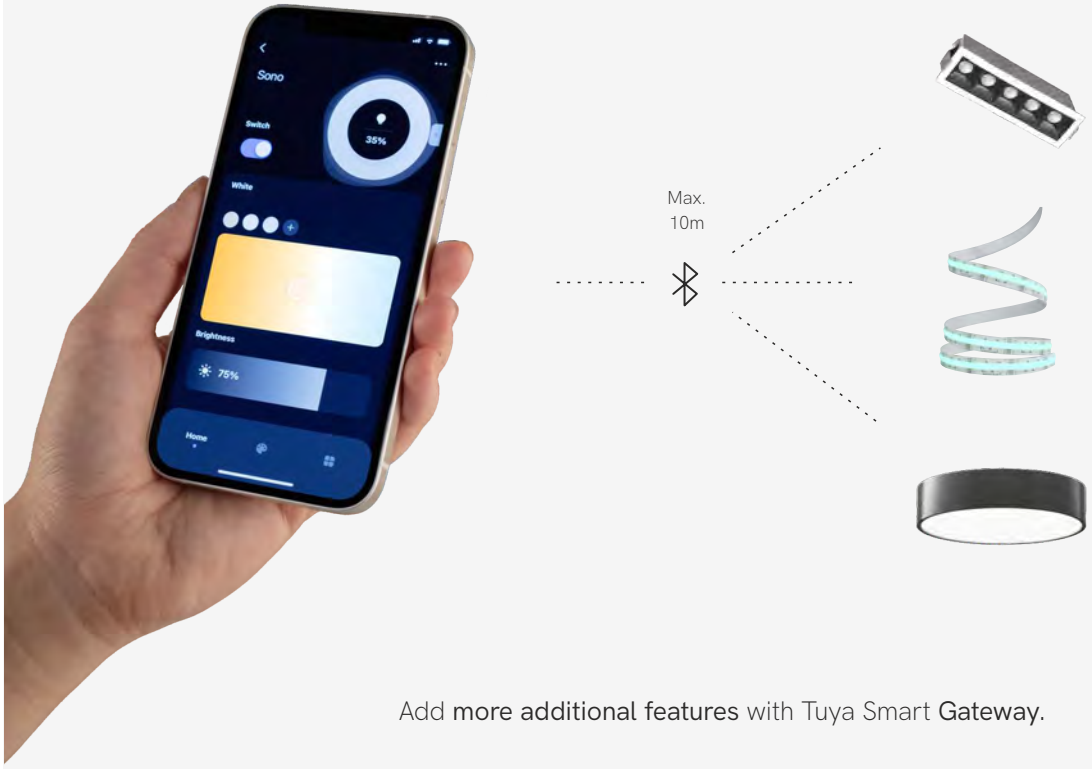


Add **more additional features** with Tuya Smart **Gateway**.




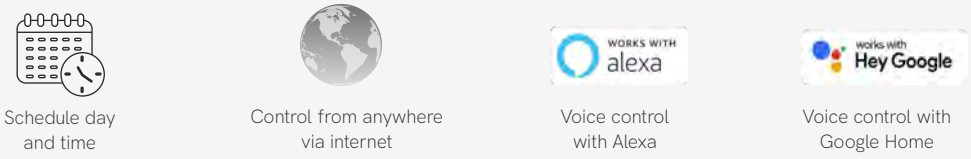


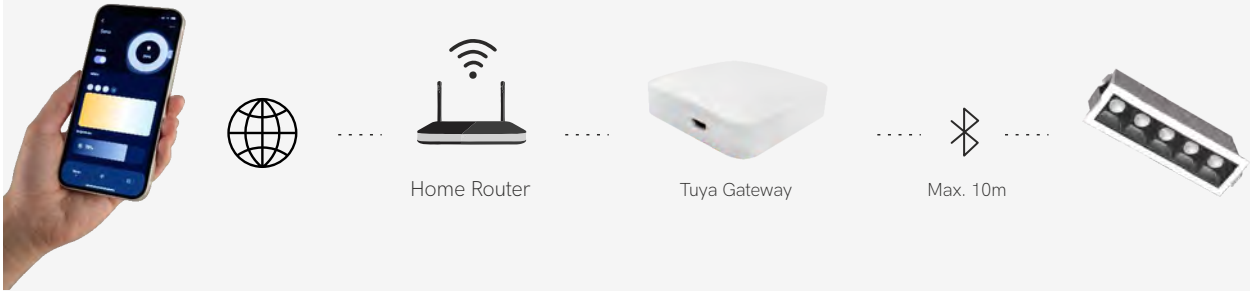

All products with Tuya logo can have these functions.


# CASAMBI

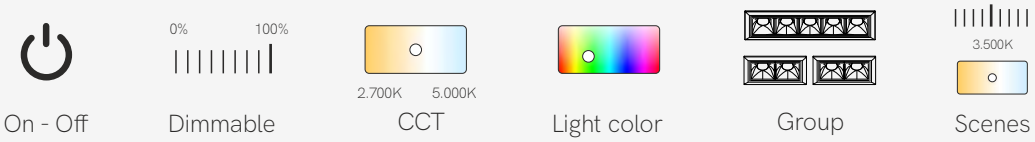Professional solution

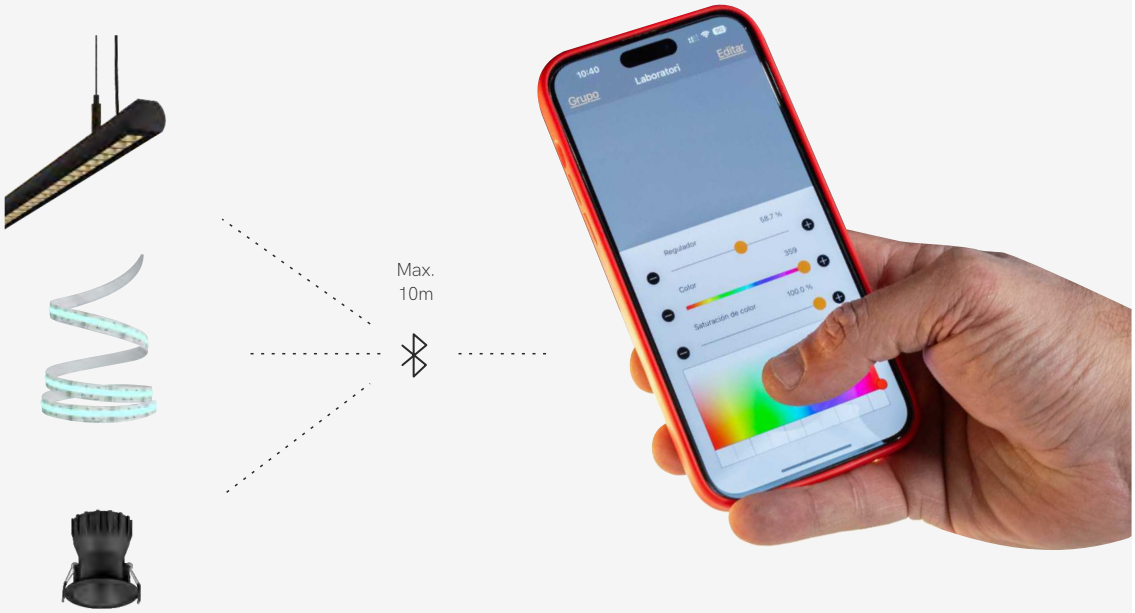


Add **more additional features** with Casambi Smart **Gateway**.







All products with Casambi logo can have these functions.


# Sampling & Display Stand

Discover our selection of exhibitors designed by Beneito Faure to present and explain our products to our customers in a simple and interactive way, being able to appreciate the materials, the different applications and their lighting effects.

Each exhibitor is designed to communicate in the most effective way the characteristics and benefits of our products.

Contact our sales department to order your exhibitor.

Led strip book

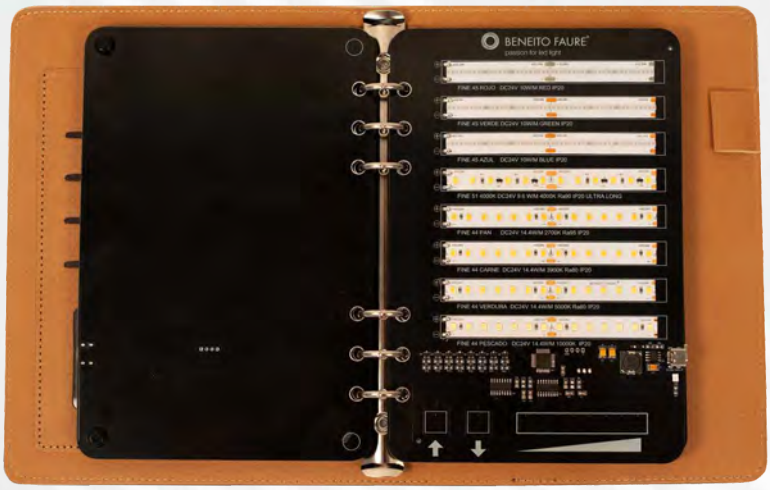


(37x3,5x23,5cm)

BENEITO FAURE®
passion for led light

Descubre nuestra selección de expositores diseñados por Beneito Faure para ayudar a nuestros clientes a dar a conocer y explicar nuestros productos de una forma sencilla e interactiva, pudiendo apreciar los materiales, las diferentes aplicaciones y los efectos lumínicos de los mismos.

Cada expositor está pensado para comunicar de la manera más eficaz las características y beneficios de nuestros productos.

Ponte en contacto con nuestro departamento comercial para pedir tu expositor.

Led strip briefcase




(42x15x35cm)

# Sampling & Display Stand


Led strips and profiles
1st display




(64x40x174cm) / (64x40x213cm) with 2m profiles

BENEITO FAURE®
passion for led light

Led strips and profiles
2nd display

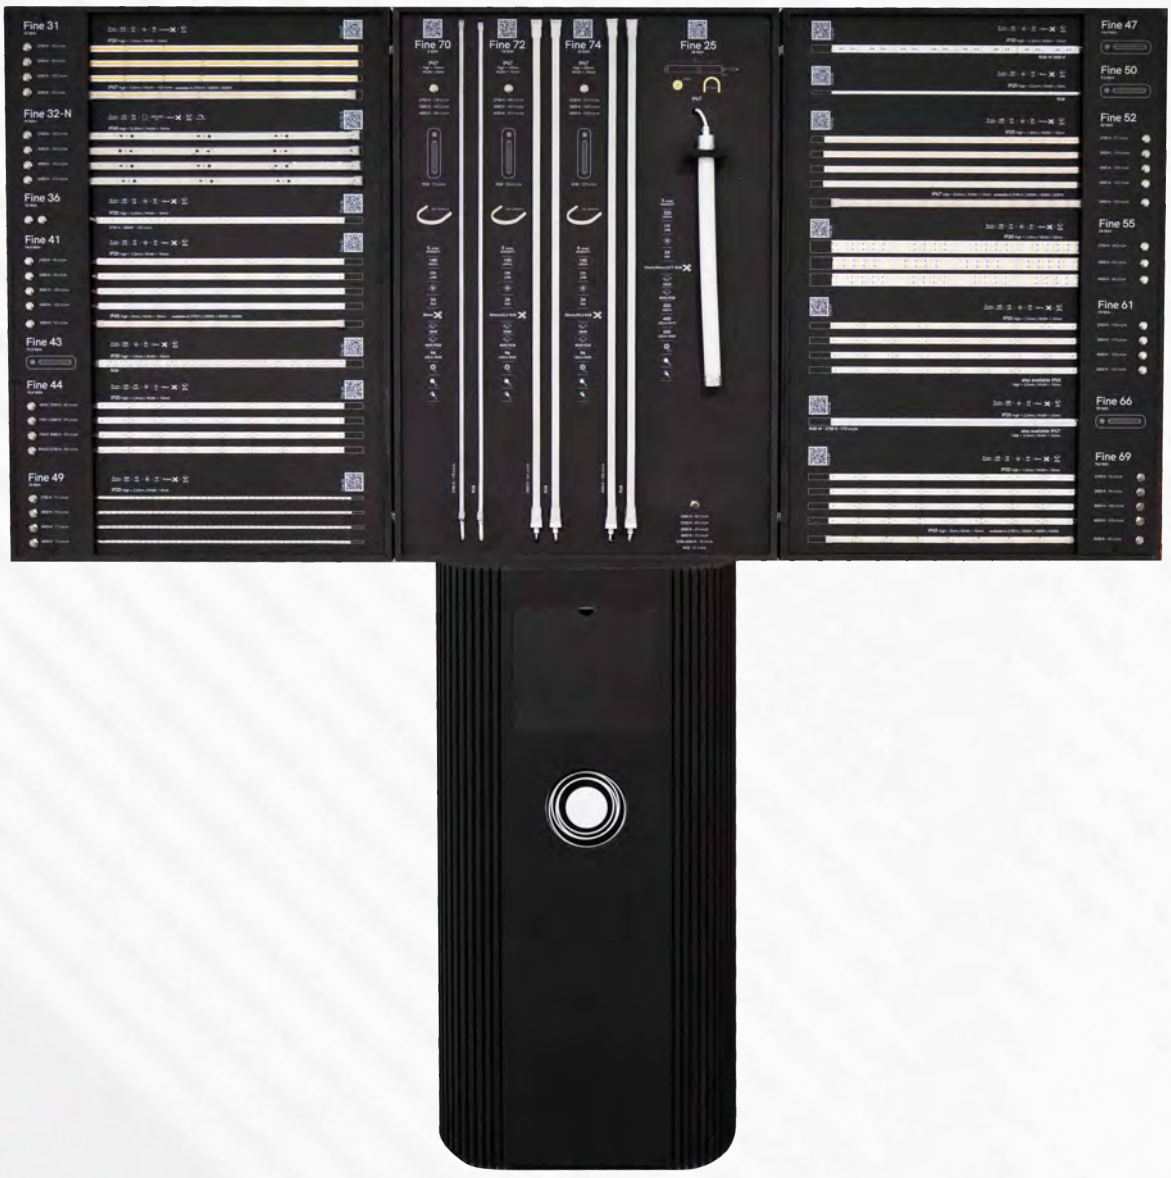


(197x45x197cm)

# Sampling & Display Stand




Touch panel

Technical and decorative display
side A




(110x38x200cm)


BENEITO FAURE®
passion for led light

Technical and decorative display
side B



# HUMAN CENTRIC LIGHTING


## One CCT foreach activity
Un CCT en cada actividad de tu dia

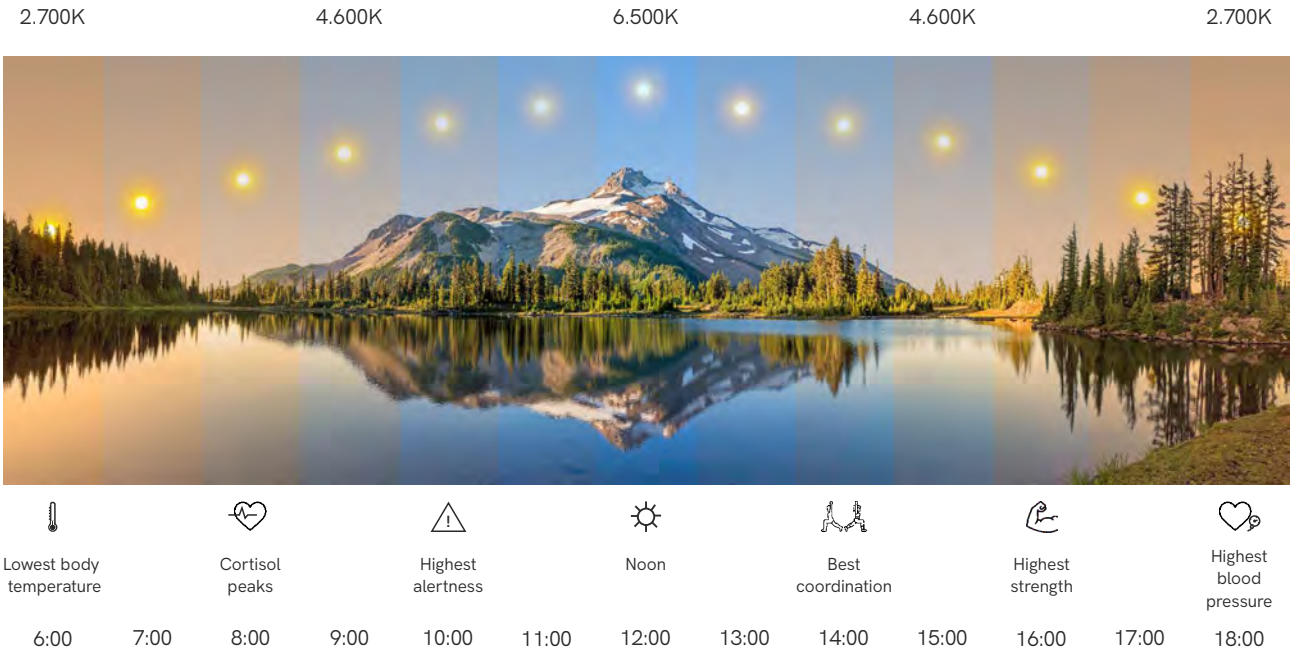


**CCT** is the color appearance that a light source emits compared to a CIE standard. It is measured in degrees Kelvin (K). The warmest lights have the lowest values and the coldest ones the highest. Our CCTs range from 2200K to 6000K.
You can create and modify lighting scenes, change light intensity, and choose from a great variety of CCTs. With CASAMBI control, for example, you can create lighting based on the circadian circle.

El **CCT** es el aspecto cromático que emite una fuente de luz en comparación con un estándar CIE. Se mide en grados Kelvin (K). Las luces más cálidas tienen los valores más bajos y las más frías los más altos. Nuestros CCT van de 2.200K a 6.000K.
Puede crear y modificar escenas de iluminación, cambiar la intensidad de la luz y elegir entre una gran variedad de CCT. Con el control CASAMBI, por ejemplo, puede crear una iluminación basada en el círculo circadiano.

## Light quality
Calidad de la luz

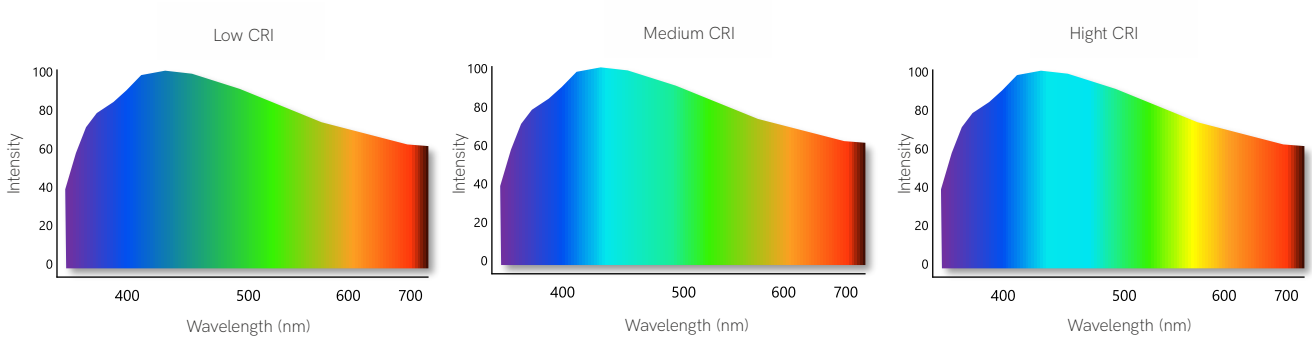



**CRI** or the Color Rendering Index is a measurement that evaluates how faithfully a light source displays colors compared to natural light. It is classified from 0 to 100; 100 value is highest accurate representation of colors, while lower values may distort the appearance of colors. Our products CRI range from 80 to 98.

El **CRI** o Índice de Reproducción Cromática es una medida que evalúa la fidelidad con la que una fuente de luz muestra los colores en comparación con la luz natural. Se clasifica de 0 a 100; el valor 100 es la representación más precisa de los colores, mientras que los valores inferiores pueden distorsionar la apariencia de los colores. El CRI de nuestros productos oscila entre 80 y 98.




**Photobiological risk** are all photobiological hazards that can affect the skin and eyes. From ultraviolet to infrared wavelengths. A RG0 is the lowest risk and RG4 is the highest risk. All our products are the lowest risk, RG0 or Rg1.

Son todos los **riesgos fotobiológicos** que pueden afectar a la piel y los ojos. Desde las longitudes de onda ultravioleta hasta las infrarrojas. Un RG0 es el riesgo más bajo y un RG4 es el riesgo más alto. Todos nuestros productos tienen el riesgo más bajo, RG0 o RG1.

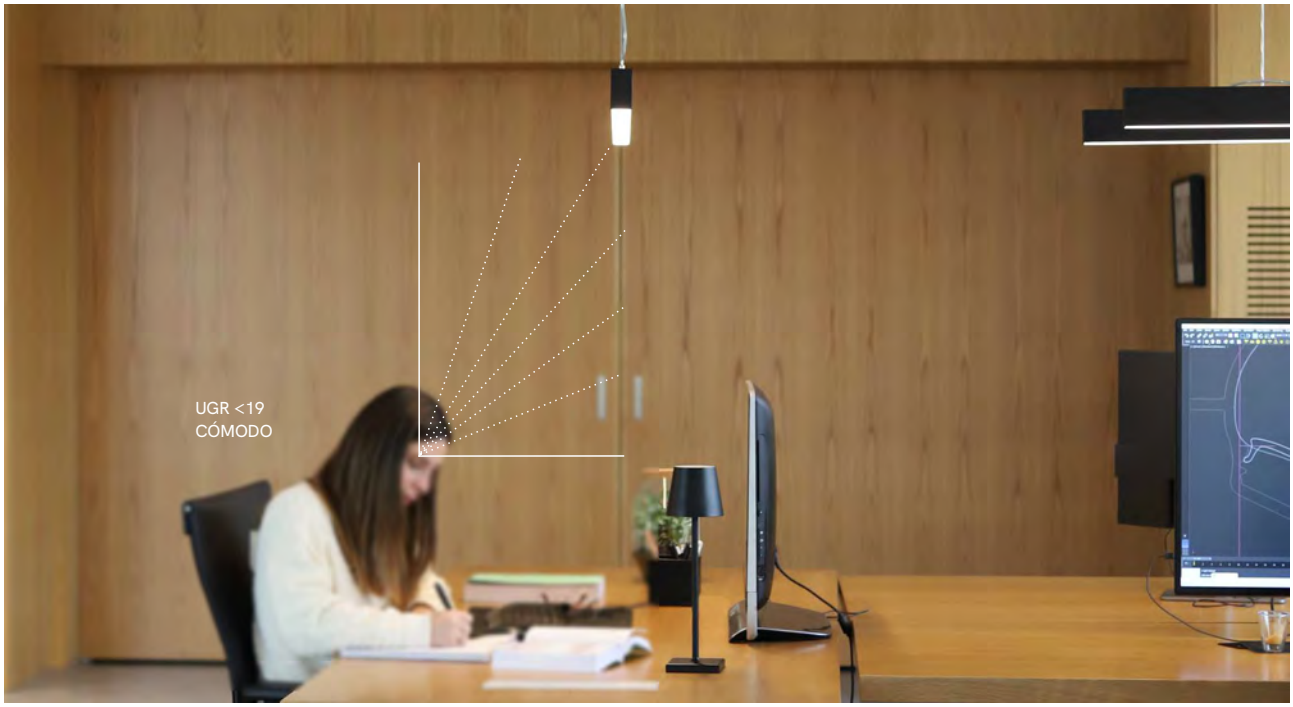


**UGR** or united glare rating is a measurement that helps us understand how much annoying glare can affect our vision. When the brightness is very strong it makes you squint or makes it difficult for you to see well. The higher the index, the more annoying the brightness can be for our eyes. You can check which products have a UGR less o equal than 19 as requested by the regulations for workspaces.

El **UGR** o índice de deslumbramiento unido es una medida que nos ayuda a comprender hasta qué punto el molesto deslumbramiento puede afectar a nuestra visión. Cuando la luminosidad es muy intensa, nos hace entrecerrar los ojos o nos dificulta ver bien. Cuanto mayor sea el índice, más molesto puede ser el brillo para nuestros ojos. Puede comprobar qué productos tienen un UGR inferior o igual a 19, tal y como exige la normativa para espacios de trabajo.

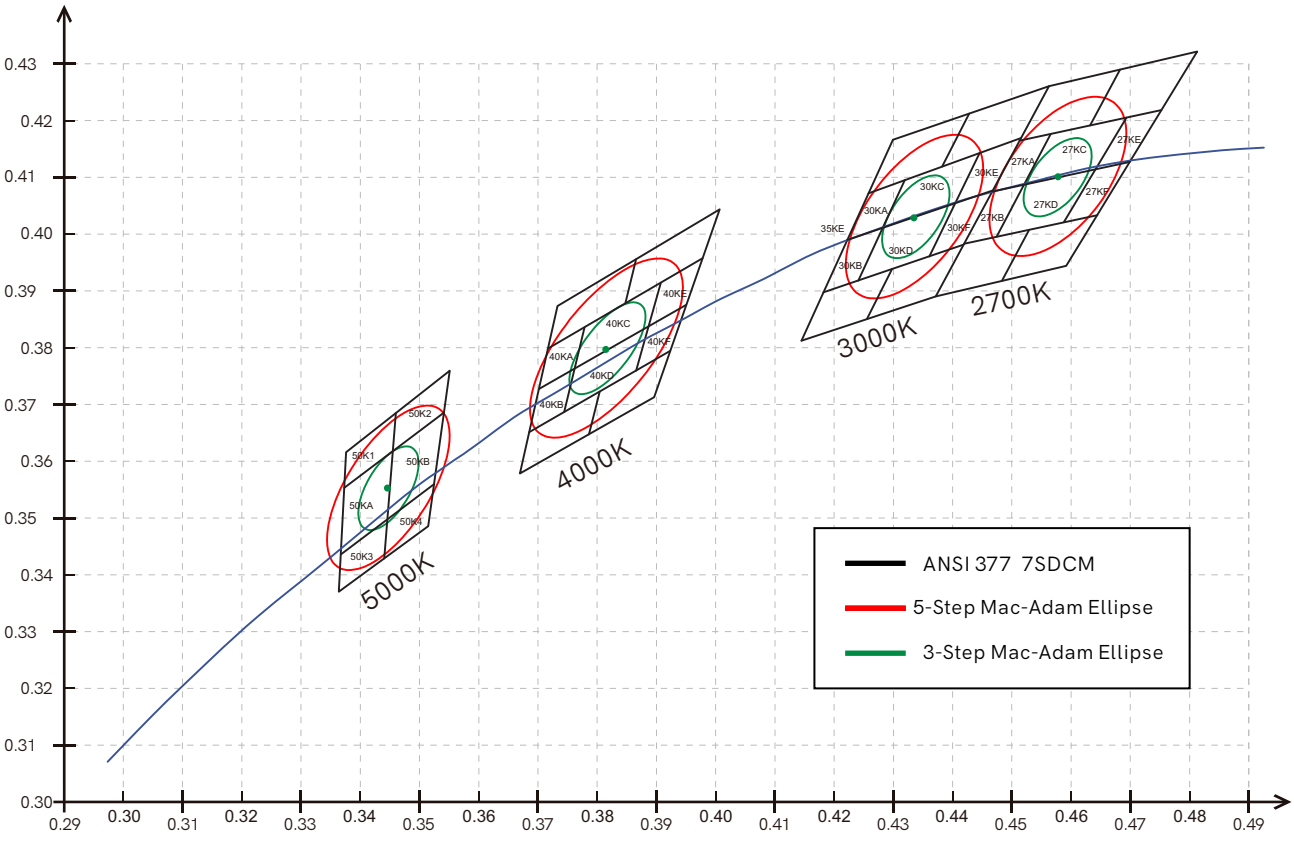


Steps MacAdam are a measurement that describes the color variation perceptible to the human eye. They are a series of ellipses that represent the changes in the different CCTs. The fewer MacAdam steps, the greater the perceived uniformity and consistency of color. All our products have 3 or 5 steps MacAdam.

ONE binning are groups of LEDs that are formed based on the same characteristics in light intensity and CCT. This ensures continuity in CCT and brightness in different manufacturing batches.

Los pasos Steps MacAdam son una medida que describe la variación de color perceptible por el ojo humano. Son una serie de elipses que representan los cambios en los diferentes CCT. Cuantos menos pasos MacAdam, mayor uniformidad y consistencia de color se percibe. Todos nuestros productos tienen 3 o 5 pasos MacAdam.

ONE binning son grupos de LEDs que se forman en base a las mismas características en intensidad luminosa y CCT. Esto asegura la continuidad en CCT y brillo en diferentes lotes de fabricación.

## The effects of light
## Efectos de la luz

The different CCT of light and colors affect human beings in a direct way in emotions, mood and sense of well-being. Warmer light tends to create a more welcoming and relaxing atmosphere. Cooler light tends to be more stimulating and can help maintain alertness and focus. Color-changing lighting can also attract attention to a certain area. In the same way, using an inappropriate CCT or changing color too quickly can negatively affect the users of the space, causing discomfort and stress
.

Las distintas TMC de luz y colores afectan al ser humano de forma directa en las emociones, el estado de ánimo y la sensación de bienestar. La luz más cálida tiende a crear un ambiente más acogedor y relajante y luz más fría tiende a ser más estimulante y puede ayudar a mantener el estado de alerta y la concentración.
La iluminación que cambia de color también puede atraer la atención hacia una zona determinada.
Del mismo modo, utilizar un TAC inadecuado o cambiar de color demasiado rápido puede afectar negativamente a los usuarios del espacio, provocando incomodidad y estrés.

# Luminaires

32

## Surface / Pendant



NEW

Evo

43



NEW

Evo mini

49



NEW

Evo R

50



NEW

Urban fly

60



NEW

Kubo

85



NEW

Mirrow

89



NEW

Tax

91



NEW

Nyneto

101



NEW

Minimus

103



Dau

105



Grip

99



Nexus

76



Square

109



Time

73



Triton

143



Triton down

147



Urban asymmetric

64



Urban market

70



Urban train

58



Urban work

61

## Pendant



NEW

Evo fly

45



NEW

Evo dual

47



NEW

Horizon

139



Dual

77



WOOD

Forest

79



Filter

93



Tubi

95

# Luminaires

## Recessed



NEW

Evo E
53




Urban E
56



Time E
74



Kubo E
86



Dau E
106

## Wall



NEW

Evo dual
47



NEW

Tubi wall
97



Urban wall sensor
62



Time wall sensor
81



Flash
141

## Blaber



NEW

Blaber line
151



NEW

Blaber square
153



NEW

Blaber round
155



NEW

Blaber triangular
157

## Kaa



NEW

Kaa
135



NEW

Kaa line
137

## Track



NEW

Evo track
51



Urban track
68



Time track
83

# Luminaires

## Zero



NEW

Zero XL
119



NEW

Circus
113




NEW

Tundra
115



NEW

Zero in
111




NEW

Zero out
117



Zero direct
123



Zero design
126-127



Zero dual
133

## Luminaires accessories

158-159







# Led strips

210



NEW

Fine 48
217



NEW

Fine 54
247



NEW

Fine 63
243



NEW

Fine 64
216



NEW

Fine 71
255



NEW

Fine 76
231



NEW

Fine 96
230



Fine 31
225



Fine 32 N
237



Fine 36
244



Fine 41
223



Fine 42
245



Fine 43
251



Fine 44
239



Fine 45
257



Fine 46
249



Fine 47
254



Fine 49
235

# Led strips



Fine 50
252



Fine 51
236



Fine 52
229




Fine 55
233



Fine 56
232



Fine 61
227



Fine 66
253



Fine 69
221



Fine 84
219

## SPI



NEW
Fine running
259



NEW
Fine SPI-2
260



NEW
Fine SPI-3
261



NEW
Fine SPI-4
263

## DMX



NEW
Fine DMX-4
264



NEW
Fine DMX-5
265

## Neon



Fine 25
268



Fine 70
272



Fine 72
276



Fine 74
278

## Control



NEW
Casambi
285-286



NEW
SPI
287



NEW
DMX
287



RF
282



Tuya
283



PMW/RF
286



Triac
288



Dali
288



Motion
Sensor
289



Power
supplies
290-291

## Led strips accessories

292-293



# Profiles

160

## Surface



NEW
Box 73
193



Box 12
192



Box 16
166



Box 18
169



Box 23
172



Box 28
197

## Surface / Pendant



NEW
Box 75
182



NEW
Box 99
185



Box 19
180



Box 39
196



Box 35
176

## Recessed



NEW
Box 95
183



Box 10
181



Box 11
195



Box 15
167



Box 17
171



Box 53
173



Box 38
177

## Corner



NEW
Box 24
189



NEW
Box 60
187



NEW
Box 71
190



Box 14
186

## Recessed trimless



NEW
Box 68
175



Box 37
179

## Wall



NEW
Box 98
199



Box 22
200



Box 27
203



Box 33
201

## Flex



Box 13
191

## Skirting



NEW
Box 65
205



Box 21
202

## Step



NEW
Box 67
207

## Recessed floor



Box 29
208

## Heat sink



Box 30
209

# Technical lighting

298

## Three phase track



NEW
Lonja
301



NEW
Crown
309



NEW
Cookie
329



Sono
303



Zoom
305



Lena
311



Aston
313



Konic
315



Kom
317



Tram
319



Alfa
321



Picolo switch
323



Picolo GU10
324



Picolo AR111
326



Three phase track
330-333



Three phase base
331-333

## Surface



NEW
Crown
309



NEW
Golf
376-377



Nox
335



Picolo
switch
323



Picolo
GU10
324



Picolo
AR111
326



WOOD
Pulcom
surface
350



Pulsar
surface
356



Nano pulsar
surface
362

## Recessed



NEW
Crown
309



NEW
Micro zoom
375



NEW
Atom
379



NEW
Oxo
365



Bonn
337



Tram
recessed
339-340



Tao
343



Pulcom
345-348



Pulsar
355



NEW
Pulsar
gold trim
356



Nano pulsar
358



NEW
Nano pulsar
gold trim
360



Mini oxo
367-369



Nano oxo
372

# Decorative lighting

380

## Magnet track 48V



NEW
Hat
401



NEW
Sphere
389



NEW
Diro
405



NEW
Cookie
391



NEW
Fine 25 circle
406



NEW
Curve tram
388



NEW
Curve line
388



NEW
Curve track
409



NEW
Casambi control
407



Tram 48V
385



Line
387



Dot
395



Bora
397



Alp
399



Zoe
400



Volt
403



Magnet track
408-409

## Space



Bora
421



Bora XL
422



Zoe
425



Zoe XL
426



Nano alp
429



Alp
430



Lievo
433



Lievo XL
434



Side base
416



Front base
418

## Surface / Recessed



NEW
Hat
455



NEW
Argo
475



NEW
Cookie
437



NEW
Alp surface
444



Bora
439



Bora
440-442



Zoe
445

# Decorative lighting

## Surface / Recessed



Atmos slim
447



Atmos switch
448



Atmos GU10
450



Ark
453



Volt
457-461



Stem
505

## Wall / Ceiling



NEW
Sphere wall
487



NEW
Sphere Alp
487



NEW
Sweet
489



NEW
Beam
491



NEW
Pure
493



NEW
Oma
495



NEW
Tron
485



Tot
463



Rubyc
465



Mini rubyc
466



Concord
469



Mini concord
470



Plus
473



Icon
483



WOOD
Mac wall
477



One wall
479



Zio wall
481

## Recessed



Lao
497



Pun
499



Ilo
501



Skin
501



Port
502



Grow
502



Steps
502

# Decorative lighting

## Portable battery



NEW
Bag
507



NEW
Bimba
509



Lievo
513



Converse
515

## Downlights

516



Kora round
519



Kora square
520



Thessis
523 / 524



Air
527



Noi
529



Compac
531

## Industrial lighting

532



NEW
Ufo lens switch
534-535



Ufo lens dali
538-539



Ufo
545

## Solar lighting

638



NEW
Gam
641



Popa
643



Proa
644



Egna
647



Iris
649



Visor
651

# Outdoor lighting

546

## Track 48V



NEW
Ice
549



NEW
Atmos track
550



NEW
Bit
551



NEW
Frame
552



NEW
Outdoor track
553

## Floor



Mac
555



Tura
559



Clos
561



Clos base
562-563



Cam
567



Signal
575



Fix
611



Sair
613



Caddie
615



Fade
617



Zas
619



Sky with spike
621

## Wall



NEW
Mac wall base
557



NEW
Sunset XL
581



NEW
Artis
603



NEW
Tween
605



NEW
Oma
495



NEW
Sphere wall
487



WOOD
Mac wall
477



Clos
561



Mini comet
565



Comet
565



Neo
569-570



Neo XL
569-570



Gadir
577

# Outdoor lighting

## Wall



Sunset
579



Lek
583



Blis
585



Selen
587



Zibor
589



Nik
607

## Recessed



NEW
Tween
605



NEW
Artis
603



Sigma
573



Optic
591



Ina
592



Dis
592



Nix
591



Polo
595



Luky
597



Mis
599-600

## Spotlight



Sky switch
623-624



Sky microwave sensor
626



Sky
628



Sky 2.200K
629



Polaris
631



Krion
633

## Portable battery



NEW
Bimba
509



NEW
Madi
637



Lievo
513



Visor
609



Wech
635

# Rings

652



NEW
Luk IP65
663



Avant
655



One
657



Zio
659



Rok
661



Bathroom
665



Eclipse
667



Basculante
669



Fijo
671

# Retrofit

672



NEW
AR111 15°
675



Nitro and Dole
676



Lynk
677



Max
678



Power
679



System
680



Hook
681



Uniform-line
682



Narrow
683



Tutto
684



Adn
685



Uniform-line G4
686



Uniform-line G9
687



Shop, Prisma
688



Pl T40
689

# Retrofit



Cala
690



HQI tubular
691



Lineal
692



Lineal
693



Esférica
694



Standard
695-696



Standard dimmable
697



Globo
698



Globo
699



Flama
700



R-63 S-line
701



Reflectors
702



Reflectors
703



Par
704



Sil
705



Aria
706



Cup
707



Obo
708-709



Smile
712



Noa
713

# Luminaires

# The custom lighting

Our R&D and Production departments are responsible for designing special parts and customized solutions to meet the unique needs of our customers. Our commitment is to offer customized solutions with the highest quality and guaranteed compliance with regulations and certifications.

Our R&D services stand out for:
- Customized Design and Development: Our team of R&D experts works closely with customers to understand their specific challenges and needs. We use cutting-edge technology and creativity to conceive and design custom parts and solutions that perfectly fit your requirements.
- Constant Innovation: We maintain a constant focus on innovation. We are committed to keeping up with the latest trends, technologies, and design practices to ensure that our solutions are always cutting-edge and effective.
- Quality Production: Our production department is equipped with state-of-the-art machinery and a highly trained team. This allows us to carry out the manufacture of parts designed accurately and efficiently, maintaining high quality standards.
- Adaptation to Regulations and Certifications: We understand the importance of complying with regulations and certifications. Our products and solutions are designed and manufactured in strict compliance with applicable standards, thus ensuring safety and compliance with current regulations.
- Energy efficiency: With the need to change consumption patterns and in line with the sustainable development objectives of the 2030 Agenda, we are increasingly trying to develop environmental and sustainability policies, both in our products and services, as well as in all phases of the production chain.
- Efficiency and cost-effectiveness: We take advantage of technology and innovation to optimize processes and maximize production efficiency. This not only guarantees quality, but also cost-effectiveness for our customers.
- Personalized Customer Service: We pride ourselves on providing world-class customer service. We are available to answer your questions, adjust designs according to your changing needs, and provide exceptional after-sales service.


When you trust our R&D and production department, you are choosing a complete solution tailored to your needs, backed by quality, innovation and commitment to regulations and certifications. We are ready to be your partner in the search for customized solutions of the highest quality.
Contact us and find out how we can help you achieve your goals!

Nuestros departamentos de I+D y de Producción son los encargados de diseñar piezas especiales y soluciones a medida para satisfacer las necesidades únicas de nuestros clientes. Nuestro compromiso es ofrecer soluciones personalizadas con la máxima calidad y garantía de cumplimiento de normativas y certificaciones.


Nuestros servicios de I+D destacan por:
- Diseño y Desarrollo Personalizado: Nuestro equipo de expertos en I+D trabaja de cerca con los clientes para comprender sus desafíos y necesidades específicas. Utilizamos tecnología de vanguardia y creatividad para concebir y diseñar piezas y soluciones a medida que se adapten perfectamente a sus requerimientos.
- Innovación Constante: Mantenemos un enfoque constante en la innovación. Estamos comprometidos a mantenernos al tanto de las últimas tendencias, tecnologías y prácticas de diseño para asegurarnos de que nuestras soluciones sean siempre vanguardistas y eficaces.
- Producción de Calidad: Nuestro departamento de producción cuenta con maquinaria de última generación y un equipo altamente capacitado. Esto nos permite llevar a cabo la fabricación de las piezas diseñadas de manera precisa y eficiente, manteniendo altos estándares de calidad.
- Adaptación a Normativas y Certificaciones: Entendemos la importancia de cumplir con las normativas y certificaciones. Nuestros productos y soluciones son diseñados y fabricados con estricto cumplimiento de los estándares aplicables, garantizando así la seguridad y la conformidad con la normativa vigente.
- Eficiencia energética: Con la necesidad de cambiar los modelos de consumo y en la línea de los objetivos de desarrollo sostenible de la Agenda 2030, cada vez más se intenta desarrollar políticas medioambientales y de sostenibilidad, tanto en nuestros productos y servicios, como en todas las fases de su cadena de producción.
- Eficiencia y Costo-efectividad: Aprovechamos la tecnología y la innovación para optimizar procesos y maximizar la eficiencia en la producción. Esto no solo garantiza la calidad, sino también un costo razonable para nuestros clientes.
- Atención al Cliente Personalizada: Nos enorgullece ofrecer un servicio al cliente de primer nivel. Estamos disponibles para atender sus preguntas, ajustar diseños según sus necesidades cambiantes y brindar un servicio postventa excepcional.

Cuando confía en nuestro departamento de I+D y producción, está eligiendo una solución completa y adaptada a sus necesidades, respaldada por la calidad, la innovación y el compromiso con las normativas y certificaciones. Estamos listos para ser su socio en la búsqueda de soluciones personalizadas de la más alta calidad.
¡Contáctenos y descubra cómo podemos ayudarle a alcanzar sus objetivos!


BENEITO FAURE

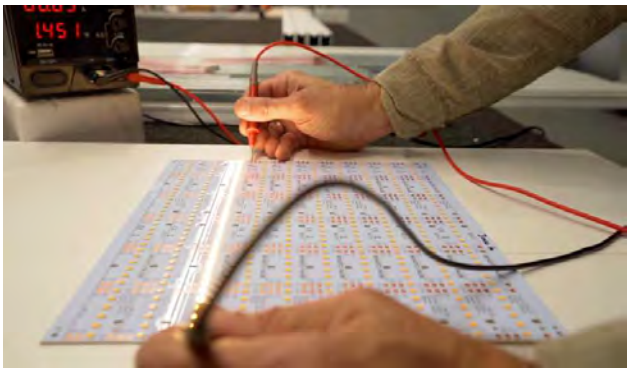




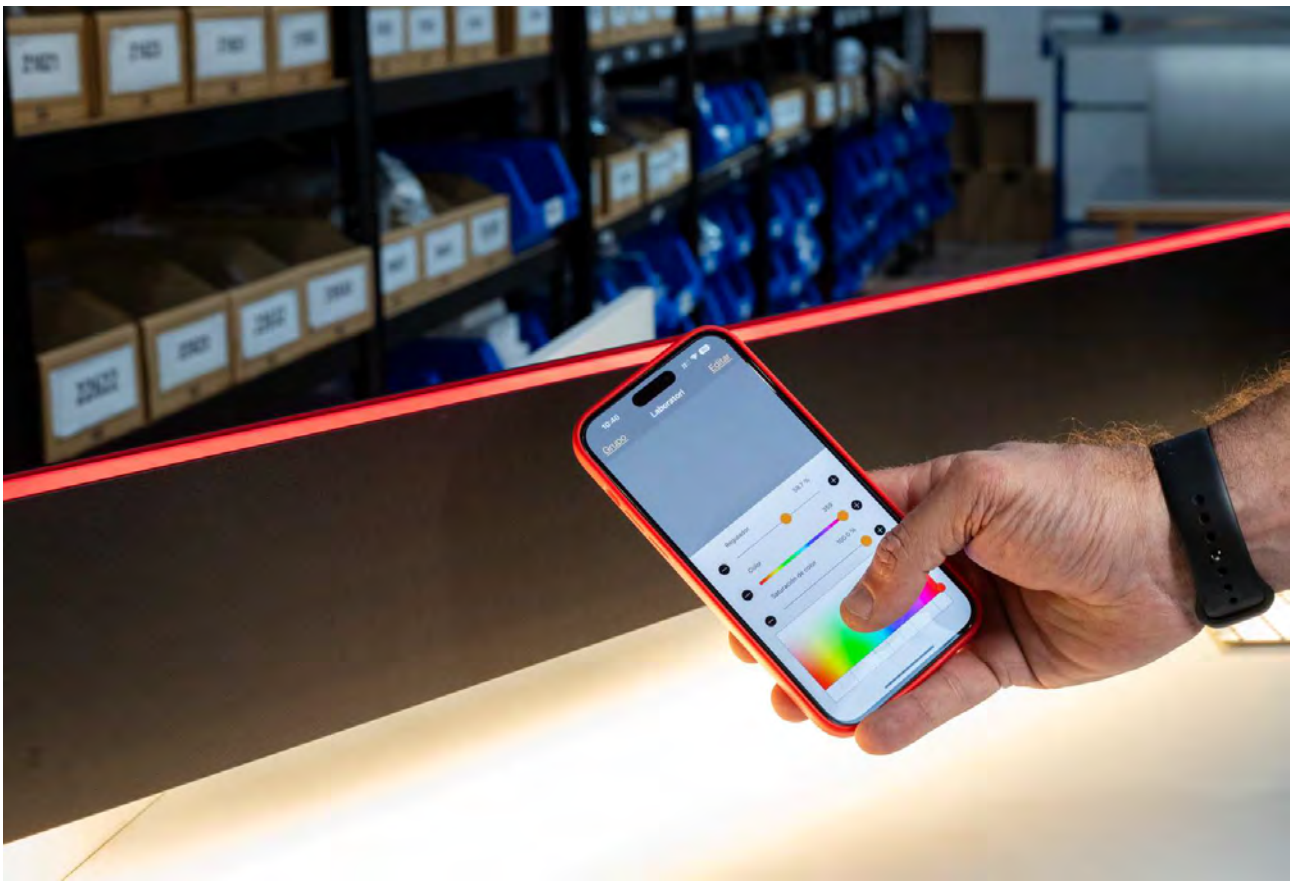



# Do you want a custom-made **luminaire**?

Look for the Cutting symbol and consult our sales department!



Customisation of the cut and
handling to the requested size.



# Do you want to customize **your luminaires**?

Look for the RAL or Electrolytic Plating symbol and consult our sales department!



Custom RAL



Electrolytic Plating

| | Model | Page | Power | Section Size | Installation | |
|---|---|---|---|---|---|---|
| | URBAN | 55 | 46W/57W/69W/80W/ 103W | 58x68 mm |  | Surface / Pendant |
| | URBAN ASYMMETRIC | 64 | 25W/31W/37W/43W/ 55W | 58x68 mm |  | Surface / Pendant |
| | URBAN MARKET | 70 | 45W/55,5W/66W/ 76,5W/97,5W | 58x68 mm |  | Surface / Pendant |
| | TIME | 73 | 31W/46W/69W | 39x75 mm |  | Surface / Pendant |
| | TRITON DOWN | 147 | 46W/57W/69W/80W /103W | 47x66 mm |  | Surface / Pendant |
| NEW | EVO MINI | 49 | 38W/56W/74W | 28x25 mm |  | Surface / Pendant |
| NEW | EVO R | 50 | 38W/56W/74W | 35x25 mm |  | Surface / Pendant |
| NEW | MINIMUS | 103 | 25W/31W/37W/43W | 16x25 mm |  | Surface / Pendant |
| NEW | KUBO | 85 | 31W/38W/46W/54W | 35x35 mm |  | Surface / Pendant |
| | ZERO DESIGN | 126-127 | 22W/m | 35x35 mm |  | Surface / Pendant |
| | DAU | 105 | 18W/23W/26W/30W | 25x25 mm |  | Surface / Pendant |
| | DUAL | 77 | 18-24W/28-35W/ 46-52W | 39x125 mm |  | Pendant |
| | URBAN TRAIN | 58 | 46W/57W/69W/80W | 58x68 mm |  | Pendant |
| | URBAN FLY | 60 | 2X14W/3X14W 4X14W/6X14W | 58x68 mm |  | Pendant |
| | URBAN WORK | 61 | 35W/43W/51W/ 59W/97,5W | 58x68 mm |  | Pendant |
| | FOREST | 79 | 31W/38W/46W/53W | 64x95 mm |  | Pendant |
| NEW | EVO FLY | 45 | 44W/55W/66W/77W | 24x75 mm |  | Pendant |
| NEW | EVO DUAL | 47 | 49W/61W/73W/86W | 24x75 mm |  | Pendant / Wall |
| | FILTER | 93 | 32W/120W | Ø60 mm |  | Pendant |
| | TUBI | 95 | 35W/44W/53W/62W | Ø62 mm |  | Pendant |
| | NEXUS | 76 | 46W/70W | 39x75 mm |  | Pendant |
| NEW | EVO | 43 | 38W/56W/74W | 28x60 mm |  | Pendant |
| NEW | MIRROW | 89 | 85W/94W | 35x35 mm |  | Pendant |
| NEW | TAX | 91 | 52W/64W | 35x35 mm |  | Pendant |
| | GRIP | 99 | 26W/33W/39W/46W | Ø28 mm |  | Pendant |
| | SQUARE | 109 | 43W/62W | 25x25 mm |  | Pendant |

| CRI | CCT | IP | Custom | Standard finishes |
|---|---|---|---|---|
| ≥95 CRI | 2700K 3000K 4000K 5000K CCT | 40 IP | YES | White Black Gray Matt Gold Corten Copper |
| ≥95 CRI | 2700K 3000K 4000K | 40 IP | YES | White |
| 80/93 CRI | 3000K MEAT R HAM MEAT M 4000K FISH FRUIT BREAD | 40 IP | ⓘ | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K | 40 IP | YES | White Black Gray |
| ≥95 CRI | 2700K 3000K 4000K 5500K | 65 IP | YES | White Black |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | YES | White Black |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | YES | White Black |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | NO | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K RGB-W CCT | 20 IP | YES | White Black |
| ≥80 CRI | 2700K 3000K 4000K CCT | 20 IP | YES | White Black Gray Matt Gold |
| ≥90 CRI | 2700K 3000K 4000K 5000K RGB-W CCT | 20 IP | NO | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K | 40 IP | YES | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K | 40 IP | YES | White Black |
| ≥90 CRI | 3000K 4000K | 40 IP | YES | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K | 40 IP | YES | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K CCT | 40 IP | NO | Wood |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | YES | White Black |
| ≥80 CRI | 2700K 3000K 4000K RGB-W CCT | 40 IP | NO | White Black |
| ≥90 CRI | 2700K 3000K 4000K RGB | 20 IP | NO | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K RGB-W CCT | 40 IP | NO | White Black |
| ≥95 CRI | CCT | 40 IP | YES | White Black Gray |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | YES | White Black |
| ≥95 CRI | 2700K 3000K 4000K RGB-W CCT | 20 IP | YES | White Black |
| ≥95 CRI | 2700K 3000K 4000K RGB-W CCT | 20 IP | ⓘ | White Black |
| ≥90 CRI | 2700K 3000K 4000K RGB CCT | 40 IP | NO | Black |
| ≥90 CRI | 2700K 3000K 4000K RGB-W CCT | 20 IP | YES | White Black Matt Gold Silver |

ⓘ Consult delivery terms and conditions.

| | Model | Page | Power | Section Size | Installation | |
|---|---|---|---|---|---|---|
| NEW | NYNETO | 101 | 16W/20W/24W/28W | 10x12 mm |  | Pendant |
| NEW | KAA LINE | 137 | 30W/60W/100W | Ø25 mm |  | Pendant |
| NEW | KAA | 135 | 90W/180W/300W | Ø25 mm |  | Pendant |
| | ZERO XL | 119 | 78W/105W/131W | 100x90 mm |  | Pendant |
| | ZERO DUAL | 133 | 107W/162W/325W | 50x60 mm |  | Pendant |
| | ZERO DIRECT | 123 | 35W/55W/75W/94W 189W | 35x35 mm |  | Pendant |
| NEW | ZERO IN | 111 | 26W/44W/63W/96W | 38x22 mm |  | Pendant |
| NEW | CIRCUS | 113 | 26W/44W/63W | 38x22 mm |  | Pendant |
| NEW | TUNDRA | 115 | 56W/81W | 38x22 mm |  | Pendant |
| NEW | ZERO OUT | 117 | 26W/44W/63W/96W | 38x22 mm |  | Pendant |
| NEW | HORIZON | 139 | 62W/75W/94W/189W | 15 mm |  | Pendant |
| | URBAN E | 57 | 46W/57W/69W/80W /103W | 75x68 mm |  | Recessed |
| | TIME E | 74 | 31W/46W/69W | 54x75 mm |  | Recessed |
| | KUBO E | 86 | 31W/38W/46W/54W | 50x35 mm |  | Recessed |
| NEW | EVO E | 53 | 10W/21W/31W/42W 52W/63W/73W | 34x25 mm |  | Recessed |
| | DAU E | 106 | 18W/23W/26W/30W | 34x25 mm |  | Recessed |
| | URBAN WALL SENSOR | 62 | 21W/32W/43W | 58x68 mm |  | Wall |
| | TIME WALL SENSOR | 81 | 15W/23W/31W | 39x75 mm |  | Wall |
| NEW | TUBI WALL | 97 | 35W/44W/53W | Ø62 mm |  | Wall |
| | TRITON | 143 | 21W/41W/61W | 47x66 mm |  | Surface |
| | FLASH | 141 | 16W/27W/35W/46W /55W | 18x49 mm |  | Wall |
| NEW | EVO TRACK | 51 | 38W/56W/74W | 90x57 mm |  | Track |
| | URBAN TRACK | 68 | 21W/32W/43W | 58x68 mm |  | Track |
| | TIME TRACK | 83 | 15W/23W/31W | 39x75 mm |  | Track |
| NEW | BLABER LINE | 151 | 30W/39W/49W | 54x300 mm |  | Pendant |
| NEW | BLABER | 153-157 | | | | Pendant |

| CRI | CCT | IP | Custom | Standard finishes |
|---|---|---|---|---|
| ≥90 CRI | 2700K 3000K 4000K | 20 IP | NO | White Black |
| ≥90 CRI | 2400K 2700K 3000K 4000K RGB-W CCT | 40 IP | ⓘ | White Black Matt Gold |
| ≥90 CRI | 2400K 2700K 3000K 4000K CCT | 40 IP | ⓘ | White Black |
| ≥80 CRI | 3000K 4000K | 20 IP | NO | White Black Gray |
| ≥80 CRI | 3000K 4000K | 20 IP | NO | White Black |
| ≥80 CRI | 2700K 3000K 4000K CCT | 20 IP | YES | White Black Matt Gold Silver |
| ≥90 CRI | 2700K 3000K 4000K RGB-W CCT | 20 IP | YES | White Black Matt Gold Silver |
| ≥90 CRI | 2700K 3000K 4000K RGB-W CCT | 20 IP | NO | White Black Matt Gold Silver |
| ≥80 CRI | 2700K 3000K 4000K RGB-W CCT | 20 IP | YES | White Black Matt Gold Silver |
| ≥90 CRI | 2700K 3000K 4000K RGB-W CCT | 20 IP | YES | White Black Matt Gold Silver |
| ≥90 CRI | 2700K 3000K 4000K | 20 IP | NO | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K CCT | 40 IP | YES | White Black Gray |
| ≥95 CRI | 2700K 3000K 4000K 5000K | 40 IP | YES | White Black Gray |
| ≥95 CRI | 2700K 3000K 4000K RGB-W CCT | 40 IP | NO | White Black |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | YES | White Black |
| ≥90 CRI | 2700K 3000K 4000K 5000K RGB-W CCT | 20 IP | NO | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K | 20 IP | YES | White Black Gray |
| ≥95 CRI | 2700K 3000K 4000K 5000K | 20 IP | YES | White Black Gray |
| ≥95 CRI | 2700K 3000K 4000K RGB-W CCT | 40 IP | NO | White Black |
| ≥80 CRI | 2700K 3000K 4000K | 65 IP | YES | Black |
| ≥80 CRI | 2700K 3000K 4000K 6000K | 20 IP | NO | White Black Alum. |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | NO | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K CCT | 20 IP | ⓘ | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K | 20 IP | ⓘ | White Black |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | YES | |
| | | | YES | |


ⓘ Consult delivery terms and conditions.



New


## Evo






Equipment

Ø60x28mm




Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 38W / 56W / 74W |
| Lumens | 3.458 lm - 8.954 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 2 | Black Slats (60°) | N | 1.170mm | 2 | 2.700K (91-104 lm/W) - 34W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | White Slats (60°) | P | 1.730mm | 4 | 3.000K (96-109 lm/W) - 34W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 2.290mm | 6 | 4.000K (103/121 lm/W) - 34W/m | 4 | Push | 3 | Custom RAL | C |
| | | | | | | | | Casambi | 5 | | |

Code: 2

CE RoHS EMC

Consult delivery terms and conditions.

*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 3,37m Max | PUSH | DALI 2



New

## Evo fly






Equipment

Ø60x28mm




Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 44W / 55W / 66W / 77W |
| Lumens | 4.004 lm - 9.317 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Down Rigid / Up Flex |

| Code | Diffuser (Angle) | Size (Power) | CCT (lm/W) | Driver | Colour |
|---|---|---|---|---|---|
| Code 4 | Down Black Slats (60°) Up Opal N | 1.120mm (44W) 4 | 2.700K Down (91-104 lm/W) Up (88 lm/W) 2 | On / Off 1 | White (9003) 1 |
| | Down White Slats (60°) Up Opal P | 1.400mm (55W) 5 | 3.000K Down (96-109 lm/W) Up (92 lm/W) 3 | Dali 2 | Black (9005) 2 |
| | | 1.680mm (66W) 6 | 4.000K Down (104-121 lm/W) Up (96 lm/W) 4 | Push 3 | ⓘ Custom RAL C |
| | | 1.960mm (77W) 7 | | Casambi 5 | |

Code: 4

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,96m Max | PUSH | DALI 2



New

## Evo dual



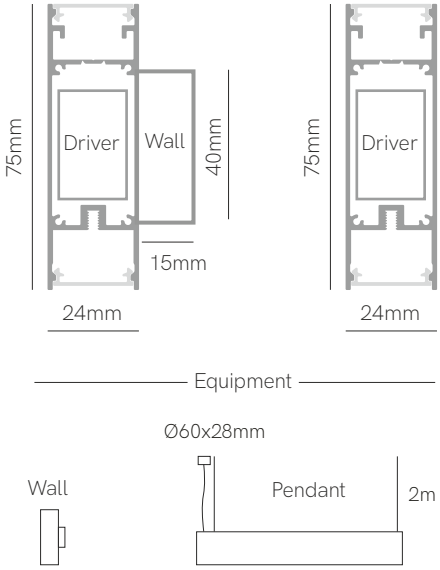


Control accessories pages 282-289.

*Finished luminaire. Includes power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 49W / 61W / 73W / 86W |
| Lumens | 5.145 lm - 11.696 lm |
| Installation | Pendant / Wall |
| Material | Aluminium |
| PCB | Flex |

| Code | |
|---|---|
| Code | 5 |

| Installation | |
|---|---|
| Pendant | 3 |
| Wall | 7 |

| Size (Power) | |
|---|---|
| 1.120mm (49W) | 4 |
| 1.400mm (61W) | 5 |
| 1.680mm (73W) | 6 |
| 1.960mm (86W) | 7 |

| CCT (lm/W) | |
|---|---|
| Down-Up 2.700K (124 lm/W) | 2 |
| Down-Up 3.000K (128 lm/W) | 3 |
| Down-Up 4.000K (136 lm/W) | 4 |
| Down-Up RGB-W (100 lm/W) | 8 |
| Down-Up 2.700-5.500K (105 lm/W) | 9 |
| Down 2.700-5.500K Up RGB-W | C |
| Down 2.700K Up RGB-W | D |
| Down 3.000K Up RGB-W | T |
| Down 4.000K Up RGB-W | Q |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: 5

CE RoHS EMC

Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥80 | 1,96m Max | tuya | PUSH | DALI 2




New

## Evo mini

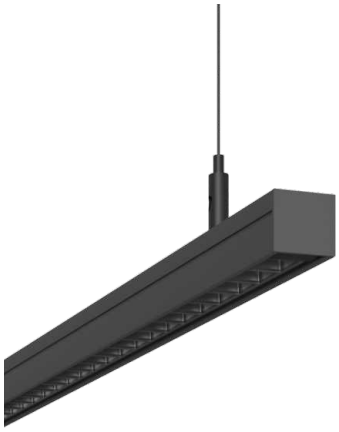




Equipment

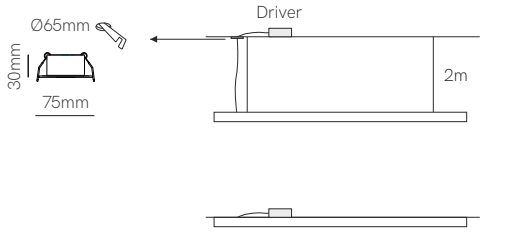


Control accessories pages 282-289.

*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 38W / 56W / 74W |
| Lumens | 3.458 lm - 8.954 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 8 | Black Slats (60°) | N | 1.170mm | 2 | 2.700K (91-104 lm/W) - 34W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | White Slats (60°) | P | 1.730mm | 4 | 3.000K (96-109 lm/W) - 34W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 2.290mm | 6 | 4.000K (103/121 lm/W) - 34W/m | 4 | Push | 3 | Custom RAL | C |
| | | | | | | | | Casambi | 5 | | |

Code: 8

CE RoHS EAC


Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 3,37m Max | PUSH | DALI 2


New

## Evo R






Equipment

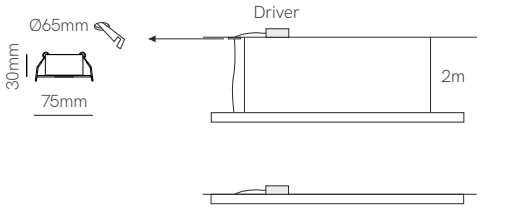


Control accessories pages 282-289.

*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 38W / 56W / 74W |
| Lumens | 3.458 lm - 8.954 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 3 | Black Slats (60°) | N | 1.170mm | 2 | 2.700K (91-104 lm/W) - 34W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | White Slats (60°) | P | 1.730mm | 4 | 3.000K (96-109 lm/W) - 34W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 2.290mm | 6 | 4.000K (103/121 lm/W) - 34W/m | 4 | Push | 3 | Custom RAL | C |
| | | | | | | | | Casambi | 5 | | |

Code: 3

CE RoHS EAC


Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 3,37m Max | PUSH | DALI 2


New

## Evo track



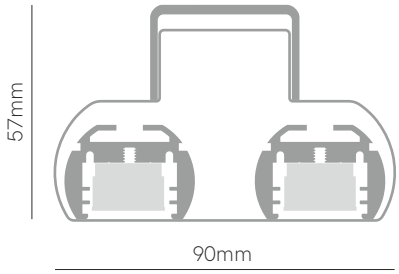


Equipment



*Finished luminaire.

## Technical Information

| | |
|---|---|
| Power | 38W / 56W / 74W |
| Lumens | 3.458 lm - 7.622 lm |
| Installation | Three Phase Track |
| Material | Aluminium |
| PCB | Rigid |

| Code | Diffuser (Angle) | Size | CCT (lm/W) - Power/m | Driver | Colour |
|---|---|---|---|---|---|
| Code 9 | Black Slats (30°) C | 610mm 2 | 2.700K (91 lm/W) - 34W/m 2 | On / Off 1 | White (9003) 1 |
| | White Slats (30°) F | 890mm 3 | 3.000K (96 lm/W) - 34W/m 3 | | Black (9005) 2 |
| | Black Slats (60°) M | 1.170mm 4 | 4.000K (103 lm/W) - 34W/m 4 | | ⓘ Custom RAL C |
| | White Slats (60°) P | | | | |

Code: 9 1

CE RoHS EMC


ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,17m Max





New

## Evo E

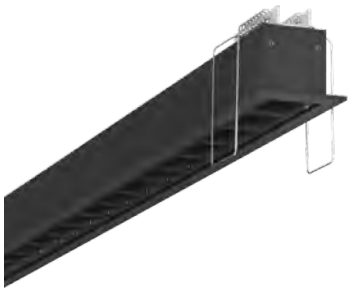




Control accessories pages 282-289.

*Finished luminaire. Includes driver, spring clips, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 10W / 21W / 31W / 42W / 52W / 63W / 73W |
| Lumens | 910 lm - 8.833 lm |
| Installation | Recessed |
| Material | Aluminium |
| PCB | Rigid |

| Code | |
|---|---|
| Code | 5 |

| Diffuser (Angle) | |
|---|---|
| Black Slats (60°) | N |
| White Slats (60°) | P |

| Size | |
|---|---|
| 280mm | 1 |
| 560mm | 2 |
| 840mm | 3 |
| 1.120mm | 4 |
| 1.400mm | 5 |
| 1.680mm | 6 |
| 1.960mm | 7 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (91-104 lm/W) - 34W/m | 2 |
| 3.000K (96-109 lm/W) - 34W/m | 3 |
| 4.000K (104-121 lm/W) - 34W/m | 4 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |


| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: 5

CE RoHS EMC

Consult delivery terms and conditions.
*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,96m Max | PUSH | DALI 2

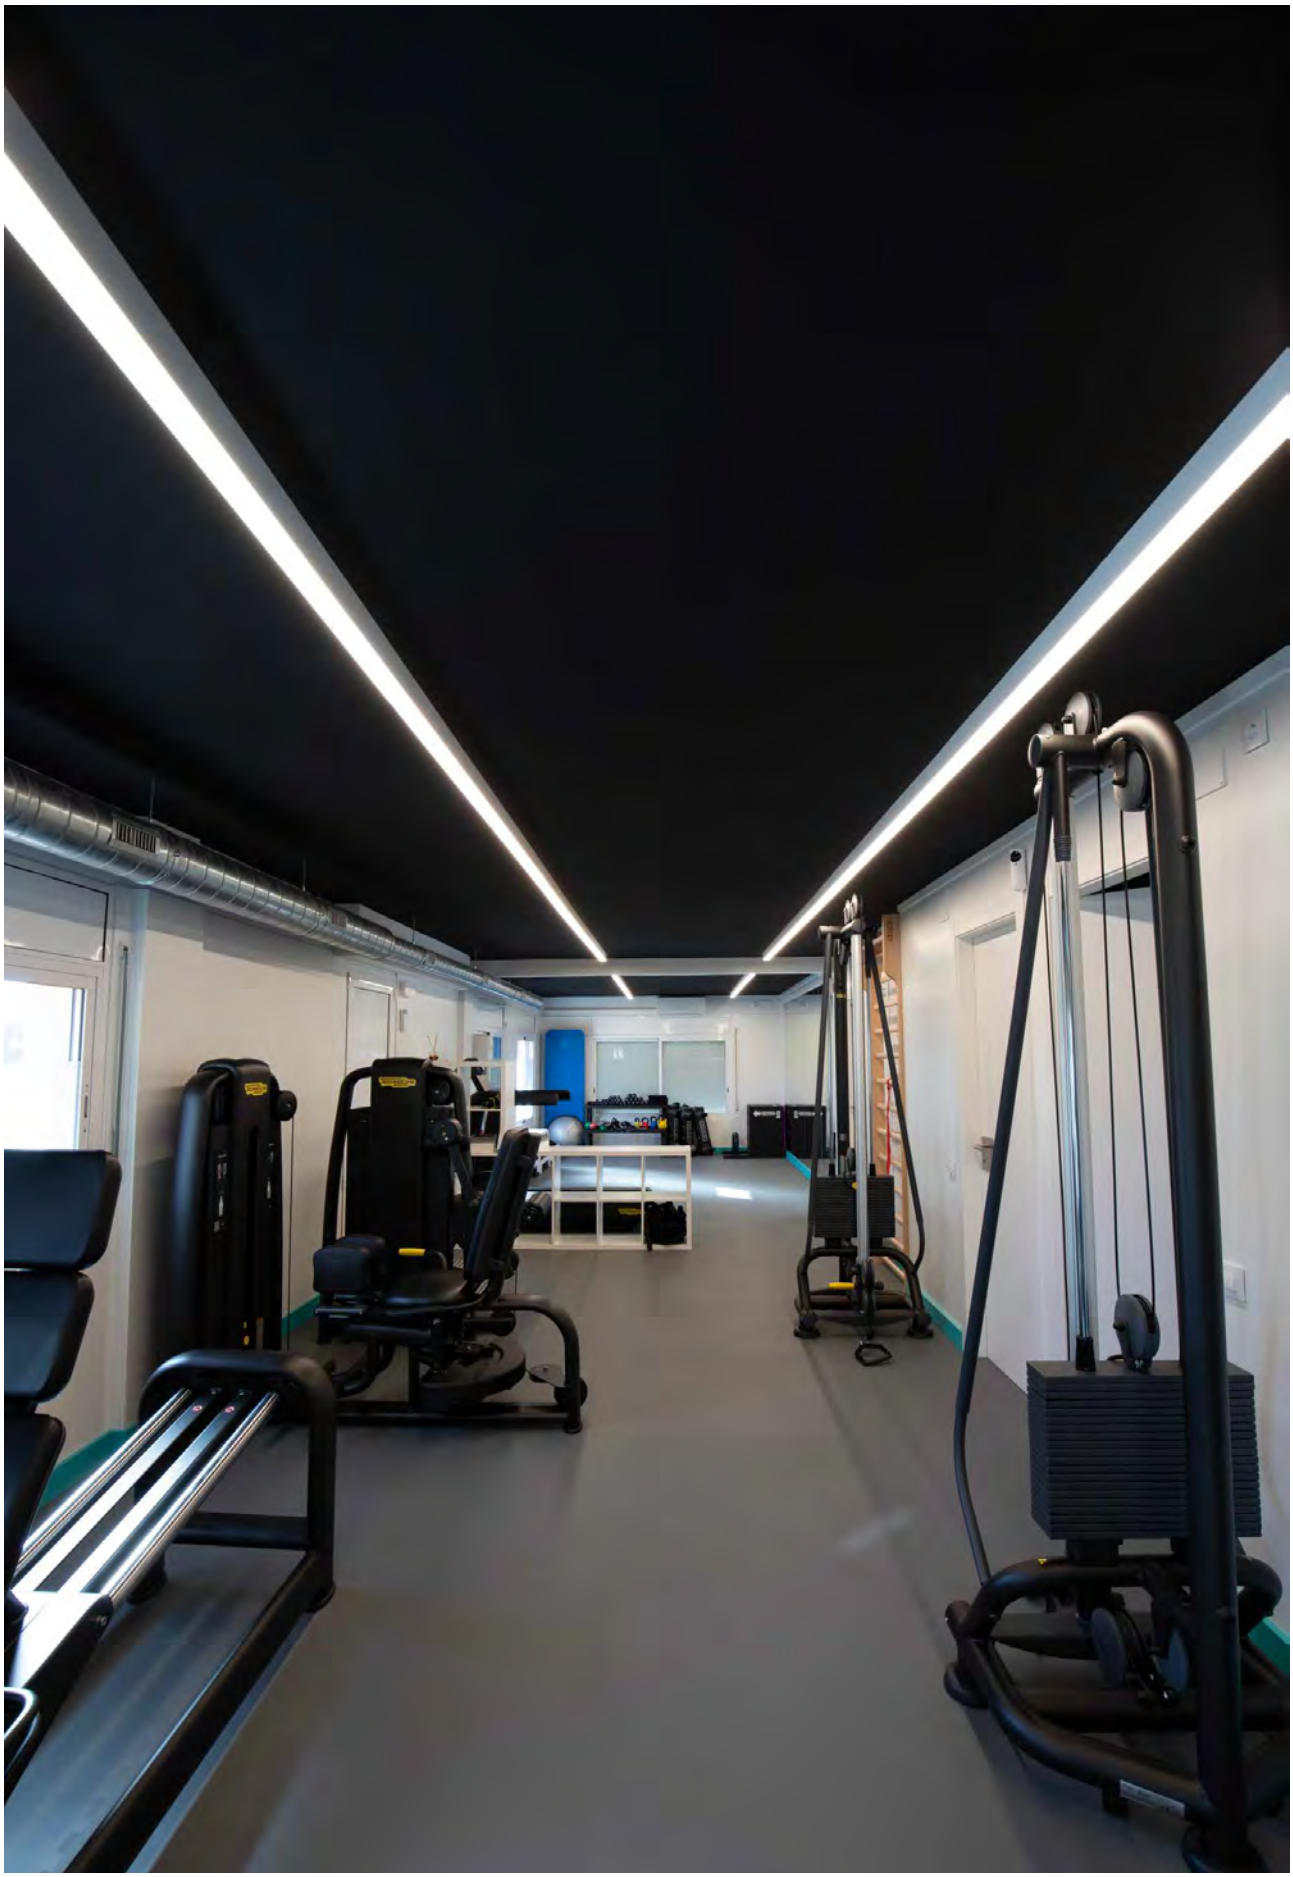

Personal training room, Collbató (Spain).

## Urban






Control accessories pages 282-289.

## Technical Information

| | |
|---|---|
| Power | 46W / 57W / 69W / 80W / 103W |
| Lumens | 5.152 lm - 14.008 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 6 | UGR (78°) | 4 | 1.130mm | 3 | 2.700K (112 lm/W) - 40W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | Opal (112°) | 5 | 1.410mm | 4 | 3.000K (128 lm/W) - 40W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (136 lm/W) - 40W/m | 4 | Push | 3 | Gray (9006) | 3 |
| | | | | 1.970mm | 6 | 5.000K (136 lm/W) - 40W/m | 5 | Casambi | 5 | ⓘ Matt Gold | 4 |
| | | | | 2.530mm | 7 | 2.700-5.500K (105 lm/W) - 40W/m | 9 | Tuya | 7 | ⓘ Corten | 6 |
| | | | | | | | | | | ⓘ Copper | 7 |
| | | | | | | | | | | ⓘ Custom RAL | C |
| | | | | | | | | | | ⓘ Electrolytic Plating | |

Code: 6

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

## Accessories



End caps
- 40721
- 40722
- 40723



Joint 180°
- 40220



Joint 90°
- 40550



Wall bracket
- 40851
- 40852
- 40853



Trimless
- 40669



Base 3x0,75 (2,5m) Ø60x28mm
- 40881
- 40882
- 40883



Base 5x0,5 (2,5m) Ø60x28mm
- 40991
- 40992
- 40993



Ceiling suspension
- 40780



Suspension Kit
- 40790 (2m)


CE RoHS EMC

Accessories pages 158-159.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI 2

## Urban E



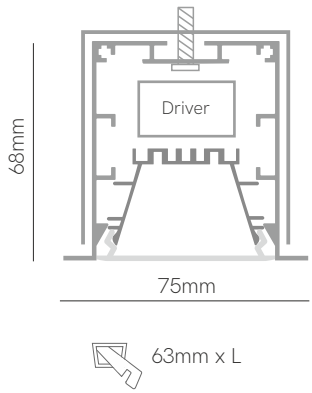


Control accessories pages 282-289.

*Spring clips included.

## Technical Information

| | |
|---|---|
| Power | 46W / 57W / 69W / 80W / 103W |
| Lumens | 5.152 lm - 14.008 lm |
| Installation | Recessed |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 3 | UGR (78°) | 4 | 1.130mm | 3 | 2.700K (112 lm/W) - 40W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | Opal (112°) | 5 | 1.410mm | 4 | 3.000K (128 lm/W) - 40W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (136 lm/W) - 40W/m | 4 | Push | 3 | Gray (9006) | 3 |
| | | | | 1.970mm | 6 | 5.000K (136 lm/W) - 40W/m | 5 | Casambi | 5 | Custom RAL | C |
| | | | | 2.530mm | 7 | 2.700-5.500K (105 lm/W) - 40W/m | 9 | Tuya | 7 | Electrolytic Plating | |

Code: 3

Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

## Accessories



End caps
- 40731
- 40732
- 40733



Joint 180°
- 40220



Joint 90°
- 40550

CE RoHS EAC


Accessories pages 158-159.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI 2



0000123

## Urban train






Equipment




Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 46W / 57W / 69W / 80W |
| Lumens | 5.152 lm - 10.880 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 6 | Black Slats (62°) | 2 | 1.130mm | 3 | 2.700K (112 lm/W) - 40W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | Alum. Slats (84°) | 7 | 1.410mm | 4 | 3.000K (128 lm/W) - 40W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (136 lm/W) - 40W/m | 4 | Push | 3 | ⓘ Custom RAL | C |
| | | | | 1.970mm | 6 | 5.000K (136 lm/W) - 40W/m | 5 | Casambi | 5 | ⓘ Electrolytic Plating | |

Code: 6

Accessories pages 158-159.

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.


CE RoHS EAC

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2




## Urban fly






Equipment




**4.** 2x14W = 1.130mm

**5.** 3x14W = 1.690mm

**7.** 4x14W = 1.130mm

**8.** 6x14W = 1.690mm

Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 2x14W / 3x14W / 4x14W / 6x14W |
| Lumens | 3.640 lm - 11.424 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | Diffuser (Angle) | Size (Power) | CCT (lm/W) | Driver | Colour |
|---|---|---|---|---|---|
| Code **6** | Optical (50°) **9** | 1.130mm (28W) **4** | 3.000K (130 lm/W) **3** | On / Off **1** | White (9003) **1** |
| | | 1.690mm (42W) **5** | 4.000K (136 lm/W) **4** | Dali **2** | Black (9005) **2** |
| | | 1.130mm (56W) New **7** | | Push **3** | ⓘ Custom RAL **C** |
| | | 1.690mm (84W) New **8** | | Casambi **5** | ⓘ Electrolytic Plating |

Code: 6 9

Accessories pages 158-159.

ⓘ Consult delivery terms and conditions.


*Create your code acording to your preferences.

CE RoHS EAC


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2

## Urban work






Equipment




Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 35W / 43W / 51W / 59W / 97,5W |
| Lumens | 3.675 lm - 11.505 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 6 | Retracted (102°) | 3 | 1.130mm | 3 | 2.700K (105 lm/W) - 31W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.410mm | 4 | 3.000K (112 lm/W) - 31W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (118 lm/W) - 31W/m | 4 | Push | 3 | ⓘ Custom RAL | C |
| | | | | 1.970mm | 6 | 5.000K (118 lm/W) - 31W/m | 5 | Casambi | 5 | ⓘ Electrolytic Plating | |
| | | | | 2.530mm | 7 | | | | | | |

Code: 6 3

Accessories pages 158-159.

ⓘ Consult delivery terms and conditions.


*Create your code acording to your preferences.

CE RoHS EAC

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2

## Urban wall sensor



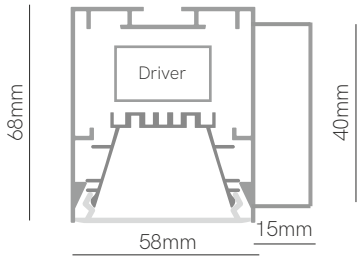


*Finished luminaire. Includes power supply, base wall and end caps.

### Technical Information

| | |
|---|---|
| Power | 21W / 32W / 43W |
| Lumens | 2.352 lm - 5.848 lm |
| Installation | Wall |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 6 | Opal (112°) | 1 | 570mm | 1 | 2.700K (112 lm/W) - 40W/m | 2 | PIR | 0 | White (9003) | 1 |
| | | | | 840mm | 2 | 3.000K (128 lm/W) - 40W/m | 3 | | | Black (9005) | 2 |
| | | | | 1.130mm | 3 | 4.000K (136 lm/W) - 40W/m | 4 | | | Gray (9006) | 3 |
| | | | | | | 5.000K (136 lm/W) - 40W/m | 5 | | | ⓘ Custom RAL | C |
| | | | | | | | | | | ⓘ Electrolytic Plating | |

Code: 6 1 0

CE RoHS


ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | 2m 100° | PF >0,9 | CRI ≥95


3

## Urban asymmetric






Control accessories pages 282-289.

## Technical Information

| | |
|---|---|
| Power | 25W / 31W / 37W / 43W / 55W |
| Lumens | 1.650 lm - 4.290 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Flex |

| Code | |
|---|---|
| Code | 6 |

| Diffuser (Angle) | |
|---|---|
| Opal asym. | 8 |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.410mm | 4 |
| 1.690mm | 5 |
| 1.970mm | 6 |
| 2.530mm | 7 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (66 lm/W) - 22W/m | 2 |
| 3.000K (72 lm/W) - 22W/m | 3 |
| 4.000K (78 lm/W) - 22W/m | 4 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |

| Colour | |
|---|---|
| White (9003) | 1 |
| ⓘ Custom RAL | C |
| ⓘ Electrolytic Plating | |

Code: 6 8 1

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.

## Accessories



End caps
- ☐ 40721
- ■ 40722
- ☐ 40723



Joint 180°
- ■ 40220



Joint 90°
- ■ 40550



Base 3x0,75 (2,5m) Ø60x28mm
- ☐ 40881



Base 5x0,5 (2,5m) Ø60x28mm
- ☐ 40991



Ceiling suspension
- ■ 40780



Suspension Kit
- ■ 40790 (2m)

CE RoHS EAC

Accessories pages 158-159.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2









## Urban track









Control accessories pages 282-289.

*Finished luminaire.

### Technical Information

| | |
|---|---|
| Power | 21W / 32W / 43W |
| Lumens | 2.352 lm - 5.848 lm |
| Installation | Three Phase Track |
| Material | Aluminium |
| PCB | Rigid |

| Code | |
|---|---|
| Code | 6 |

| Diffuser (Angle) | |
|---|---|
| UGR (78°) | 4 |
| Opal (112°) | 5 |

| Size | |
|---|---|
| 570mm | 4 |
| 840mm | 6 |
| 1.130mm | 8 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (112 lm/W) - 40W/m | 2 |
| 3.000K (128 lm/W) - 40W/m | 3 |
| 4.000K (136 lm/W) - 40W/m | 4 |
| 5.000K (136 lm/W) - 40W/m | 5 |
| 2.700-5.500K (105 lm/W) - 40W/m | 9 |

| Driver | |
|---|---|
| On / Off | 4 |
| Casambi | 6 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: 6

CE RoHS EMC

Consult delivery terms and conditions.


*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | UGR <19 (4) | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH



## Urban market






Control accessories pages 282-289.

## Technical Information

| | |
|---|---|
| Power | 45W / 55,5W / 66W / 76,5W / 97,5W |
| Lumens | 5.040 lm - 13.552 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | |
|---|---|
| Code | 2 |

| Diffuser (Angle) | |
|---|---|
| Asymmetric | 1 |
| Double asym. | 2 |
| Optical (30°) | 3 |
| Optical (60°) | 6 |
| Optical (90°) | 9 |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.410mm | 4 |
| 1.690mm | 5 |
| 1.970mm | 6 |
| 2.530mm | 7 |

| CCT (lm/W) - Power/m | |
|---|---|
| 3.000K (112 lm/W) - 40W/m | 3 |
| 4.000K (118 lm/W) - 40W/m | 4 |
| MEAT R - 3.200K (86 lm/W) - 40W/m | R |
| HAM - 3.200K (85 lm/W) - 40W/m | X |
| MEAT M - 3.500K (84 lm/W) - 40W/m | M |
| FISH - 6.500K (139 lm/W) - 40W/m | F |
| FRUIT - 4.200K (123 lm/W) - 40W/m | V |
| BREAD - 2.700K (131 lm/W) - 40W/m | P |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: 2

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.

## Accessories



End caps
☐ 40721
■ 40722



Joint 180°
■ 40220



Joint 90°
■ 40550



Base 3x0,75 (2,5m)
Ø60x28mm
☐ 40881
■ 40882



Base 5x0,5 (2,5m)
Ø60x28mm
☐ 40991
■ 40992



Ceiling suspension
■ 40780



Suspension Kit
■ 40790 (2m)

CE RoHS EMC

Accessories pages 159-159.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI 80/93 | 3,37m Max | DALI 2





## Time






Control accessories pages 282-289.

## Technical Information

| | |
|---|---|
| Power | 31W / 46W / 69W |
| Lumens | 3.472 lm - 9.384 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 8 | UGR (81°) | 3 | 1.130mm | 3 | 2.700K (112 lm/W) - 27W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | Opal (112°) | 5 | 1.690mm | 5 | 3.000K (128 lm/W) - 27W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 2.530mm | 7 | 4.000K (136 lm/W) - 27W/m | 4 | Push | 3 | Gray (9006) | 3 |
| | | | | | | 5.000K (136 lm/W) - 27W/m | 5 | Casambi | 5 | ⓘ Custom RAL | C |
| | | | | | | | | | | ⓘ Electrolytic Plating | |

Code: 8

*Create your code acording to your preferences.

ⓘ Consult delivery terms and conditions.

## Accessories



End caps
- ☐ 40741
- ■ 40742
- ☐ 40743



Joint 180°
- ■ 40770



Joint 90°
- ■ 40990



Wall bracket
- ☐ 40851
- ■ 40852
- ☐ 40853



Trimless
- ■ 40339



Base 3x0,75 (2,5m) Ø60x28mm
- ☐ 40881
- ■ 40882
- ☐ 40883



Base 5x0,5 (2,5m) Ø60x28mm
- ☐ 40991
- ■ 40992
- ☐ 40993



Ceiling suspension
- ■ 40780



Suspension kit
- ■ 40790 (2m)


CE RoHS EAC

Accessories pages 158-159.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2

## Time E



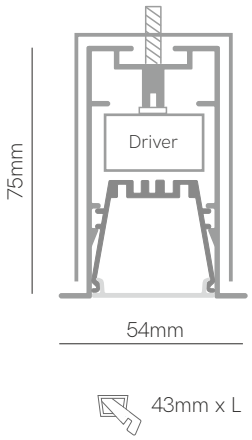


*Spring clips included. Control accessories pages 282-289.

### Technical Information

| | |
|---|---|
| Power | 31W / 46W / 69W |
| Lumens | 3.472 lm - 9.384 lm |
| Installation | Recessed |
| Material | Aluminium |
| PCB | Rigid |

| Code | |
|---|---|
| Code | 9 |

| Diffuser (Angle) | |
|---|---|
| UGR (81°) | 3 |
| Opal (112°) | 5 |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.690mm | 5 |
| 2.530mm | 7 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (112 lm/W) - 27W/m | 2 |
| 3.000K (128 lm/W) - 27W/m | 3 |
| 4.000K (136 lm/W) - 27W/m | 4 |
| 5.000K (136 lm/W) - 27W/m | 5 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Gray (9006) | 3 |
| ⓘ Custom RAL | C |
| ⓘ Electrolytic Plating | |

Code: 9

*Create your code acording to your preferences.

ⓘ Consult delivery terms and conditions.

### Accessories



End caps
- 40751
- 40752
- 40753



Joint 180°
- 40770



Joint 90°
- 40990

CE RoHS EMC


Accessories pages 158-159.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2




## Nexus






Equipment




Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 46W / 70W |
| Lumens | 4.830 lm - 7.350 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | Diffuser (Angle) | Size | CCT (lm/W) - Power/m | Driver | Colour |
|---|---|---|---|---|---|
| Code 4 | UGR (81°) 4 | 1.130mm 3 | 2.700-5.500K (105 lm/W) - 40W/m 9 | Casambi 5 | White (9003) 1 |
| | | 1.690mm 5 | | Tuya 7 | Black (9005) 2 |
| | | | | RF Control 9 | Gray (9006) 3 |
| | | | | | ⓘ Custom RAL C |

Code: 4 4 9

CE RoHS EMC


ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RF included on Driver RF Control.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | RF

## Dual



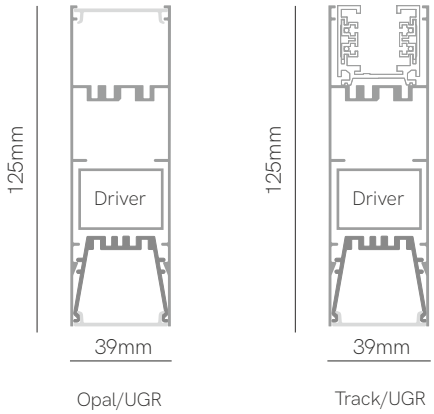


### Equipment




Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 18-24W / 28-35W / 46-52W |
| Lumens | Up 2.016 lm - 6.256 lm / Down 2.688 lm - 7.072 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | Diffuser | Size | CCT (lm/W) - Power/m | Driver | Colour |
|---|---|---|---|---|---|
| Code 5 | Opal/UGR 6 | 1.130mm 3 | 2.700K (112 lm/W) - Down 21W/m Up 15W/m 2 | On / Off 1 | White (9003) 1 |
| | Track/UGR 9 | 1.690mm 5 | 3.000K (128 lm/W) - Down 21W/m Up 15W/m 3 | Dali 2 | Black (9005) 2 |
| | | 2.530mm 7 | 4.000K (136 lm/W) - Down 21W/m Up 15W/m 4 | Push 3 | Custom RAL C |
| | | | 5.000K (136 lm/W) - Down 21W/m Up 15W/m 5 | Casambi 5 | |

Code: 5

CE RoHS EAC


Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2




## Forest






Equipment




Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 31W / 38W / 46W / 53W |
| Lumens | 3.472 lm - 7.208 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | |
|---|---|
| Code | 4 |

| Diffuser (Angle) | |
|---|---|
| UGR (81°) | 3 |
| Opal (112°) | 5 |

| Size | |
|---|---|
| 1.155mm | 3 |
| 1.435mm | 4 |
| 1.715mm | 5 |
| 1.995mm | 6 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (112 lm/W) - 27W/m | 2 |
| 3.000K (128 lm/W) - 27W/m | 3 |
| 4.000K (136 lm/W) - 27W/m | 4 |
| 5.000K (136 lm/W) - 27W/m | 5 |
| 2.700-5.500K (105 lm/W) - 20W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| Wood | 8 |

Code: 4 _ _ _ _ _ 8

CE RoHS EMC

Consult delivery terms and conditions.


*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95 | PUSH | DALI 2



## Time wall sensor






*Finished luminaire. Includes power supply, base wall and end caps.

## Technical Information

| | |
|---|---|
| Power | 15W / 23W / 31W |
| Lumens | 1.680 lm - 4.216 lm |
| Installation | Wall |
| Material | Aluminium |
| PCB | Rigid |


| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 8 | Opal (112°) | 1 | 570mm | 1 | 2.700K (112 lm/W) - 27W/m | 2 | PIR | 0 | White (9003) | 1 |
| | | | | 840mm | 2 | 3.000K (128 lm/W) - 27W/m | 3 | | | Black (9005) | 2 |
| | | | | 1.130mm | 3 | 4.000K (136 lm/W) - 27W/m | 4 | | | Gray (9006) | 3 |
| | | | | | | 5.000K (136 lm/W) - 27W/m | 5 | | | ⓘ Custom RAL | C |
| | | | | | | | | | | ⓘ Electrolytic Plating | |

Code: 8 1 0

CE RoHS EMC


ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 2m 100° | 230 VAC | PF >0,9 | CRI ≥95

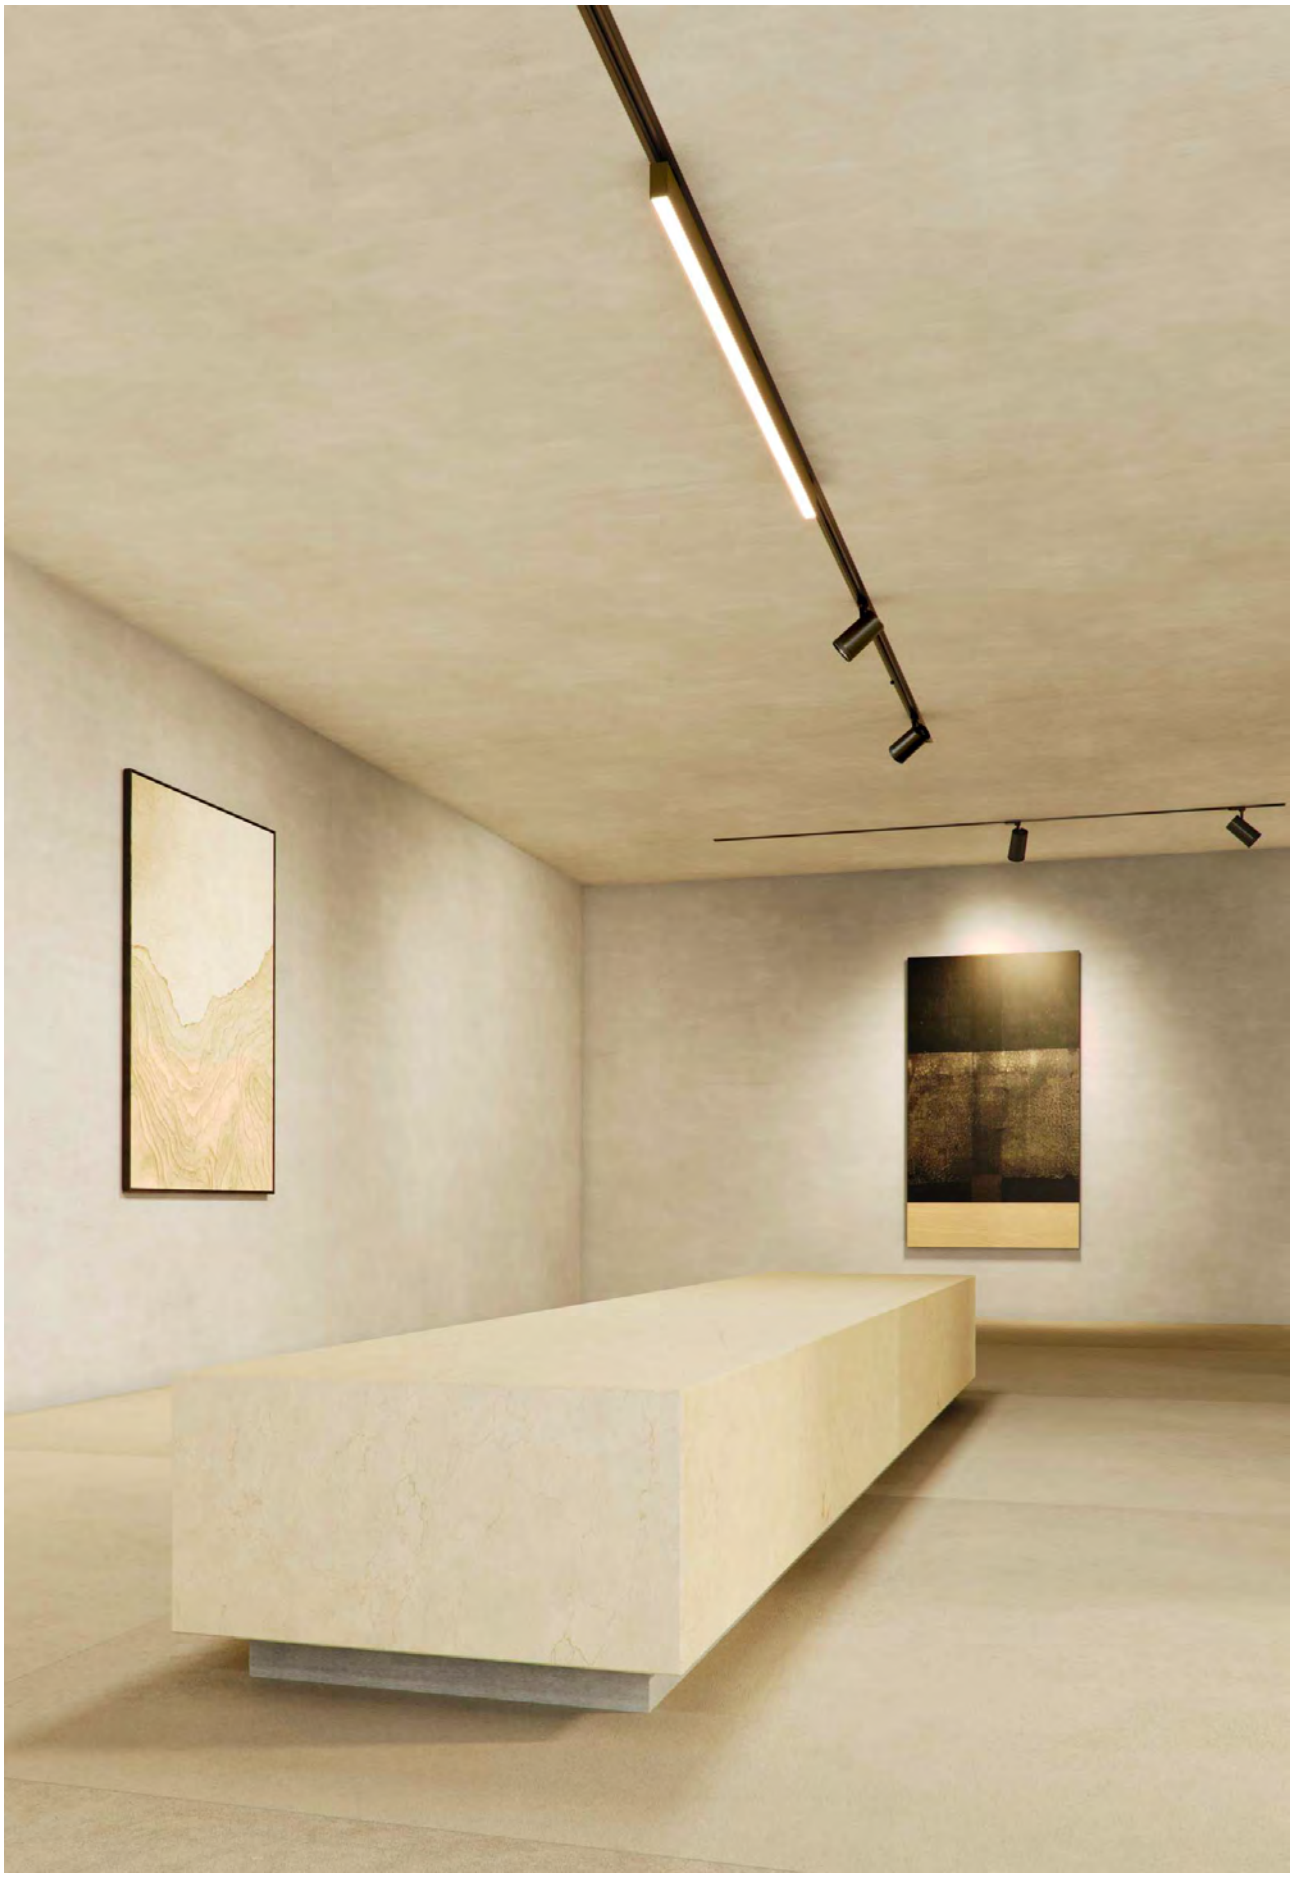


## Time track






Control accessories pages 282-289.

*Finished luminaire.

## Technical Information

| | |
|---|---|
| Power | 15W / 23W / 31W |
| Lumens | 1.680 lm - 4.216 lm |
| Installation | Three Phase Track |
| Material | Aluminium |
| PCB | Rigid |

| Code | |
|---|---|
| Code | 8 |

| Diffuser (Angle) | |
|---|---|
| UGR (81°) | 3 |
| Opal (112°) | 5 |

| Size | |
|---|---|
| 570mm | 4 |
| 840mm | 6 |
| 1.130mm | 8 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (112 lm/W) - 27W/m | 2 |
| 3.000K (128 lm/W) - 27W/m | 3 |
| 4.000K (136 lm/W) - 27W/m | 4 |
| 5.000K (136 lm/W) - 27W/m | 5 |

| Driver | |
|---|---|
| On / Off | 4 |
| Casambi | 6 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |
| Electrolytic Plating | |

Code: 8

CE RoHS

Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95





Arce Pharmacy, A Coruña (Spain). Design: Sabina Arquitectos. Lighting Design: Pérez Antolín. Photography: Paco Rocha.


New


## Kubo






Equipment



Control accessories pages 282-289.

*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 31W / 38W / 46W / 54W |
| Lumens | 3.100 lm - 6.264 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid / RGB-W Flex |

| Code | |
|---|---|
| Code | 7 |

| Diffuser (Angle) | |
|---|---|
| Opal (100°) | 5 |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.410mm | 4 |
| 1.690mm | 5 |
| 1.970mm | 6 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (100 lm/W) - 27W/m | 2 |
| 3.000K (105 lm/W) - 27W/m | 3 |
| 4.000K (111 lm/W) - 27W/m | 4 |
| 5.000K (116 lm/W) - 27W/m | 5 |
| RGB-W (100 lm/W) - 20W/m | 8 |
| 2.700-5.500K (105 lm/W) - 40W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| ⓘ Custom RAL | C |
| ⓘ Electrolytic Plating | |

Code: 7 5


CE RoHS EMC


ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI


## Kubo E












Control accessories pages 282-289.

*Finished luminaire. Includes driver, spring clips, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 31W / 38W / 46W / 54W |
| Lumen | 3.100 lm - 6.264 lm |
| Installation | Recessed |
| Material | Aluminium |
| PCB | Rigid / RGB-W Flex |

| Code | |
|---|---|
| Code | 5 |

| Diffuser (Angle) | |
|---|---|
| Opal (100°) | 5 |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.410mm | 4 |
| 1.690mm | 5 |
| 1.970mm | 6 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (100 lm/W) - 27W/m | 2 |
| 3.000K (105 lm/W) - 27W/m | 3 |
| 4.000K (111 lm/W) - 27W/m | 4 |
| 5.000K (116 lm/W) - 27W/m | 5 |
| RGB-W (100 lm/W) - 20W/m | 8 |
| 2.700-5.500K (105 lm/W) - 40W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: 5 5

CE RoHS

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | tuya | PUSH | DALI




Dental Clinic Eva Flores, El Prat de LLobregat (Spain). Design: Meumstudio.




New

## Mirrow






600x600mm



600x1.050mm

Equipment

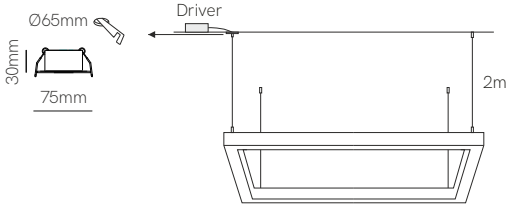


Control accessories pages 282-289.

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 85W / 94W |
| Lumens | 8.500 lm - 10.434 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid / RGB-W Flex |

| Code | | Diffuser | | Size | |
|---|---|---|---|---|---|
| Code | 7 | Opal | 8 | 600x600mm | 2 |
| | | | | 600x1.050mm | 9 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (100 lm/W) - 25W/m | 2 |
| 3.000K (105 lm/W) - 25W/m | 3 |
| 4.000K (111 lm/W) - 25W/m | 4 |
| RGB-W (100 lm/W) - 20W/m | 8 |
| 2.700-5.500K (105 lm/W) - 22W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| ⓘ Custom RAL | C |
| ⓘ Electrolytic Plating | |

Code: 7 8

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | PUSH | DALI 2



New


## Tax





600x600x600mm / 840x840x840mm

Equipment

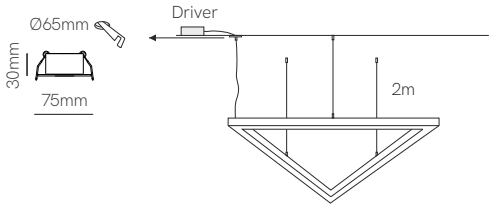


Control accessories pages 282-289.

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 52W / 64W |
| Lumens | 5.200 lm - 7.104 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid / RGB-W Flex |

| Code | | Diffuser | | Size | |
|---|---|---|---|---|---|
| Code | 7 | Opal | 2 | 600mm | 4 |
| | | | | 840mm | 8 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (100 lm/W) - 25W/m | 2 |
| 3.000K (105 lm/W) - 25W/m | 3 |
| 4.000K (111 lm/W) - 25W/m | 4 |
| RGB-W (100 lm/W) - 20W/m | 8 |
| 2.700-5.500K (105 lm/W) - 22W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| ⓘ Custom RAL | C |
| ⓘ Electrolytic Plating | |

Code: 7 2

CE RoHS EMC

ⓘ Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | tuya | PUSH | DALI 2



## Filter






### Equipment

Ø75x300mm



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 32W - 120W |
| Lumens | 3.200 lm - 13.320 lm |
| Installation | Pendant |
| Material | Aluminium |
| Material | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 3 | Opal (360°) | 7 | 800mm | 3 | 2.700K (100 lm/W) - 40W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.200mm | 5 | 3.000K (105 lm/W) - 40W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.600mm | 7 | 4.000K (111 lm/W) - 40W/m | 4 | Push | 3 | Custom RAL | C |
| | | | | 2.000mm | 9 | RGB (58 lm/W) - 60W/m | 7 | Casambi | 5 | | |
| | | | | | | | | Tuya | 7 | | |

Code: 3 7

CE RoHS EAC

Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB only works with driver 5 Casambi and 7 Tuya.

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2




## Tubi






Equipment




Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps (aluminium).

## Technical Information

| | |
|---|---|
| Power | 35W / 44W / 53W / 62W |
| Lumens | 3.500 lm - 8.432 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | |
|---|---|
| Code | 7 |

| Diffuser (Angle) | |
|---|---|
| Opal (270°) | 1 |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.410mm | 4 |
| 1.690mm | 5 |
| 1.970mm | 6 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (100 lm/W) - 31W/m | 2 |
| 3.000K (128 lm/W) - 31W/m | 3 |
| 4.000K (136 lm/W) - 31W/m | 4 |
| 5.000K (136 lm/W) - 31W/m | 5 |
| RGB-W (100 lm/W) - 31W/m | 8 |
| 2.700-5.500K (105 lm/W) - 31W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: 7 1

CE RoHS EAC

Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | tuya | PUSH | DALI 2



New

## Tubi wall



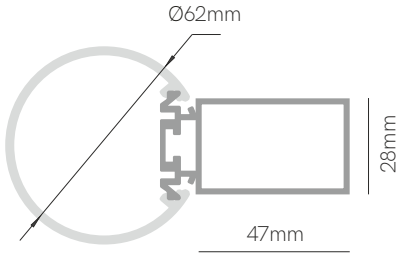


Control accessories pages 282-289.

*Finished luminaire. Includes base wall and end caps (aluminium).

### Technical Information

| | |
|---|---|
| Power | 35W / 44W / 53W |
| Lumens | 3.500 lm - 5.883 lm |
| Installation | Wall |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 7 | Opal (270°) | 9 | 1.130mm | 3 | 2.700K (100 lm/W) - 31W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.410mm | 4 | 3.000K (105 lm/W) - 31W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (111 lm/W) - 31W/m | 4 | Push | 3 | Custom RAL | C |
| | | | | | | RGB-W (100 lm/W) - 31W/m | 8 | Casambi | 5 | | |
| | | | | | | 2.700-5.500K (105 lm/W) - 31W/m | 9 | Tuya | 7 | | |

Code: 7 9

CE RoHS EAC

Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | PUSH | DALI 2


M-AUDIO

## Grip




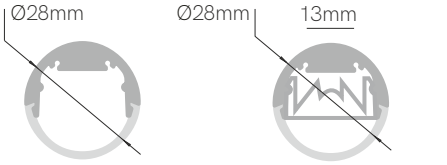


Opal

Angle 30° / Transparent

### Equipment




Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 26W / 33W / 39W / 46W |
| Lumens | 2.522 lm - 4.968 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 2 | Opal | 4 | 1.130mm | 3 | 2.700K (97 lm/W) - 22W/m | 2 | On / Off | 1 | Black (9005) | 2 |
| | | 30°/ Transparent | 8 | 1.410mm | 4 | 3.000K (103 lm/W) - 22W/m | 3 | Dali | 2 | Custom RAL | C |
| | | | | 1.690mm | 5 | 4.000K (108 lm/W) - 22W/m | 4 | Push | 3 | | |
| | | | | 1.970mm | 6 | RGB (100 lm/W) - 20W/m | 8 | Casambi | 5 | | |
| | | | | | | 2.700-5.500K (105 lm/W) - 20W/m | 9 | Tuya | 7 | | |

Code: 2 _ _ _ _ 2

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2


DentalLove


New

## Nyneto






### Equipment




Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 16W / 20W / 24W / 28W |
| Lumens | 896 lm - 1.848 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex |

| Code | | Diffuser | |
|---|---|---|---|
| Code | 8 | Opal | 8 |

| Size | |
|---|---|
| 1.120mm | 3 |
| 1.410mm | 4 |
| 1.690mm | 5 |
| 1.970mm | 6 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (56 lm/W) - 15W/m | 2 |
| 3.000K (61 lm/W) - 15W/m | 3 |
| 4.000K (66 lm/W) - 15W/m | 4 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |


| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: 8 8

CE RoHS EMC

Consult delivery terms and conditions.
*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 1,97m Max | tuya | PUSH | DALI 2

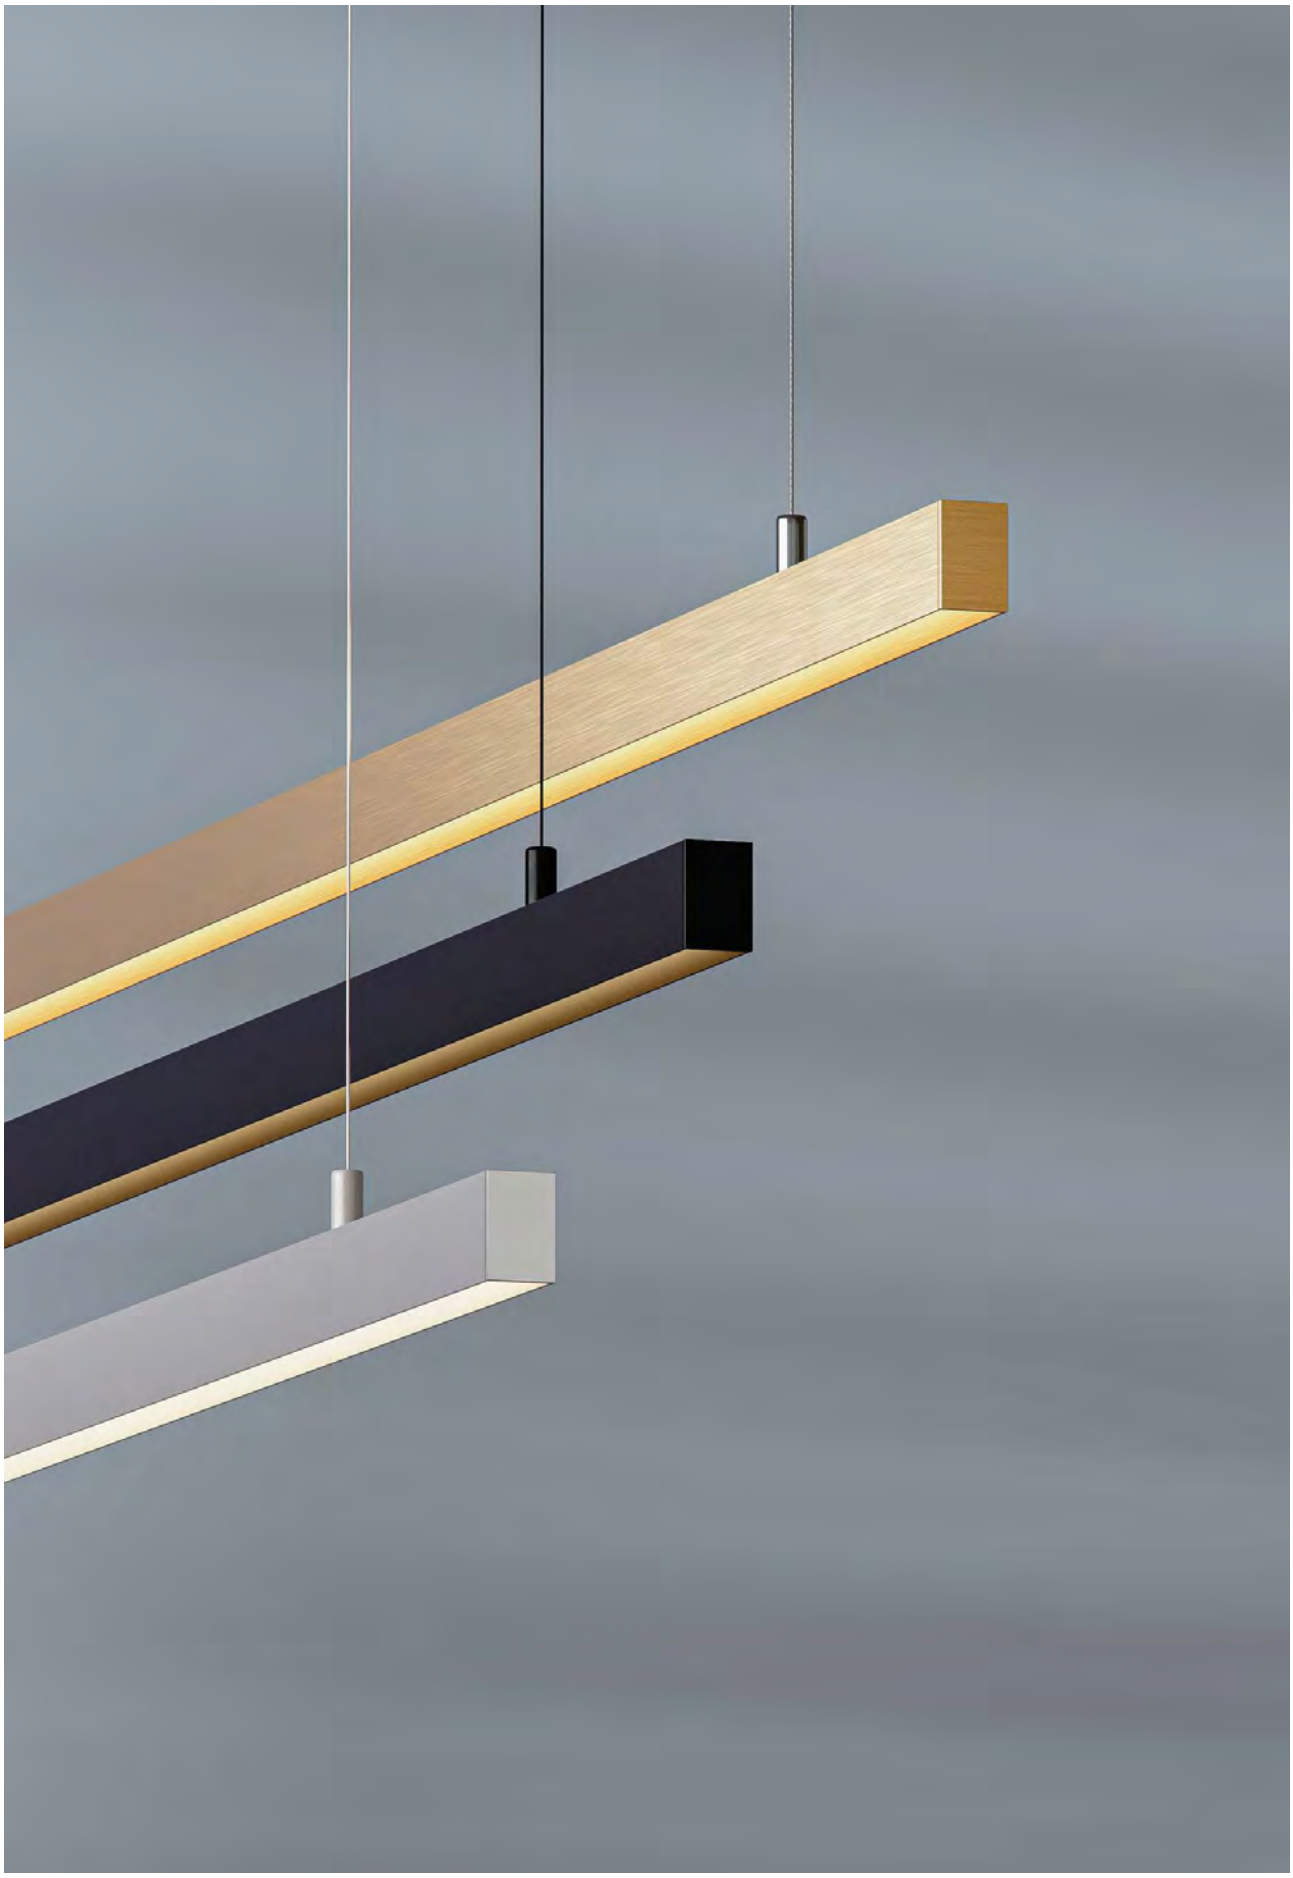


New

## Minimus






Equipment

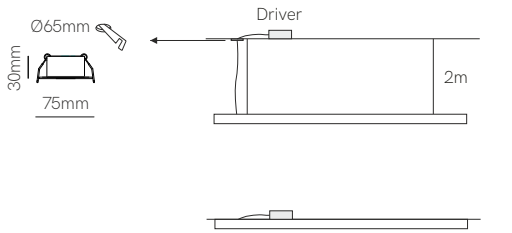


Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 25W / 31W / 37W / 43W |
| Lumens | 2.425 lm - 4.644 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 5 | Opal prism (100°) | 8 | 1.170mm | 2 | 2.700K (97 lm/W) - 22W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.420mm | 4 | 3.000K (103 lm/W) - 22W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.720mm | 6 | 4.000K (108 lm/W) - 22W/m | 4 | Push | 3 | Custom RAL | C |
| | | | | 1.970mm | 8 | | | Casambi | 5 | | |
| | | | | | | | | Tuya | 7 | | |

Code: 5 8

CE RoHS EAC


Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 1,97m Max | tuya | PUSH | DALI 2



▶ VIDEO


## Dau






### Equipment



Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 18W / 23W / 26W / 30W |
| Lumens | 1.800 lm - 3.420 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Flex |

| Code | |
|---|---|
| Code | 1 |

| Diffuser (Angle) | |
|---|---|
| Opal (110°) | 5 |

| Size | |
|---|---|
| 1.170mm | 3 |
| 1.420mm | 4 |
| 1.720mm | 5 |
| 1.970mm | 6 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (100 lm/W) - 15W/m | 2 |
| 3.000K (105 lm/W) - 15W/m | 3 |
| 4.000K (111 lm/W) - 15W/m | 4 |
| 5.000K (114 lm/W) - 15W/m | 5 |
| RGB-W (100 lm/W) - 20W/m | 8 |
| 2.700-5.500K (105 lm/W) - 20W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: 1 5


CE RoHS EAC

ⓘ Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2

## Dau E






Control accessories pages 282-289.

*Finished luminaire. Includes power supply, spring clips, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 18W / 23W / 26W / 30W |
| Lumens | 1.800 lm - 3.420 lm |
| Installation | Recessed |
| Material | Aluminium |
| PCB | Flex |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | Opal (110°) | 6 | 1.170mm | 3 | 2.700K (100 lm/W) - 15W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.420mm | 4 | 3.000K (105 lm/W) - 15W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.720mm | 5 | 4.000K (111 lm/W) - 15W/m | 4 | Push | 3 | Custom RAL | C |
| | | | | 1.970mm | 6 | 5.000K (114 lm/W) - 15W/m | 5 | Casambi | 5 | | |
| | | | | | | RGB-W (100 lm/W) - 20W/m | 8 | Tuya | 7 | | |
| | | | | | | 2.700-5.500K (105 lm/W) - 20W/m | 9 | | | | |

Code: 1 6

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | PUSH | DALI 2







## Square




Equipment



530 x 530mm



530 x 1.030mm




Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 43W / 62W |
| Lumens | 4.300 lm - 6.882 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex |

| Code | | Diffuser (Angle) | | Size | |
|---|---|---|---|---|---|
| Code | 3 | Opal (110°) | 3 | 530 x 530mm | 4 |
| | | | | 530 x 1.030mm | 8 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (100 lm/W) - 20W/m | 2 |
| 3.000K (105 lm/W) - 20W/m | 3 |
| 4.000K (111 lm/W) - 20W/m | 4 |
| RGB-W (100 lm/W) - 20W/m | 8 |
| 2.700-5.500K (105 lm/W) - 20W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Matt Gold | 4 |
| Silver | 5 |
| Custom RAL | C |

Code: 3 3

CE RoHS

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2




New

## Zero in






Equipment




Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 26W / 44W / 63W / 96W |
| Lumens | 1.560 lm - 6.912 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex |

| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | Opal | 2 | 400mm | 2 | 2.700K (60 lm/W) - 22W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 700mm | 4 | 3.000K (66 lm/W) - 22W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.000mm | 6 | 4.000K (72 lm/W) - 22W/m | 4 | Push | 3 | ⓘ Matt Gold | 4 |
| | | | | ⓘ 1.400mm | 8 | RGB-W (50 lm/W) - 22W/m | 8 | Casambi | 5 | ⓘ Silver | 5 |
| | | | | | | 2.700-5.500K (70 lm/W) - 22W/m | 9 | Tuya | 7 | ⓘ Custom RAL | C |

Code: 1 2

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2



New

## Circus



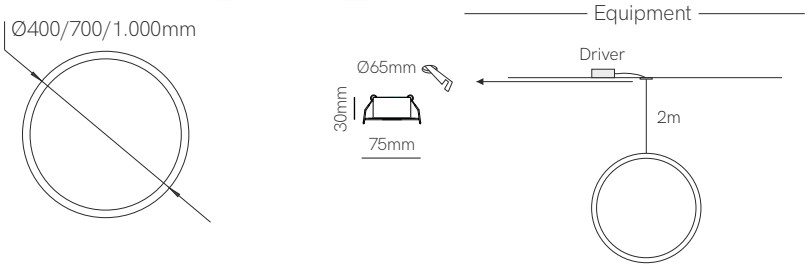


Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 26W / 44W / 63W |
| Lumens | 1.560 lm - 4.536 lm |
| Installation | Pendant |
| Material | Aluminium |
| Material | Flex |

| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | Opal | 0 | 400mm | 2 | 2.700K (60 lm/W) - 22W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 700mm | 4 | 3.000K (66 lm/W) - 22W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.000mm | 6 | 4.000K (72 lm/W) - 22W/m | 4 | Push | 3 | ⓘ Matt Gold | 4 |
| | | | | | | RGB-W (50 lm/W) - 22W/m | 8 | Casambi | 5 | ⓘ Silver | 5 |
| | | | | | | 2.700-5.500K (70 lm/W) - 22W/m | 9 | Tuya | 7 | ⓘ Custom RAL | C |
| | | | | | | | | | | ⓘ Electrolytic Plating | |

Code: 1 0

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2






Electrolytic Plating satin copper
On demand

New

## Tundra





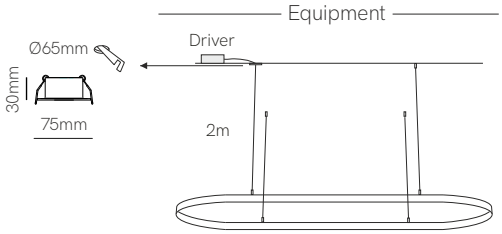
Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.

### Technical Information

| | |
|---|---|
| Power | 56W / 81W |
| Lumens | 3.360 lm - 5.832 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex |

| Code | | Diffuser | | Size | |
|---|---|---|---|---|---|
| Code | 8 | Opal | 6 | 500 x 1.000mm | 4 |
| | | | | 700 x 1.400mm | 6 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (60 lm/W) - 22W/m | 2 |
| 3.000K (66 lm/W) - 22W/m | 3 |
| 4.000K (72 lm/W) - 22W/m | 4 |
| RGB-W (50 lm/W) - 22W/m | 8 |
| 2.700-5.500K (70 lm/W) - 22W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| ⓘ Matt Gold | 4 |
| ⓘ Silver | 5 |
| ⓘ Custom RAL | C |
| ⓘ Electrolytic Plating | |

Code: 8 6

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2




New

## Zero out






Equipment




Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 26W / 44W / 63W / 96W |
| Lumens | 1.560 lm - 6.912 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex |

| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | Opal | 4 | 400mm | 2 | 2.700K (60 lm/W) - 22W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 700mm | 4 | 3.000K (66 lm/W) - 22W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.000mm | 6 | 4.000K (72 lm/W) - 22W/m | 4 | Push | 3 | ⓘ Matt Gold | 4 |
| | | | | ⓘ 1.400mm | 8 | RGB-W (50 lm/W) - 22W/m | 8 | Casambi | 5 | ⓘ Silver | 5 |
| | | | | | | 2.700-5.500K (70 lm/W) - 22W/m | 9 | Tuya | 7 | ⓘ Custom RAL | C |

Code: 1 4

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2



New

## Zero XL



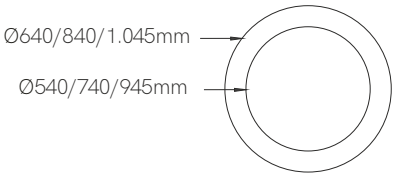


Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.

### Technical Information

| | |
|---|---|
| Power | 78W / 105W / 131W |
| Lumens | 5.850 lm - 10.349 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | Opal | 3 | 640mm | 2 | 3.000K (75 lm/W) - 39W/m | 3 | On / Off | 1 | White (9003) | 1 |
| | | | | 840mm | 5 | 4.000K (79 lm/W) - 39W/m | 4 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.045mm | 6 | | | Push | 3 | Gray (9006) | 3 |
| | | | | | | | | Casambi | 5 | | |

Code: 1 3

CE RoHS EMC

*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2









Grand Cafe Lust, Nijkerk (The Netherlands). Design: MoreSenz Albert van den Akker.

## Zero direct

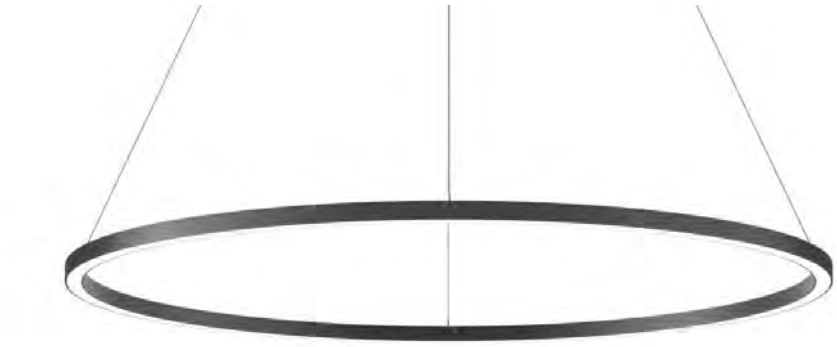


Ø520/800/1.200/1.500/3.000mm




Equipment

Ø250/280x41mm




Ø520/800/1.200/1.500mm

Ø80x29mm




Ø3.000mm

Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 35W / 55W /75W / 94W / 189W |
| Lumens | 2.100 lm - 14.742 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex |

| Code | | Diffuser | |
|---|---|---|---|
| Code | 1 | Opal | 7 |

| Size | |
|---|---|
| 520mm | 0 |
| 800mm | 2 |
| 1.200mm | 6 |
| 1.500mm | 8 |
| 3.000mm | 9 |
| Custom | C |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (66 lm/W) - 22W/m | 2 |
| 3.000K (72 lm/W) - 22W/m | 3 |
| 4.000K (78 lm/W) - 22W/m | 4 |
| 2.700-5.500K (70 lm/W) - 22W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| ⓘ Matt Gold | 4 |
| ⓘ Silver | 5 |
| ⓘ Custom RAL | C |
| ⓘ Electrolytic Plating | |


Code: 1 7

CE RoHS EMC


ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2

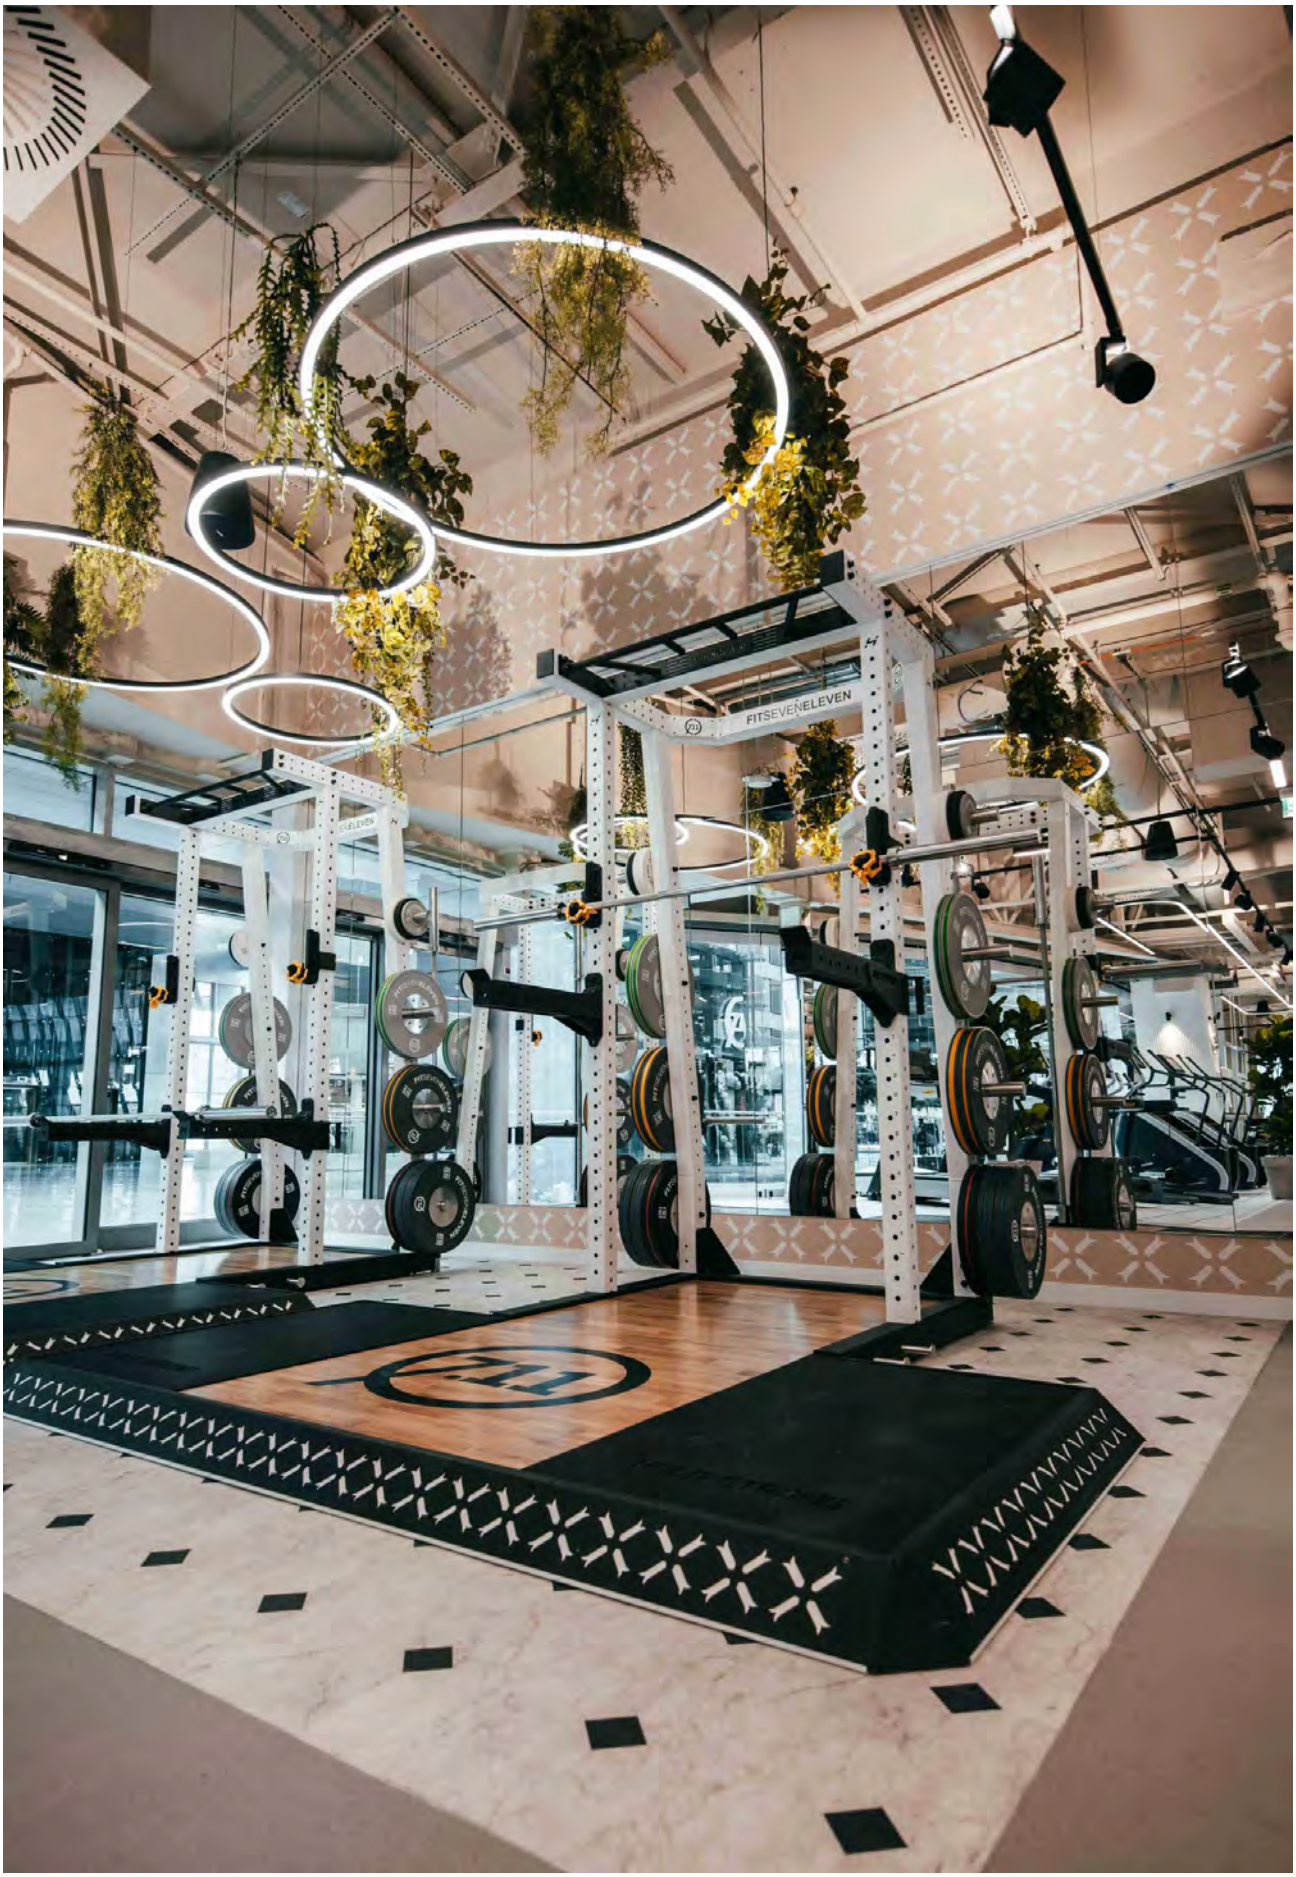


FITSEVENELEVEN®, Club Frankfurt Airport.

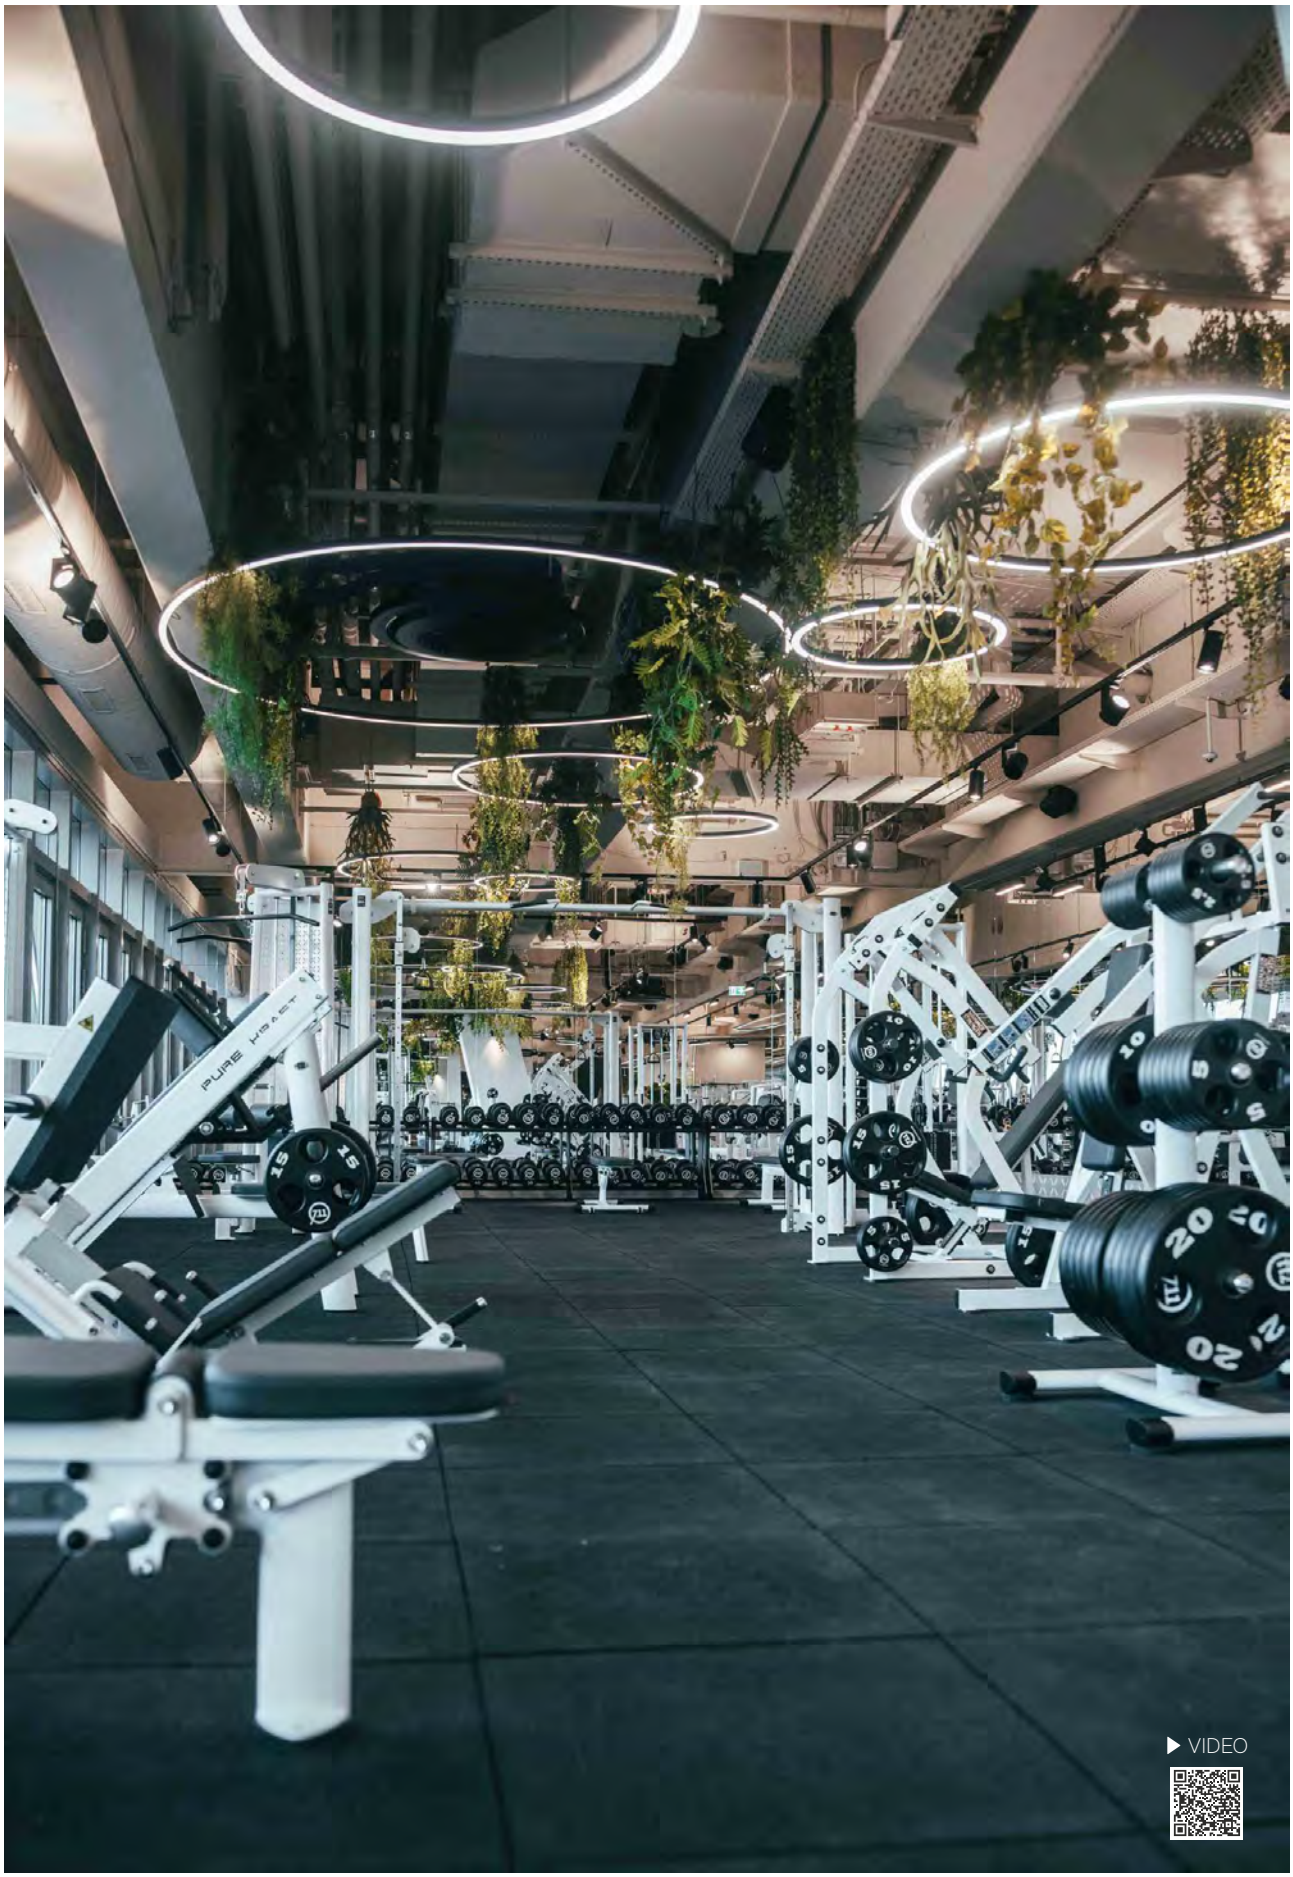



FITSEVENELEVEN®, Club Frankfurt Airport.

# Zero Design

## Zero 45°

| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Voltage | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | Z | Opal | 1 | 800mm | 1 | 2.700K (66 lm/w) - 22W/m | 2 | 24VDC | 0 | White (9003) | 1 |
| | | | | 1.500mm | 4 | 3.000K (72 lm/w) - 22W/m | 3 | | | Black (9005) | 2 |
| | | | | 3.000mm | 7 | 4.000K (78 lm/w) - 22W/m | 4 | | | ⓘ Matt Gold | 4 |
| | | | | | | CCT (70 lm/w) - 22W/m | 9 | | | ⓘ Silver | 5 |
| | | | | | | | | | | ⓘ Custom RAL | C |
| | | | | | | | | | | ⓘ Electrolytic Plating | |

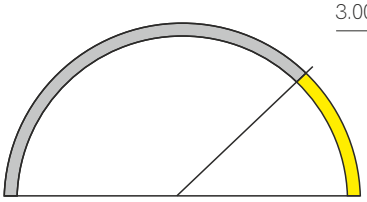


900 - 1.500 - 3.000mm

Code: Z 1 0

## Zero 90°

| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Voltage | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | Z | Opal | 1 | 800mm | 2 | 2.700K (66 lm/w) - 22W/m | 2 | 24VDC | 0 | White (9003) | 1 |
| | | | | 1.500mm | 5 | 3.000K (72 lm/w) - 22W/m | 3 | | | Black (9005) | 2 |
| | | | | | | 4.000K (78 lm/w) - 22W/m | 4 | | | ⓘ Matt Gold | 4 |
| | | | | | | CCT (70 lm/w) - 22W/m | 9 | | | ⓘ Silver | 5 |
| | | | | | | | | | | ⓘ Custom RAL | C |
| | | | | | | | | | | ⓘ Electrolytic Plating | |

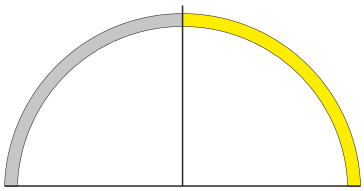


900 - 1.500mm

Code: Z 1 0

## Zero 90°

| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Voltage | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | Z | Opal | 1 | Extern (1.500mm) | 3 | 2.700K (66 lm/w) - 22W/m | 2 | 24VDC | 0 | White (9003) | 1 |
| | | | | Intern (1.500mm) | 6 | 3.000K (72 lm/w) - 22W/m | 3 | | | Black (9005) | 2 |
| | | | | | | 4.000K (78 lm/w) - 22W/m | 4 | | | ⓘ Matt Gold | 4 |
| | | | | | | CCT (70 lm/w) - 22W/m | 9 | | | ⓘ Silver | 5 |
| | | | | | | | | | | ⓘ Custom RAL | C |
| | | | | | | | | | | ⓘ Electrolytic Plating | |

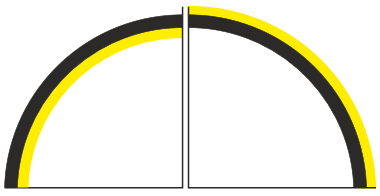

1.500mm

Code: Z 1 0

CE RoHS EMC

Control accessories pages 282-289.


ⓘ Consult delivery terms and conditions.

*Create your luminaire acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | CRI ≥80 | 160 LED/m | 24 VDC

## Zero 180°

| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Voltage | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | Z | Opal | 1 | 800mm | 8 | 2.700K (66 lm/w) - 22W/m | 2 | 24VDC | 0 | White (9003) | 1 |
| | | | | 1.500mm | 9 | 3.000K (72 lm/w) - 22W/m | 3 | | | Black (9005) | 2 |
| | | | | | | 4.000K (78 lm/w) - 22W/m | 4 | | | ⓘ Matt Gold | 4 |
| | | | | | | CCT (70 lm/w) - 22W/m | 9 | | | ⓘ Silver | 5 |
| | | | | | | | | | | ⓘ Custom RAL | C |
| | | | | | | | | | | ⓘ Electrolytic Plating | |

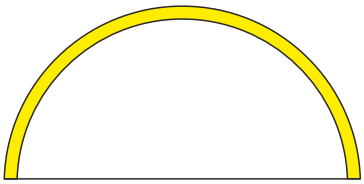

900 - 1.500mm

Code: Z 1 0


## Zero line

| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Voltage | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | Z | Opal | 1 | 2.500mm | 0 | 2.700K (66 lm/w) - 22W/m | 2 | 24VDC | 0 | White (9003) | 1 |
| | | | | | | 3.000K (72 lm/w) - 22W/m | 3 | | | Black (9005) | 2 |
| | | | | | | 4.000K (78 lm/w) - 22W/m | 4 | | | ⓘ Matt Gold | 4 |
| | | | | | | CCT (70 lm/w) - 22W/m | 9 | | | ⓘ Silver | 5 |
| | | | | | | | | | | ⓘ Custom RAL | C |
| | | | | | | | | | | ⓘ Electrolytic Plating | |



2.500mm

Code: Z 1 0




ⓘ On demand.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver Casambi and Tuya.. Accessories on page 158-159.

## Accessories



End Cap
- 40631
- 40632
- 40634
- 40635



Suspension Kit Metallic (m)
- 34720
- 34721
- 34722



Ceiling suspension
- 40430



Kit Joint Metallic
- 40490
- 40491
- 40492


Control accessories pages 282-289.

ⓘ Consult delivery terms and conditions.

*Create your luminaire acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 20 | CRI ≥80 | 160 LED/m | 24 VDC



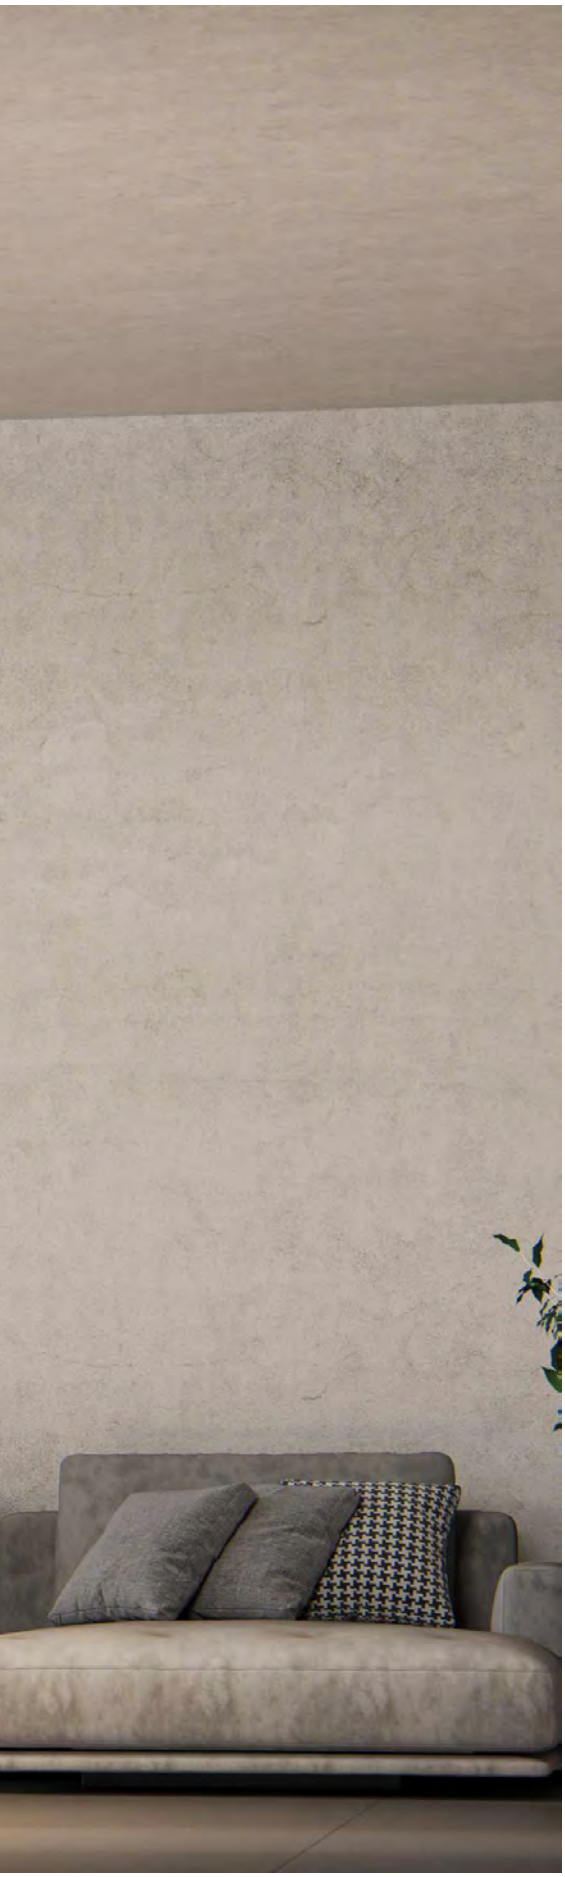





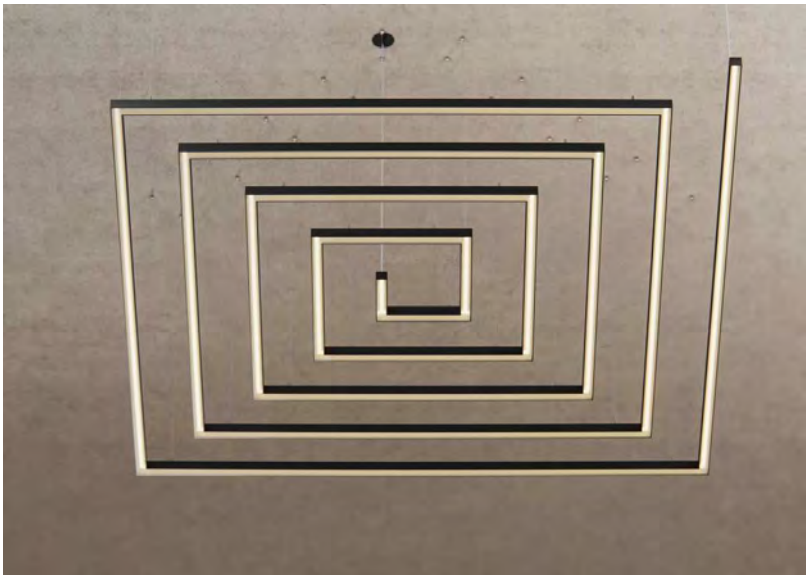



KINETIC TECH






## Zero dual







### Equipment




Ø1.050/1.535mm




Ø3.035mm

Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 107W / 162W / 325W |
| Lumens | 5.457 lm - 17.225 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex |

| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | Opal | 8 | 1.050mm | 3 | 3.000K (55 lm/W) - 20W/m | 3 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.550mm | 8 | 4.000K (58 lm/W) - 20W/m | 4 | Dali | 2 | Black (9005) | 2 |
| | | | | 3.050mm | 9 | | | Push | 3 | Custom RAL | C |
| | | | | | | | | Casambi | 5 | | |
| | | | | | | | | Tuya | 7 | | |

Code: 1 8

CE RoHS

Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2

Kaa







Kaa line







New

## Kaa



Equipment




Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 90W / 180W / 300W |
| Lumens | 5.400 lm - 21.900 lm |
| Installation | Pendant |
| Material | Aluminium and silicone |

| Code | |
|---|---|
| Code | 76 |

| Size (Led) | |
|---|---|
| 3 x 1.500mm ⓘ | 1 |
| 3 x 3.000mm ⓘ | 3 |
| 3 x 5.000mm ⓘ | 5 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.400K (60 lm/W) - 20W/m | 1 |
| 2.700K (65 lm/W) - 20W/m | 2 |
| 3.000K (69 lm/W) - 20W/m | 3 |
| 4.000K (73 lm/W) - 20W/m | 4 |
| RGB-W (41 lm/W) - 20W/m | 7 |
| 2.700-5.500K (70 lm/W) - 20W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| ⓘ Custom RAL | C |

Code: 7 6

### ⓘ Included accessories

Suspension kit  1 x 3 / 3 x 6 / 5 x 9 + Clip  1 x 3 / 3 x 6 / 5 x 9

CE RoHS

ⓘ Consult delivery terms and conditions.


*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 2,5m Max | tuya | PUSH | DALI




New

## Kaa line

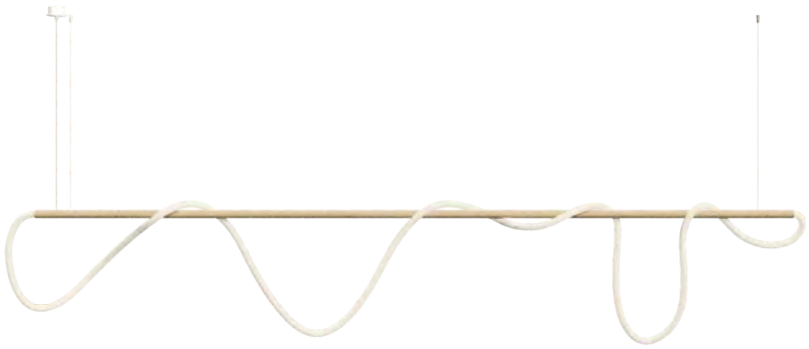

Equipment

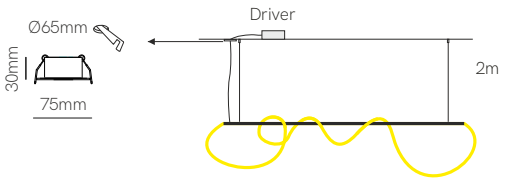


Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power.

## Technical Information

| | |
|---|---|
| Power | 30W / 60W / 100W |
| Lumens | 1.800 lm - 7.300 lm |
| Installation | Pendant |
| Material | Aluminium and silicone |

| Code | |
|---|---|
| Code | 74 |

| Size (Stick + Led) | |
|---|---|
| 1.000 + 1.500mm | 1 |
| 1.600 + 3.000mm | 3 |
| 2.500 + 5.000mm | 5 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.400K (60 lm/W) - 20W/m | 1 |
| 2.700K (65 lm/W) - 20W/m | 2 |
| 3.000K (69 lm/W) - 20W/m | 3 |
| 4.000K (73 lm/W) - 20W/m | 4 |
| RGB-W (41 lm/W) - 20W/m | 7 |
| 2.700-5.500K (70 lm/W) - 20W/m | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour (stick) | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Matt Gold | 3 |
| ⓘ Custom RAL | C |
| ⓘ Electrolytic Plating | |

Code: 7 4

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 2,5m Max | tuya | PUSH | DALI




New


## Horizon



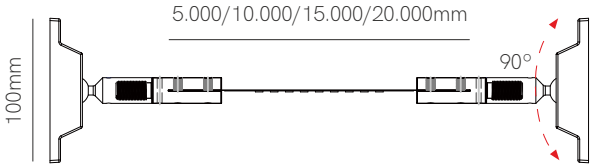


Equipment

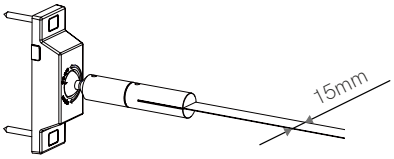


*Led strip and power supply included.

## Technical Information

| | |
|---|---|
| Max. power | 62W / 75W / 94W / 189W |
| Lumens | 5.890 lm - 18.900 lm |
| Installation | Pendant |
| Material | Aluminium |
| Material | Flex |

| Code | | Led | | Size (Led) | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 2 | 9,6W/m | 5 | 5.000mm | 1 | 2.700K (95 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | 14,4W/m | 7 | 10.000mm | 2 | 3.000K (98 lm/W) | 3 | | | Black (9005) | 2 |
| | | | | 15.000mm | 3 | 4.000K (100 lm/W) | 4 | | | Custom RAL | C |
| | | | | 20.000mm | 4 | | | | | | |

Code: 2 1


CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 24 VDC | PF >0,9 | CRI ≥90 | 20m Max



## Flash






*Finished luminaire. Includes spring clips and end caps.

## Technical Information

| | |
|---|---|
| Power | 16W / 27W / 35W / 46W / 55W |
| Lumens | 1.600 lm - 6.050 lm |
| Installation | Wall |
| Material | Aluminium |
| PCB | Flex |


| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 3 | Opal | 9 | 520mm | 1 | 2.700K (100 lm/W) - 30W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 895mm | 2 | 3.000K (105 lm/W) - 30W/m | 3 | | | Black (9005) | 2 |
| | | | | 1.145mm | 3 | 4.000K (110 lm/W) - 30W/m | 4 | | | Aluminium | 9 |
| | | | | 1.520mm | 5 | 6.000K (110 lm/W) - 30W/m | 6 | | | Custom RAL | C |
| | | | | 1.825mm | 6 | | | | | | |

Code: 3 9 1

CE RoHS EMC


Consult delivery terms and conditions.
*Create your code acording to your preferences.

3 YEARS WARRANTY | 35.000 HOURS | 230 VAC | IP 20 | CRI ≥80 | 2m Max | TRIAC DIMM

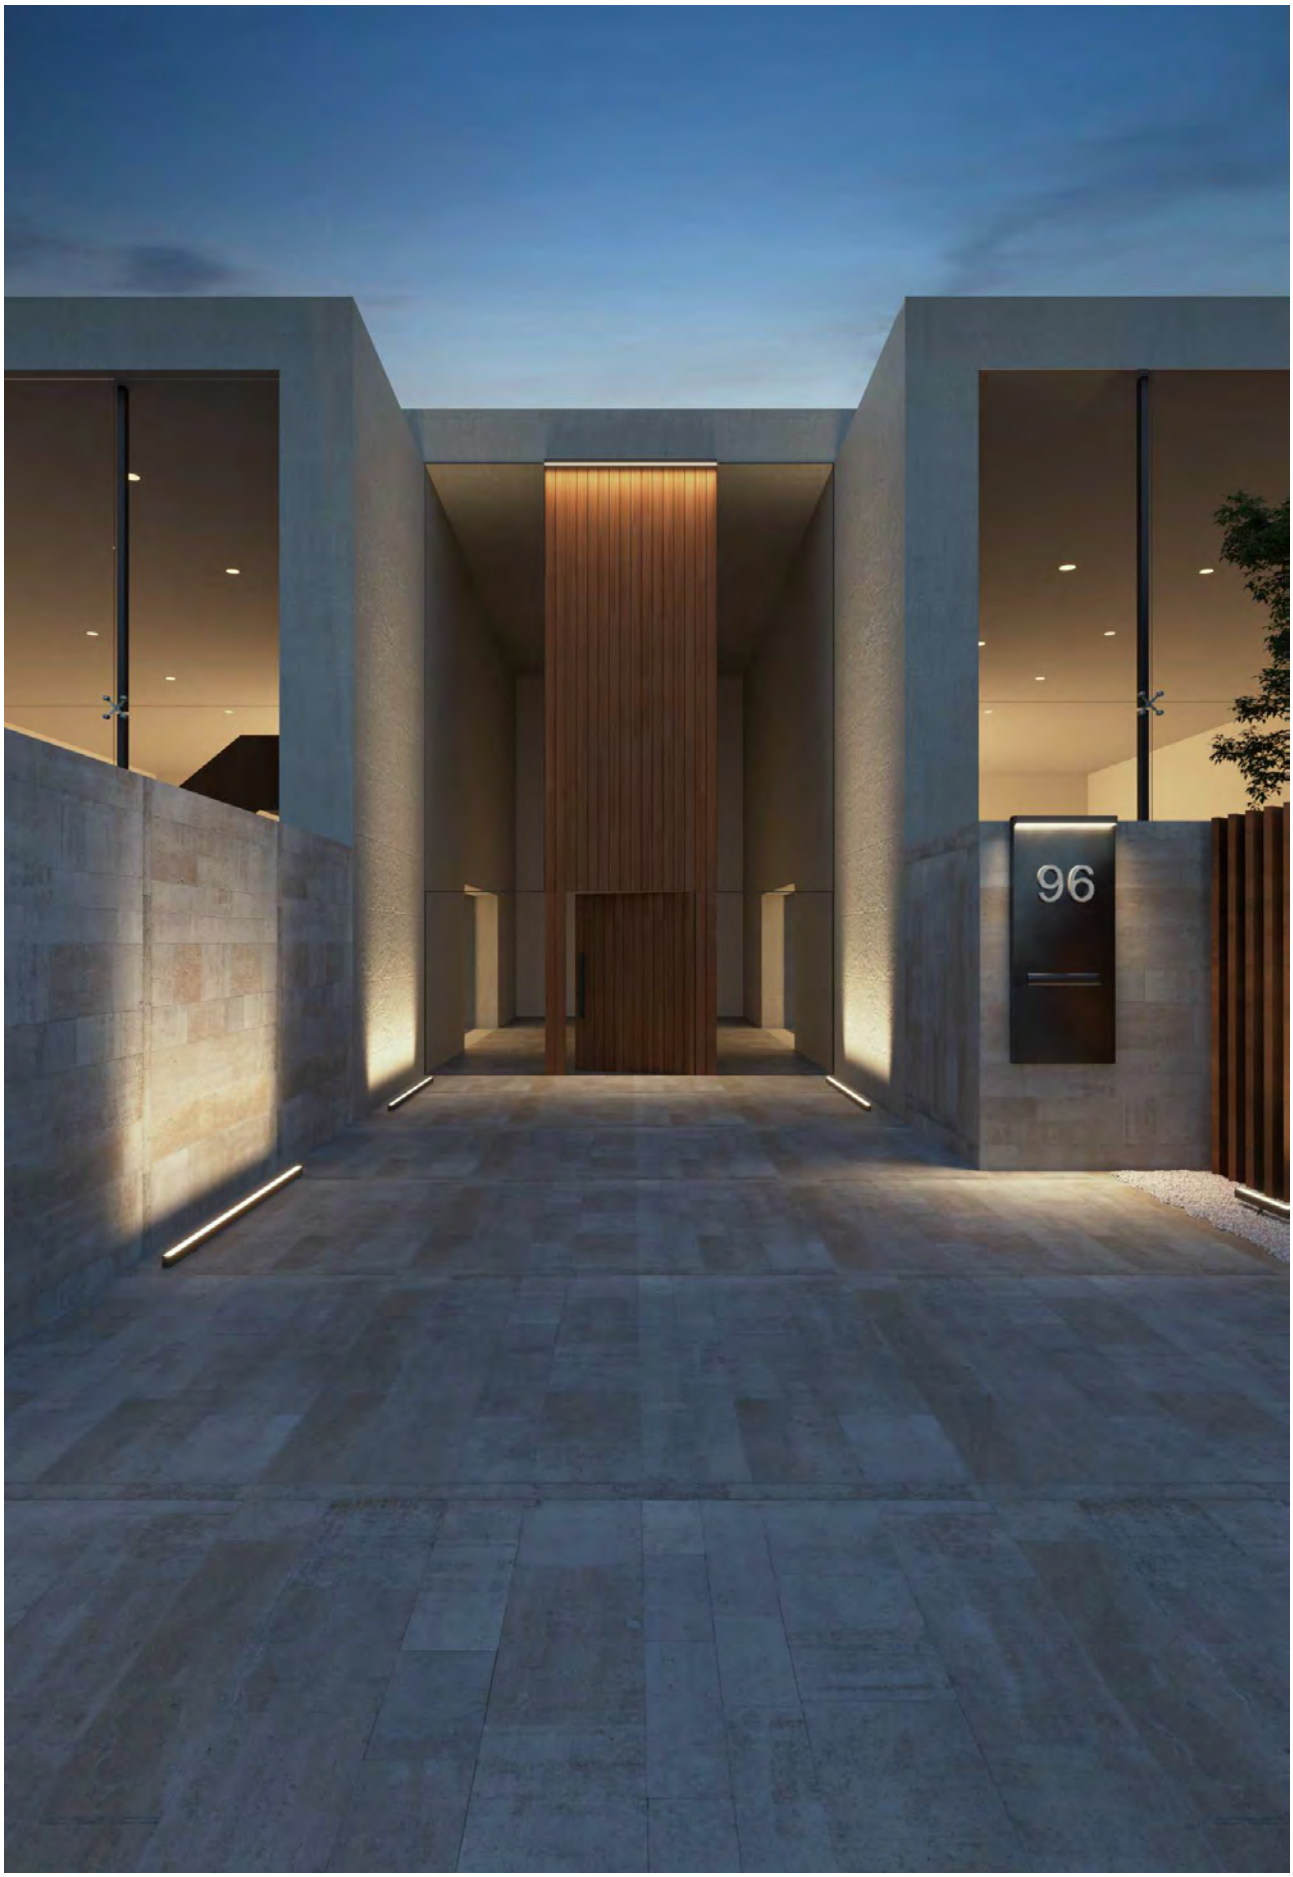
96

## Triton






Installation



Control accessories pages 282-289.

*Finished luminaire. Includes power supply, clip rotable, 2mts power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 21W / 41W / 61W |
| Lumens | 2.625 lm - 8.235 lm |
| Installation | Surface |
| Material | Aluminium |
| PCB | Rigid |


| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4 | Asymmetric (15°/35°) | 9 | 420mm | 1 | 2.700K (125 lm/W) - 50W/m | 2 | On / Off | 1 | Black (9005) | 2 |
| | | | | 820mm | 2 | 3.000K (130 lm/W) - 50W/m | 3 | Dali | 2 | Custom RAL | C |
| | | | | 1.220mm | 3 | 4.000K (135 lm/W) - 50W/m | 4 | | | | |

Code: 4 9 _ _ _ 2

CE RoHS EMC

Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 230 VAC | PF >0,9 | CRI ≥80 | DALI 2

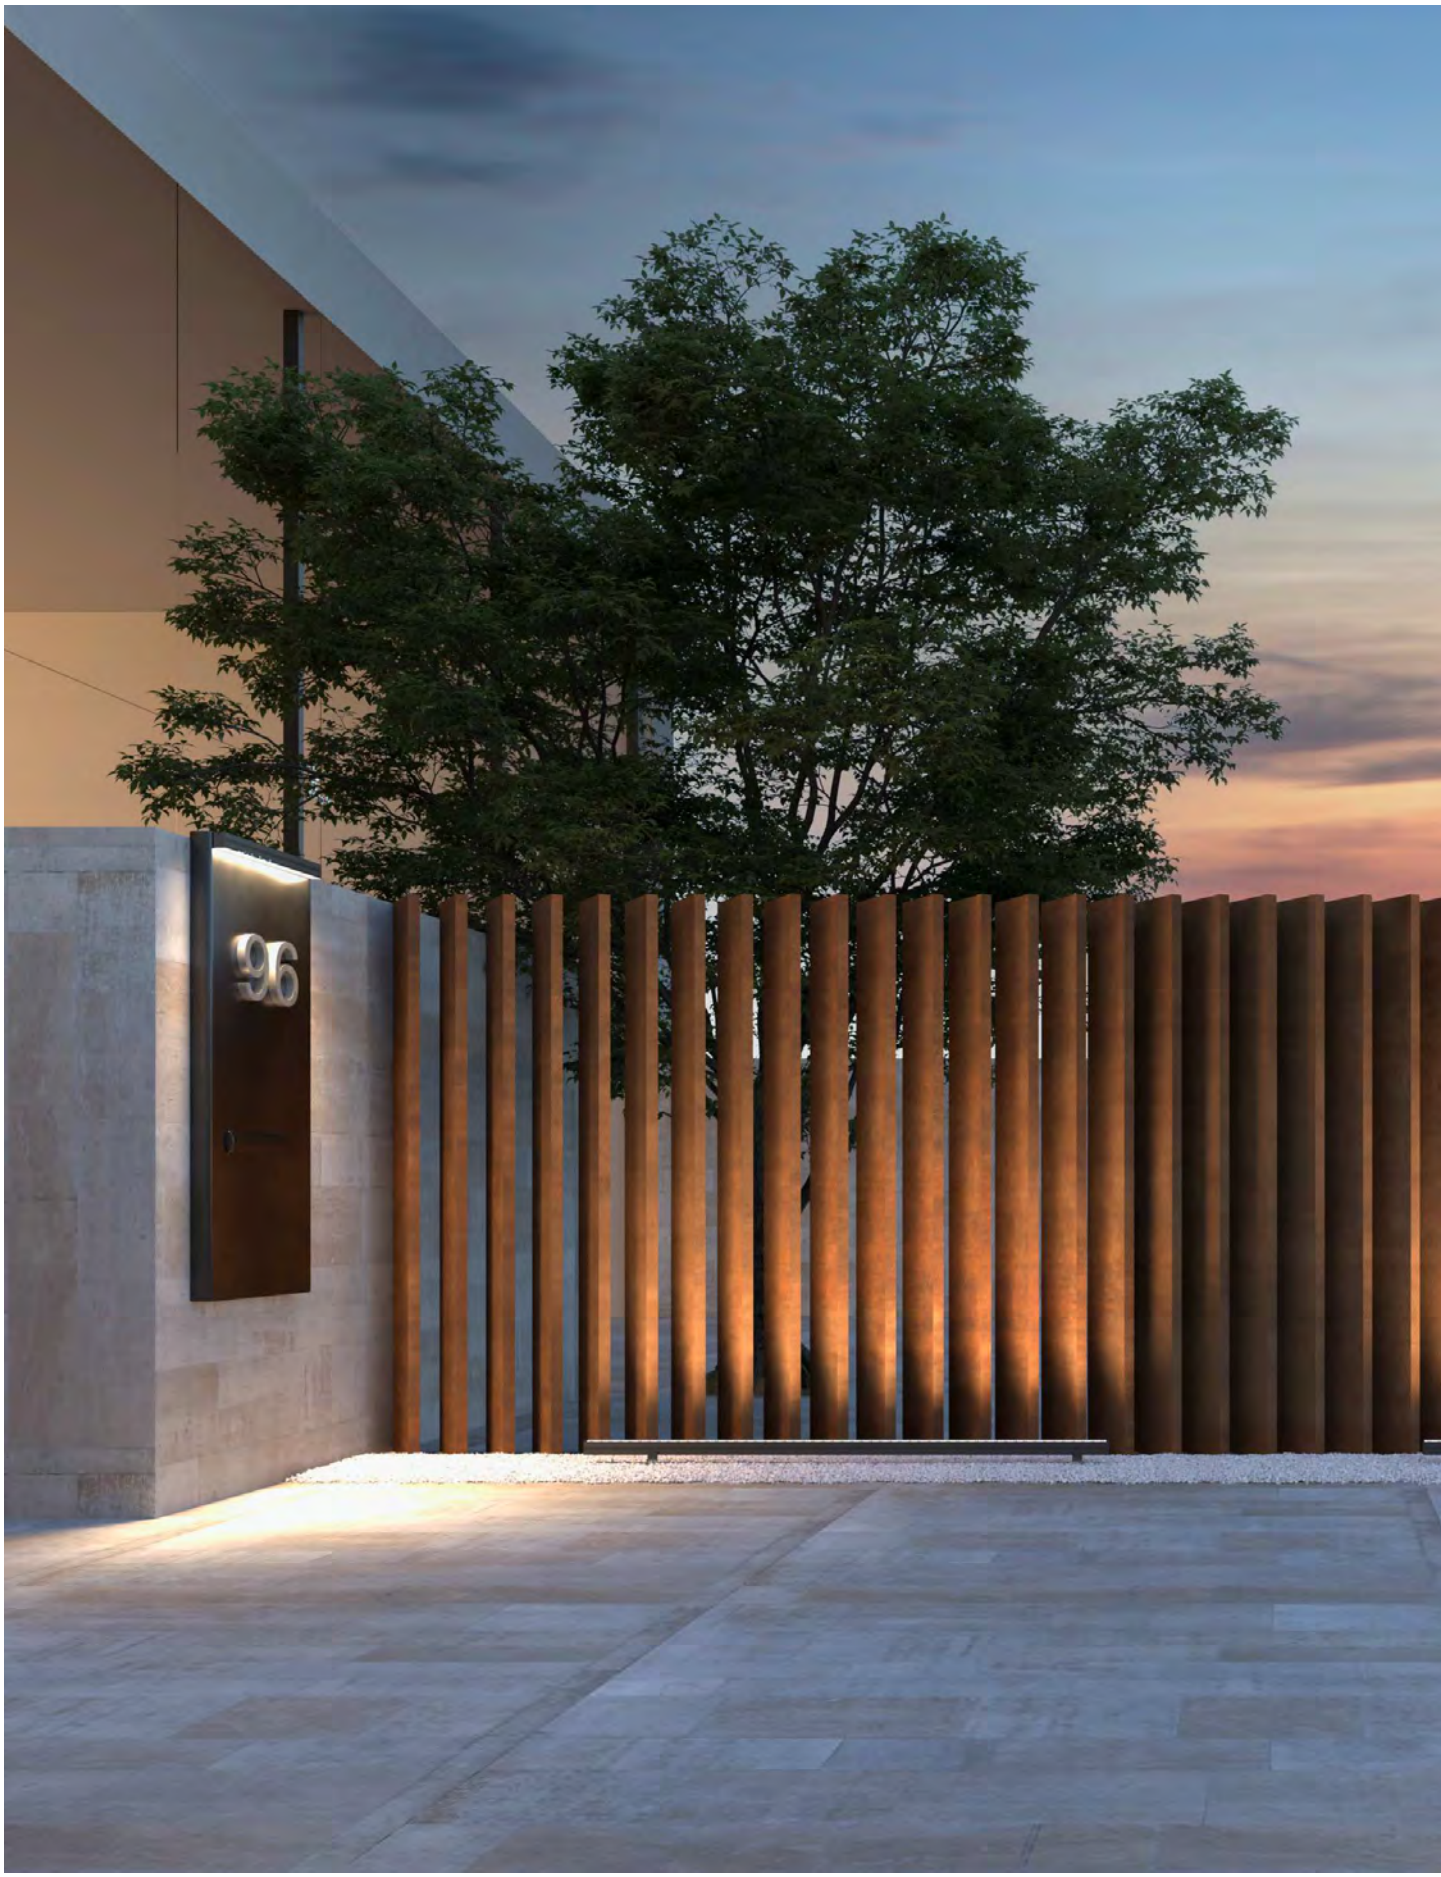

96





## Triton down






Control accessories pages 282-289.

*Finished luminaire. Includes power supply, 2mts power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 46W / 57W / 69W / 80W / 103W |
| Lumens | 5.152 lm - 14.008 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4 | Opal | 6 | 1.130mm | 3 | 2.700K (112 lm/W) - 40W/m | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.410mm | 4 | 3.000K (128 lm/W) - 40W/m | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (136 lm/W) - 40W/m | 4 | | | Custom RAL | C |
| | | | | 1.970mm | 6 | 5.500K (136 lm/W) - 40W/m | 5 | | | | |
| | | | | 2.530mm | 7 | | | | | | |

Code: 4 6

Consult delivery terms and conditions.

*Create your code acording to your preferences.

## Accessories



Wall bracket
- 40531
- 40532



Ceiling suspension
- 40510



Suspension Kit
- 40520 (2m)

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 230 VAC | PF >0,9 | CRI ≥95 | DALI 2

# **Blaber** acoustic panels for luminaires

In a world where the quality of sound and lighting is critical, the new range of Blaber panels, together with our luminaires, offer a comprehensive solution to meet acoustic and lighting comfort standards.
It has been proven that a healthy listening environment increases productivity and improves communication, which is why more and more professionals in the sector are focusing on multi-purpose solutions that combine attractive design with functionality.
Our panels, made from recycled PET material not only beautify spaces, but also contribute to more comfortable and relaxed environments by absorbing sound, avoiding reverberation, and providing adequate lighting.
The Blabler range is available in a variety of shapes, colors and with the possibility of customization.

En un mundo donde la calidad del sonido y la iluminación es fundamental, la nueva gama de paneles Blaber, junto con nuestras luminarias, ofrecen una solución integral para cumplir con los estándares de confort acústico y luminoso.
Está demostrado que un entorno auditivo saludable aumenta la productividad y mejora la comunicación, por esta razón cada vez son más los profesionales del sector que ponen especial interés en soluciones polivalentes que combinen un diseño atractivo con la funcionalidad.
Nuestros paneles hechos con material reciclado PET, no solo embellecen los espacios, sino que también contribuyen a crear entornos más cómodos y relajados, absorbiendo el sonido, evitando la reverberación y proporcionando una iluminación adecuada.
La gama Blabler está disponible en variedad de formas, colores y con la posibilidad de personalización.




Creative
Innov
Comunica




New

## Blaber line



Equipment

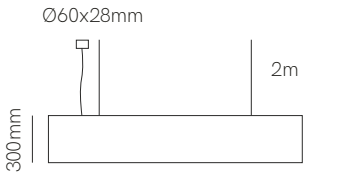


Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 30W / 39W / 49W |
| Lumens | 2.730 lm - 5.047 lm |
| Installation | Pendant |
| Material | Aluminium and PET felt |
| PCB | Rigid |


| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | B | Black Slats (60°) | 9 | 945mm | 2 | 2.700K (91 lm/W) - 34W/m | 2 | On / Off | 1 | Blue | 5 |
| | | | | 1.225mm | 3 | 3.000K (96 lm/W) - 34W/m | 3 | Dali | 2 | Black | 6 |
| | | | | 1.505mm | 4 | 4.000K (103 lm/W) - 34W/m | 4 | Push | 3 | Gray | 8 |
| | | | | | | | | Casambi | 5 | Orange | 9 |
| | | | | | | | | | | Custom | C |

Code: B 9

*Create your code acording to your preferences.


ⓘ Consult delivery terms and conditions.

Standard colors



5 6 8 9

Custom colors



C1 C2 C3 C4 C5 C6 C7 C8 C9 D1 D2 D3 D4 D6 D6 D7

CE RoHS


5 YEARS WARRANTY | 100% PET | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,55m Max | PUSH | DALI 2



New

## Blaber square






600x600mm



600x1.050mm




| Code | Size | | Presentation | | Installation | | Colour | |
|---|---|---|---|---|---|---|---|---|
| Code **BC** | 600x600mm | **3** | Sound Absorbing | **3** | Pendant wire | **2** | (i) Blue | **5** |
| | 600x1.050mm | **4** | (P) Custom | **9** | | | (i) Black | **6** |
| | | | | | | | (i) Gray | **8** |
| | | | | | | | (i) Orange | **9** |
| | | | | | | | (i) Custom | **C** |


Code: **BC** _ _ **2** _

(i) Consult delivery terms and conditions.

*Create your code acording to your preferences.


(P) Consult with project department to combine sound absorbing with luminaires.

Standard colors



5 6 8 9


Custom colors



C1 C2 C3 C4 C5 C6 C7 C8 C9 D1 D2 D3 D4 D6 D6 D7

RoHS


5 YEARS WARRANTY | | | | 100% PET |

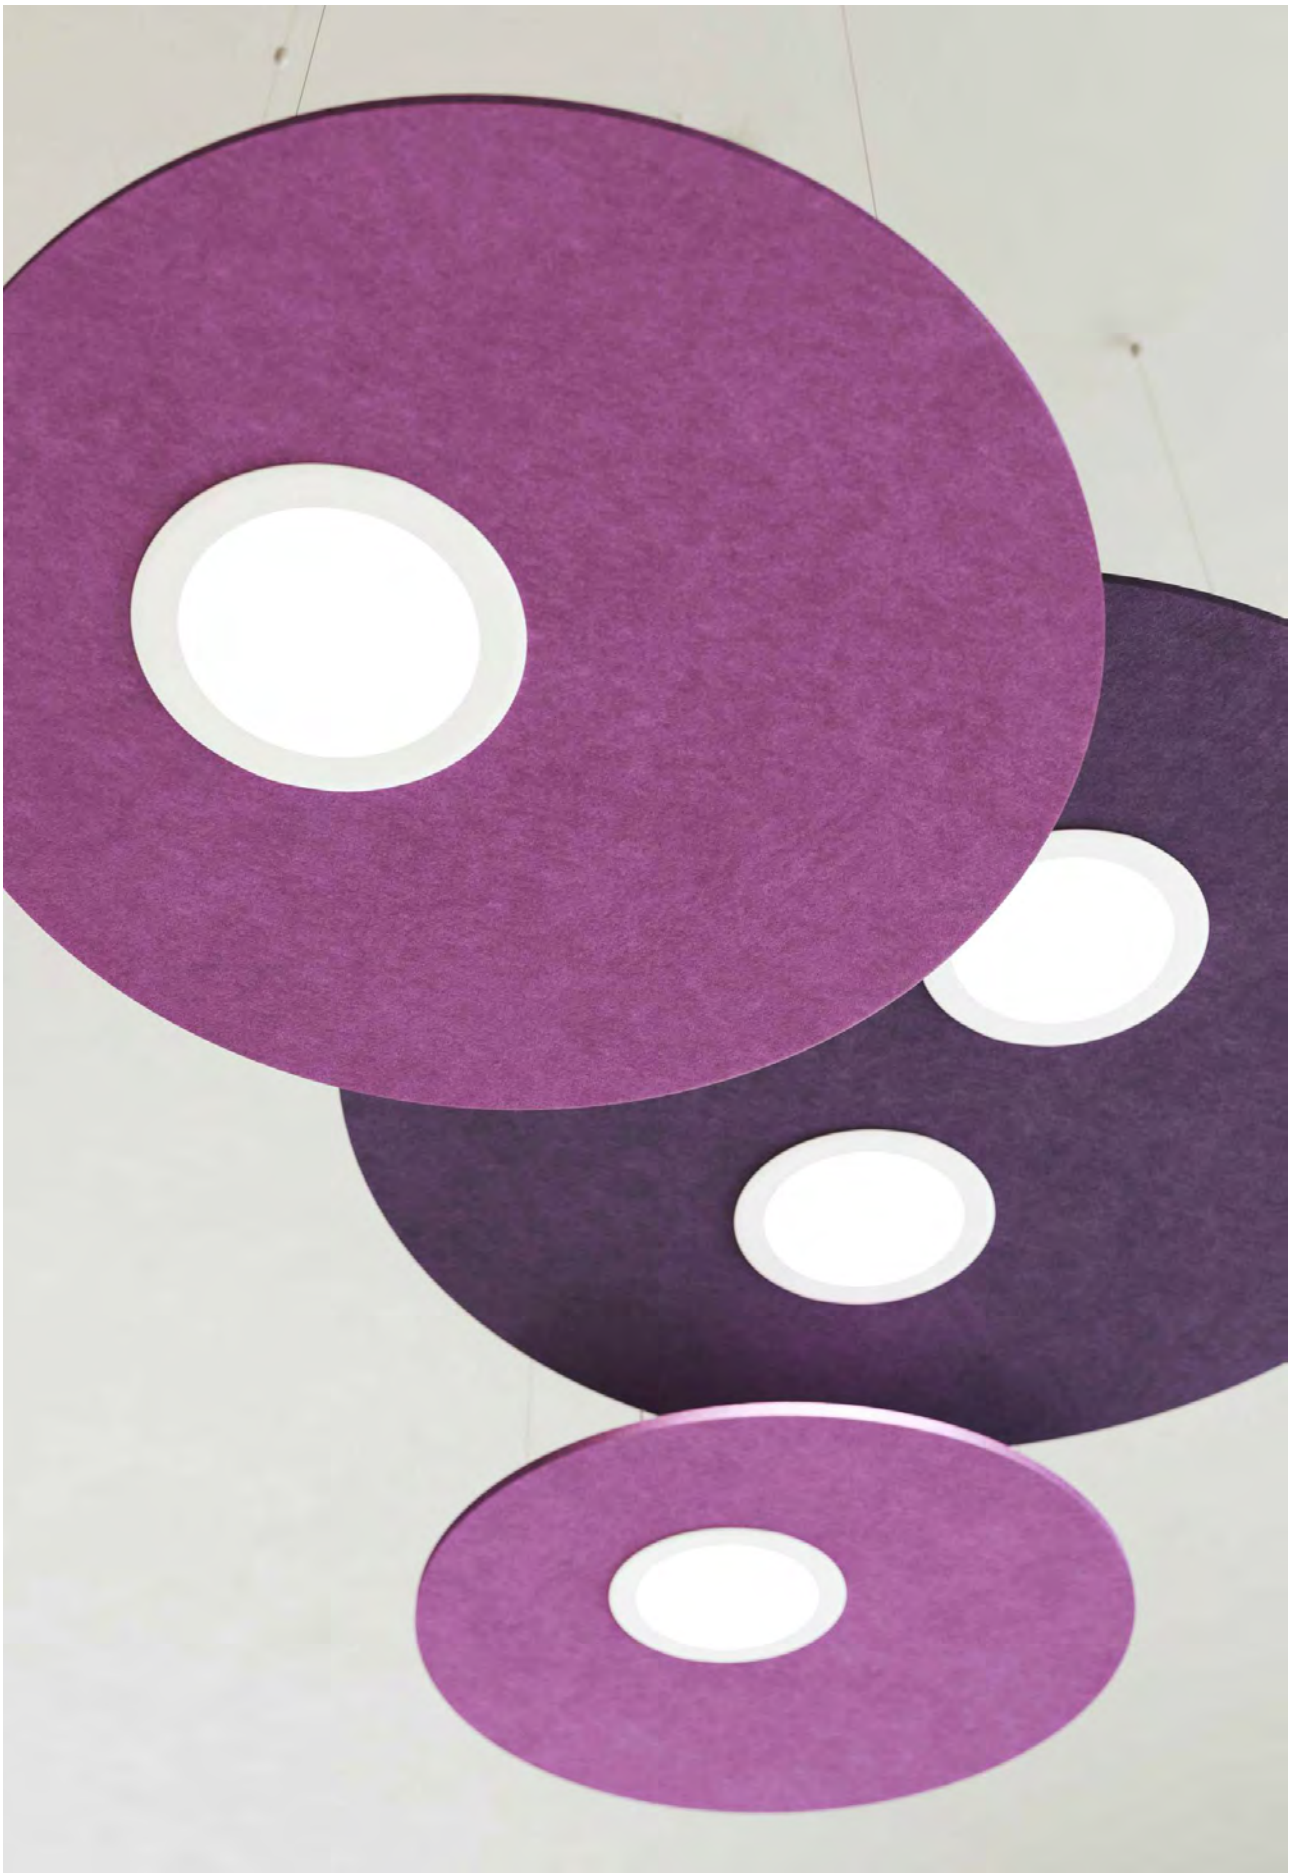


New

## Blaber round





Ø400/700/900/1.000mm




| Code | Size | Presentation | Installation | Colour |
|---|---|---|---|---|
| Code **BR** | 400mm **5** | Sound Absorbing **3** | Pendant wire **2** | ⓘ Blue **5** |
| | 700mm **6** | Ⓟ Custom **9** | | ⓘ Black **6** |
| | 900mm **7** | | | ⓘ Gray **8** |
| | 1.000mm **8** | | | ⓘ Orange **9** |
| | | | | ⓘ Custom **C** |


Code: **BR** _ _ **2** _

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.


Ⓟ Consult with project department to combine sound absorbing with luminaires.

Standard colors



5 6 8 9

Custom colors



C1 C2 C3 C4 C5 C6 C7 C8 C9 D1 D2 D3 D4 D6 D6 D7

RoHS


5 YEARS WARRANTY | | | | 100% PET |




New

## Blaber triangular





600x600x600mm / 840x840x840mm




| Code | Size | Presentation | Installation | Colour |
|---|---|---|---|---|
| Code **BT** | 600x600x600mm **1** | Sound Absorbing **3** | Pendant wire **2** | ⓘ Blue **5** |
| | 840x840x840mm **2** | Ⓟ Custom **9** | | ⓘ Black **6** |
| | | | | ⓘ Gray **8** |
| | | | | ⓘ Orange **9** |
| | | | | ⓘ Custom **C** |


Code: **BT** _ _ **2** _

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.


Ⓟ Consult with project department to combine sound absorbing with luminaires.

Standard colors



5 6 8 9

Custom colors



C1 C2 C3 C4 C5 C6 C7 C8 C9 D1 D2 D3 D4 D6 D6 D7

RoHS

5 YEARS WARRANTY | | | | 100% PET |

# Luminaires accessories

## Time



End caps
- ☐ 40741
- ■ 40742
- ▢ 40743



End caps
- ☐ 40751
- ■ 40752
- ▢ 40753



Joint 180°
- ▢ 40770



Joint 90°
- ▢ 40990



Joint 90°
- ▢ 40410



Joint 120°
- ▢ 40666



Wall bracket
- ☐ 40851
- ■ 40852
- ▢ 40853



Trimless
- ▢ 40339

## Urban



End caps
- ☐ 40721
- ■ 40722
- ▢ 40723



End caps
- ☐ 40731
- ■ 40732
- ▢ 40733



Joint 180°
- ▢ 40220



Joint 90°
- ▢ 40550



Joint 90°
- ▢ 40610



Joint 120°
- ▢ 40999



Wall bracket
- ☐ 40851
- ■ 40852
- ▢ 40853



Trimless
- ▢ 40669

## Time / Urban



Base 3x0,75 (2,5m)
Ø60x28mm
- ☐ 40881
- ■ 40882
- ▢ 40883



Base 5x0,5 (2,5m)
Ø60x28mm
- ☐ 40991
- ■ 40992
- ▢ 40993



Base 3x0,75 (5m)
Ø60x28mm
- ☐ 40581
- ■ 40582
- ▢ 40583



Base 5x0,5 (5m)
Ø60x28mm
- ☐ 40591
- ■ 40592
- ▢ 40593



Ceiling suspension
- ▢ 40780



Suspension kit
- ▢ 40790 (2m)
- ▢ 40795 (5m)



Recessed base
3x0,75 (2,5m)
Ø75x30mm
- ☐ 40831
- ■ 40832
- ▢ 40833



Recessed base
5x0,5 (2,5m)
Ø75x30mm
- ☐ 40931
- ■ 40932
- ▢ 40933



Recessed base
3x0,75 (5m)
Ø75x30mm
- ☐ 40481
- ■ 40482
- ▢ 40483



Recessed base
Base 5x0,5 (5m)
Ø75x30mm
- ☐ 40541
- ■ 40542
- ▢ 40543

## Zero Design



Base Ø330x41mm

| | | | |
|---|---|---|---|
| ☐ | Z12411 | ■ Z12412 | 240W/24VDC ON/OFF |
| ☐ | Z12421 | ■ Z12422 | 200W/24VDC DALI |
| ☐ | Z12431 | ■ Z12432 | 240W/24VDC PUSH |
| ☐ | Z12451 | ■ Z12452 | 240W/24VDC CASAMBI |
| ☐ | Z12471 | ■ Z12472 | 240W/24VDC TUYA |



Base Ø280x41mm

| | | | |
|---|---|---|---|
| ☐ | Z11511 | ■ Z11512 | 150W/24VDC ON/OFF |
| ☐ | Z11521 | ■ Z11522 | 120W/24VDC DALI |
| ☐ | Z11531 | ■ Z11532 | 150W/24VDC PUSH |
| ☐ | Z11551 | ■ Z11552 | 150W/24VDC CASAMBI |
| ☐ | Z11571 | ■ Z11572 | 150W/24VDC TUYA |



Base Ø250x41mm

| | | | |
|---|---|---|---|
| ☐ | Z11011 | ■ Z11012 | 75W/24VDC ON/OFF |
| ☐ | Z11021 | ■ Z11022 | 75W/24VDC DALI |
| ☐ | Z11031 | ■ Z11032 | 75W/24VDC PUSH |
| ☐ | Z11051 | ■ Z11052 | 75W/24VDC CASAMBI |
| ☐ | Z11071 | ■ Z11072 | 75W/24VDC TUYA |

## Power supplies linear box



Base 455x47x28mm

| | | | |
|---|---|---|---|
| ☐ | 35331 | ■ 35332 | 30W/24VDC |
| ☐ | 35361 | ■ 35362 | 60W/24VDC |
| ☐ | 35311 | ■ 35312 | 100W/24VDC |

# Profiles

| | Model | Page | Section Size | Installation |
|---|---|---|---|---|
| | BOX 12 | 192 | 10x15 mm | Surface |
| | BOX 16 | 166 | 17,3x7 mm | Surface |
| | BOX 18 | 169 | 17,3x14,5 mm | Surface |
| | BOX 23 | 172 | 23x10,8 mm | Surface |
| | BOX 28 | 197 | 18x22,2 mm | Surface |
| NEW | BOX 73 | 193 | 21x21 mm | Surface |
| NEW | BOX 75 | 182 | 16x24,5 mm | Surface / Pendant |
| NEW | BOX 99 | 185 | 10x12 mm | Surface / Pendant |
| | BOX 19 | 180 | 25x25 mm | Surface / Pendant |
| | BOX 39 | 196 | Ø28 mm | Surface / Pendant |
| | BOX 35 | 176 | 35x35 mm | Surface / Pendant |
| NEW | BOX 95 | 183 | 23,25x22 mm | Recessed |
| | BOX 11 | 195 | 16x15 mm | Recessed |
| | BOX 15 | 167 | 25x7 mm | Recessed |
| | BOX 17 | 171 | 25x14,5mm | Recessed |
| | BOX 53 | 173 | 30,5x10,8mm | Recessed |
| | BOX 10 | 181 | 35x25 mm | Recessed |


| Max Power | IP | Standard finishes | Standard Size |
|---|---|---|---|
| 15W MAX | 20 IP | Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 25W MAX | 20 IP | White Black Alum. | 2m |
| 40W MAX | 20 IP | Alum. | 2m |
| 22W MAX | 20 IP | White Black Alum. | 2m |
| 15W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | Black White | 2m |
| 25W MAX | 20 IP | White Black Alum. | 2m |
| 25W MAX | 20 IP | Black | 2m |
| 40W MAX | 20 IP | White Black Alum. | 2m |
| 22W MAX | 20 IP | White Black Alum. | 2m |
| 15W MAX | 20 IP | Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 25W MAX | 20 IP | White Black Alum. | 2m |
| 25W MAX | 20 IP | White Black Alum. | 2m |


| | Model | Page | Section Size | Installation |
|---|---|---|---|---|
| | BOX 38 | 177 | 50x35 mm |  Recessed |
| NEW | BOX 68 | 175 | 60x13 mm |  Trimless |
| | BOX 37 | 179 | 79x32 mm |  Trimless |
| | BOX 14 | 186 | 16x16 mm |  Surface / Corner |
| NEW | BOX 24 | 189 | 29,5x17,4 mm |  Recessed |
| NEW | BOX 60 | 187 | 20x16 mm |  Surface / Corner |
| NEW | BOX 71 | 190 | 18,4x18,4 mm |  Surface / Corner |
| | BOX 13 | 191 | 17,9x5,7 mm |  Surface / Flex |
| | BOX 22 | 200 | 17,8x48,6 mm |  Surface |
| | BOX 27 | 203 | 17,7x43,5 mm |  Surface |
| | BOX 33 | 201 | 29,4x50 mm |  Surface |
| NEW | BOX 98 | 199 | 78,8x95 mm |  Surface / Railing |
| | BOX 21 | 202 | 26,2x76,2 mm |  Recessed |
| NEW | BOX 65 | 205 | 15x80 mm |  Surface |
| NEW | BOX 67 | 207 | 65x28 mm |  Surface / Stairs |
| | BOX 29 | 208 | 21x26mm |  Recessed |
| | BOX 30 | 209 | 12x2 mm / 20x2mm |  Surface |

| Max Power | IP | Standard finishes | Standard Size |
|---|---|---|---|
| 40W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | White Black | 2m |
| 40W MAX | 40 IP | White | 2m |
| 15W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 22W MAX | 20 IP | White Black Alum. | 2m |
| 15W MAX | 20 IP | Alum. | 2m |
| 2x15W MAX | 20 IP | Black Alum. | 2m |
| 15W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 2x15W MAX | 20 IP | White Black | 2m |
| 15W MAX | 20 IP | White Alum. | 2m |
| 12W MAX | 20 IP | White Black Alum. | 2m |
| 12W MAX | 20 IP | Black | 2m |
| 25W MAX | 55 IP | Alum. | 2m |
| 20W MAX 40W MAX | 20 IP | Alum. | 2m |


## Box 16






*Useful area: 12x5mm.




Compatible led strips p. 294.

### Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 16121 |
| | ■ 16122 |
| | ☐ 16119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

### Accessories



Diffuser PC Transp. 90%
☐ 20450



Diffuser PC Opal 70%
☐ 20440



Diffuser PC Black 50%
■ 20472



Diffuser Silicone Opal 60%
☐ 20469
☐ 20469-15



End Cap
☐ 16631
■ 16632
☐ 16633



End Cap
☐ 16621
■ 16622
☐ 16623



Clip Metallic
☐ 20330



Clip Rotable Metallic
☐ 20350




Clip PC
☐ 20380
■ 20382

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 15













*Useful area: 12x5mm.

Compatible
led strips p. 294.



## Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 15121 |
| | ■ 15122 |
| | ☐ 15119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Transp. 90%
☐ 20450



Diffuser PC
Opal 70%
☐ 20440



Diffuser PC
Black 50%
■ 20472



Diffuser
Silicone
Opal 60%
☐ 20469
☐ 20469-15



End Cap
☐ 15631
■ 15632
☐ 15633



End Cap
☐ 15621
■ 15622
☐ 15623

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



## Box 18









*Useful area: 12x10mm.

Compatible
led strips p. 294.


## Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 18121 |
| | ■ 18122 |
| | ▩ 18119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Transp. 90%
☐ 20450

Diffuser PC Opal 70%
▩ 20440

Diffuser PC Black 50%
■ 20472

Diffuser Silicone Opal 60%
▩ 20469
▩ 20469-15

End Cap
☐ 18631
■ 18632
▩ 18633

End Cap
☐ 18621
■ 18622
▩ 18623

Diffuser PC Optic 60° Transp. 90%
☐ 20430

End Cap 60°
☐ 18651
■ 18652
▩ 18653

End Cap 60°
☐ 18661
■ 18662
▩ 18663

Clip Metallic
▩ 20330

Clip Rotable Metallic
▩ 20350

Clip PC
▩ 20380
■ 20382


CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



## Box 17








65°

18mm x L

*Useful area: 12x10mm.

Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 17121 |
| | ■ 17122 |
| | ☐ 17119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Transp. 90%
☐ 20450



Diffuser PC
Opal 70%
☐ 20440



Diffuser PC
Black 50%
■ 20472



Diffuser
Silicone
Opal 60%
☐ 20469
☐ 20469-15



End Cap
☐ 17631
■ 17632
☐ 17633




End Cap
☐ 17621
■ 17622
☐ 17623

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 23










*Useful area: 20x6mm.



Compatible led strips p. 294.

### Technical Information

| | |
|---|---|
| Max. power | 25W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 23121 |
| | ■ 23122 |
| | ▩ 23119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

### Accessories



Diffuser PC Opal 70%
▩ 23480



End Cap
☐ 23631
■ 23632
▩ 23633



End Cap
☐ 23621
■ 23622
▩ 23623




Clip PC
▩ 23380


CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

## Box 53






*Useful area: 20x6mm.

Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 25W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 53121 |
| | ■ 53122 |
| | ▩ 53119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
▩ 23480



End Cap
☐ 53631
■ 53632
▩ 53633



End Cap
☐ 53621
■ 53622
▩ 53623


CE RoHS


3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063



New

## Box 68

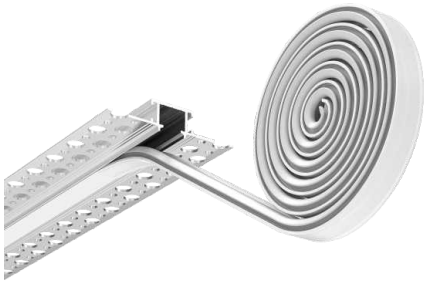

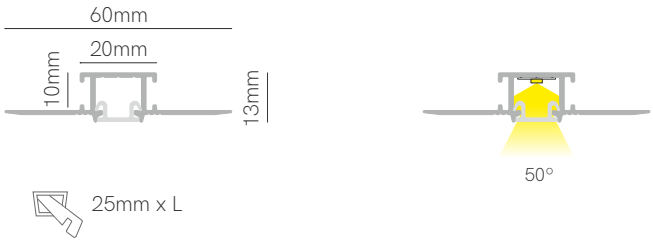


*Useful area: 12x3mm.

Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Trimless |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 68121 |
| | ■ 68122 |

## Accessories


Diffuser Continuous
☐ 68997


Diffuser Continuous
■ 68502


End Cap
☐ 68631
■ 68632


End Cap
☐ 68621
■ 68622


Joint 90° Metallic
68450


Joint 90° Metallic
68510



Joint 180° Metallic
68520


CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063


## Box 35






*Useful area: 23x20mm.



Compatible led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 40W/m |
| Installation | Surface / Pendant |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 35121 |
| | ■ 35122 |
| | ▢ 35119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
☐ 20700



Diffuser PC Black 50%
■ 20772



End Cap
☐ 35621
■ 35622
▢ 35623



Clip Metallic
▢ 35330



Joint 90° Metallic
▢ 20510



Joint 90° Metallic
▢ 20540



Joint 120° Metallic
▢ 20530



Joint 180° Metallic
▢ 20520



Suspension Kit Metallic
▢ 20720 (2m)




Base 455x47x28mm
☐ 35331 ■ 35332 (30W/24V)
☐ 35361 ■ 35362 (60W/24V)
☐ 35311 ■ 35312 (100W/24V)

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

## Box 38



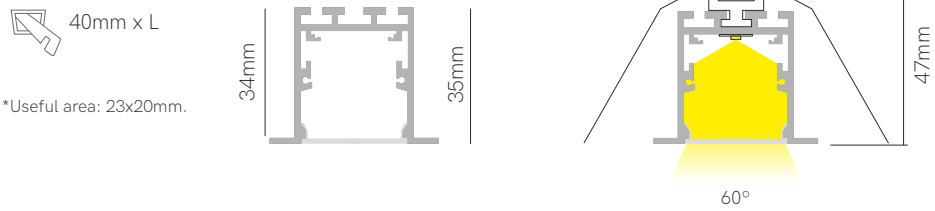


Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 40W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 38121 |
| | ■ 38122 |
| | ☐ 38119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
☐ 20700



Diffuser PC
Black 50%
■ 20772



End Cap
☐ 38621
■ 38622
☐ 38623



Joint 90°
Metallic
☐ 20510



Joint 90°
Metallic
☐ 20540



Joint 120°
Metallic
☐ 20530



Joint 180°
Metallic
☐ 20520



Spring Clip
Metallic
☐ 20710

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



Private Residence, Guadalajara (Spain). Design: Carlos Lozano.

## Box 37






40mm x L

*Useful area: 23x20mm.

Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 40W/m |
| Installation | Trimless |
| Material | Aluminium |
| Finishes | White |

| | |
|---|---|
| Code | ☐ 37121 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
☐ 37480




End Cap
☐ 37621


CE RoHS

3 YEARS WARRANTY | IP 40 | 2m Max | AL 6063

## Box 19






*Useful area: 12x17,7mm.

Compatible led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 25W/m |
| Installation | Surface / Pendant |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 19121 |
| | ■ 19122 |
| | ☐ 19119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
☐ 20490

Diffuser PC Black 50%
■ 20502

Diffuser Continuous
☐ 20997

End Cap
☐ 19621
■ 19622
☐ 19623

Clip Metallic
☐ 19330

Joint 90° Metallic
☐ 20510

Joint 90° Metallic
☐ 20540

Joint 120° Metallic
☐ 20530

Joint 180° Metallic
☐ 20520

Suspension Kit Metallic
☐ 20720 (2m)


Base 455x47x28mm
☐ 35331 ■ 35332 (30W/24V)
☐ 35361 ■ 35362 (60W/24V)
☐ 35311 ■ 35312 (100W/24V)


CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

## Box 10






*Useful area: 12x17,7mm.

Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 25W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 10121 |
| | ■ 10122 |
| | ☐ 10119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories


Diffuser PC
Opal 70%
☐ 20490


Diffuser PC
Black 50%
■ 20502


Diffuser
Continuous
☐ 20997


End Cap
☐ 10621
■ 10622
☐ 10623


Joint 90°
Metallic
■ 20510


Joint 90°
Metallic
■ 20540


Joint 120°
Metallic
■ 20530


Joint 180°
Metallic
■ 20520


Spring Clip
Metallic
■ 20710

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

New

## Box 75









*Useful area: 12x3mm.



Compatible led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 15W/m |
| Installation | Surface / Pendant |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 75121 |
| | ■ 75122 |
| | ▩ 75119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Opal Prismatic
☐ 75440



End Cap
☐ 75621
■ 75622
▩ 75623



Hanging bracket Metallic
▩ 75330



Suspension Kit Metallic
▩ 75720 (2m)


CE RoHS


3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

New

## Box 95






21mm x L

*Useful area: 12x3mm.

Compatible
led strips p. 294.

### Technical Information

| | |
|---|---|
| Max. power | 22W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 95121 |
| | ■ 95122 |
| | ▩ 95119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

### Accessories



Opal
Prismatic
☐ 75440



End Cap
☐ 95631
■ 95632
▩ 95633



End Cap
☐ 95621
■ 95622
▩ 95623



Clip
Metallic
▩ 24710

CE RoHS


3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



New

## Box 99









*Useful area: 8x3mm.

Compatible led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Surface / Pendant |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 99121 |
| | ■ 99122 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories


Diffuser PC Opal 70%
☐ 99440


End Cap
☐ 99621
■ 99622


Suspension Kit Metallic
☐ 99721 (2m)
■ 99722 (2m)


Joint 90° Metallic
▩ 99510
■ 99512


Joint 90° Metallic
▩ 99540
■ 99542



Joint 180° Metallic
▩ 99520
■ 99522


CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

## Box 14






*Useful area: 10x5mm.

Compatible led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 15W/m |
| Installation | Surface / corner |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 14121 New |
| | ■ 14122 New |
| | ☐ 14119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
☐ 14480



End Cap
☐ 14631
■ 14632
☐ 14633



End Cap
☐ 14621
■ 14622
☐ 14623



Clip
Metallic
■ 14330


CE RoHS


3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063


New


## Box 60






*Useful area: 12x3mm.

Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Surface / corner |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 60121 |
| | ■ 60122 |
| | ▩ 60119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
☐ 60440



End Cap
☐ 60631
■ 60632
▩ 60633



End Cap
☐ 60621
■ 60622
▩ 60623



Clip
Metallic
▩ 60330

CE RoHS


3 YEARS WARRANTY | IP 20 | 30°-60° | 2m Max | AL 6063



DEEP WATER
DAVE SIV
Little One
TAKE THAT NURSING HOMES AND SHOVE IT!
TO KILL A MOCKINGBIRD

New

## Box 24








27mm x L

*Useful area: 12x3mm.

Compatible
led strips p. 294. 

## Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 24121 |
| | ■ 24122 |
| | ▩ 24119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories


Diffuser PC
Opal 70%
☐ 20440


End Cap
☐ 24631
■ 24632
▩ 24633


End Cap
☐ 24621
■ 24622
▩ 24623


Spring Clip
Metallic
▩ 24710


CE RoHS


3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

New

## Box 71






*Useful area: 14x5mm.

Compatible led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 22W/m |
| Installation | Surface / corner |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 71121 |
| | ■ 71122 |
| | ▩ 71119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
☐ 71440



End Cap
☐ 71631
■ 71632
▩ 71633



End Cap
☐ 71621
■ 71622
▩ 71623



Clip
Metallic
▩ 71330

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063


## Box 13












*Useful area: 12x3mm.

Compatible
led strips p. 294.

### Technical Information

| | |
|---|---|
| Max. power | 15W/m |
| Installation | Surface / flex |
| Material | Aluminium |
| Finishes | Aluminium |

| | |
|---|---|
| Code | 13113 |

### Accessories



Diffuser PC
Opal 70%
13480



End Cap
13633



End Cap
13623



Clip
Metallic
13330

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 12










*Useful area: 5x10mm.



Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 15W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | Aluminium |

| | |
|---|---|
| Code | ☐ 12119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
☐ 20480



End Cap
☐ 12633



End Cap
☐ 12623



Clip
Metallic
☐ 20730


CE RoHS


3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

New

## Box 73






*Useful area: 12x7mm.

Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 22W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 73121 |
| | ■ 73122 |
| | ■ 73119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
■ 73440



End Cap
☐ 73621
■ 73622
■ 73623



End Cap
☐ 73631
■ 73632
■ 73633


CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



## Box 11













*Useful area: 5x10mm.

Compatible
led strips p. 294.



## Technical Information

| | |
|---|---|
| Max. power | 15W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | Aluminium |

| Code | |
|---|---|
| | ☐ 11119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
☐ 20480



End Cap
☐ 11633



End Cap
☐ 11623

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

## Box 39






*Useful area: 12x8mm.

Compatible led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 25W/m |
| Installation | Surface / Pendant |
| Material | Aluminium |
| Finishes | Black |

| Code | |
|---|---|
| | ■ 39122 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
☐ 39440



Diffuser PC Transp. 90%
☐ 39450



Diffuser PC Optic 30%
☐ 39430



End Cap
■ 39622



Clip Plastic
☐ 25530



Suspension Kit
☐ 25887 (2m)



Base 455x47x28mm
☐ 35331 (30W/24V) ■ 35332 (30W/24V)
☐ 35361 (60W/24V) ■ 35362 (60W/24V)
☐ 35311 (100W/24V) ■ 35312 (100W/24V)

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

## Box 28










*Useful area: 12x5mm.

Compatible
led strips p. 294.



## Technical Information

| | |
|---|---|
| Max. power | 40W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | Aluminium |

| Code | |
|---|---|
| | 28119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Optic 30%
28430



End Cap
28633




End Cap
28623



Clip
Metallic
28330

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

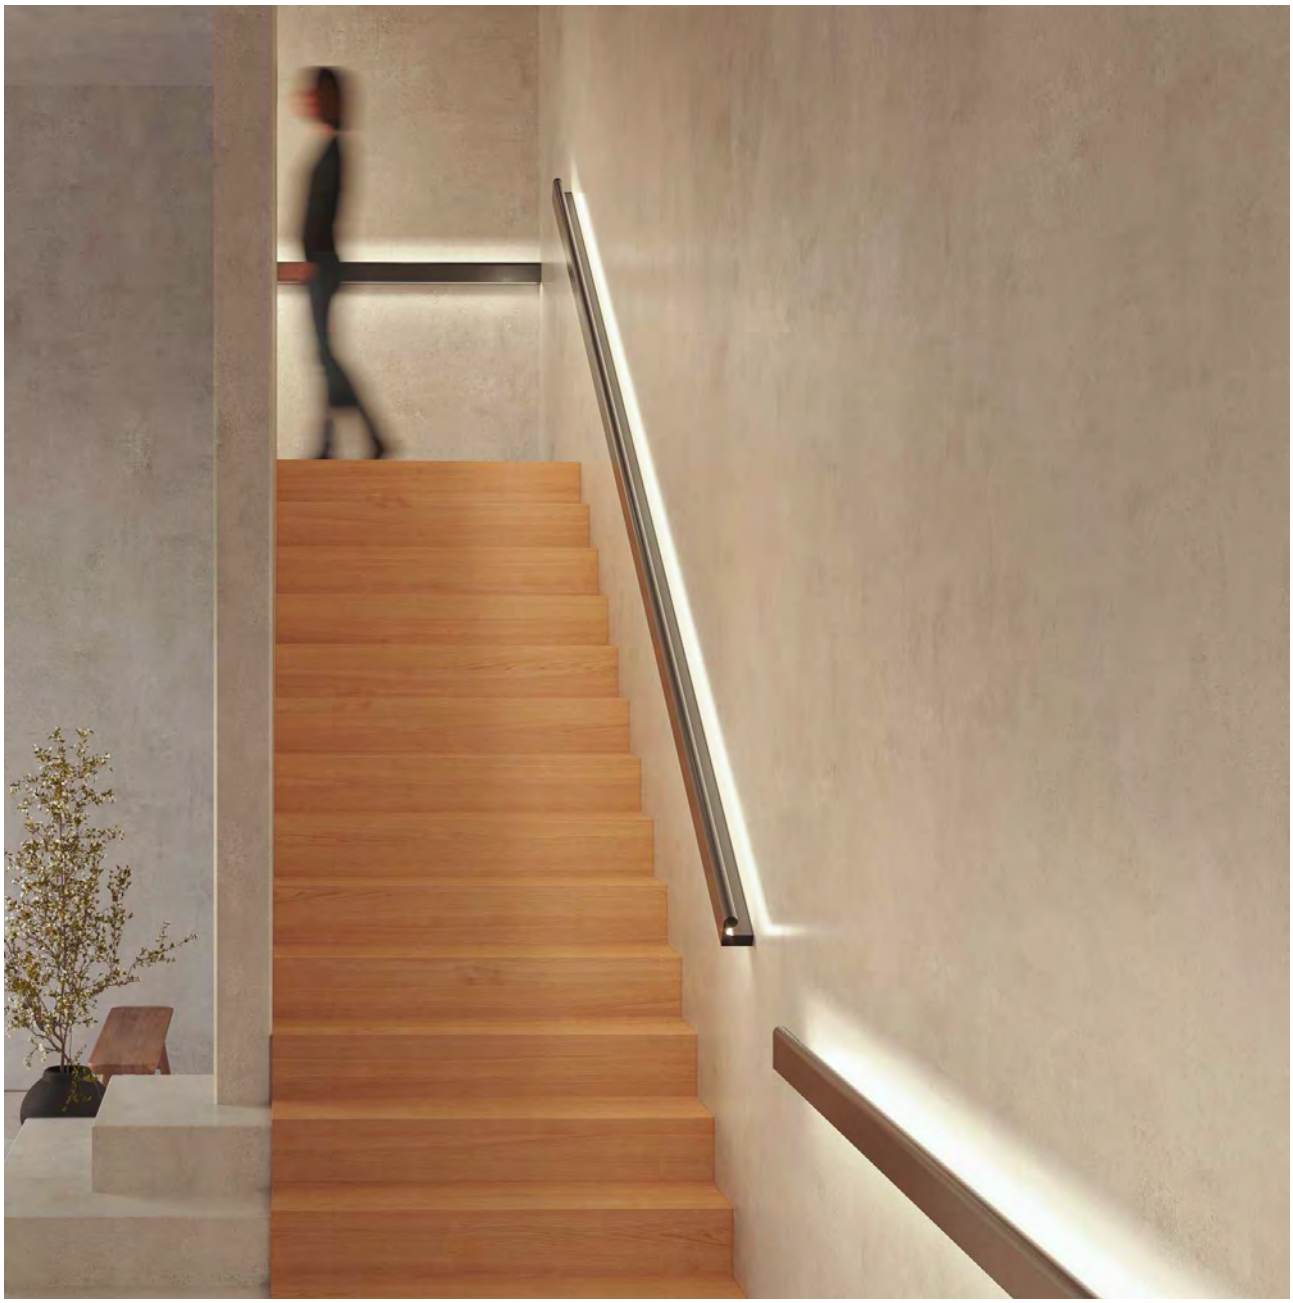





New

## Box 98 railing






Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 2x15W/m |
| Installation | Surface / railing |
| Material | Aluminium |
| Finishes | Black / White |

| Code | |
|---|---|
| | ☐ 98121 |
| | ■ 98122 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
☐ 98440




End Cap
☐ 98621
■ 98622


CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 22






*Useful area: 12x3mm.

Compatible led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 2x15W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | Black / Aluminium |

| Code | |
|---|---|
| | ■ 22122 |
| | □ 22119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
□ 20497



Diffuser Silicone Opal 60%
□ 20469
□ 20469-15



End Cap
■ 22622
□ 22623





Clip Metallic
□ 22330

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063


## Box 33



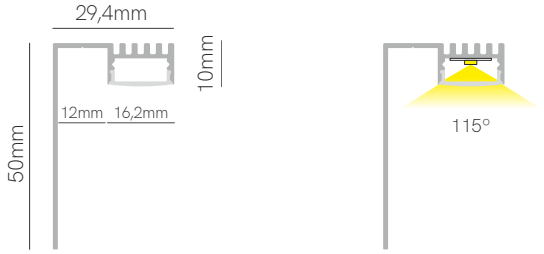


*Useful area: 12,6x6,3mm.

Compatible
led strips p. 294.



## Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 33121 |
| | ■ 33122 |
| | ▪ 33119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
☐ 33440



Diffuser
Silicone
Opal 60%
☐ 20469
☐ 20469-15




End Cap
☐ 33621
■ 33622
▪ 33623


CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

## Box 21






*Useful area: 12x3mm.

Compatible led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 15W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Aluminium |

| Code | |
|---|---|
| | ☐ 21121 |
| | ☐ 21119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
☐ 20497



Diffuser Silicone Opal 60%
☐ 20469
☐ 20469-15



End Cap
☐ 21631
☐ 21633



End Cap
☐ 21621
☐ 21623


CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 27






*Useful area: 12x3mm.

Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 15W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 27121 |
| | ■ 27122 |
| | ▩ 27119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
☐ 20497



Diffuser
Silicone Opal 60%
☐ 20469
☐ 20469-15



End Cap left
☐ 27631
■ 27632
▩ 27633



End Cap right
☐ 27621
■ 27622
▩ 27623

CE RoHS


3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



New

## Box 65



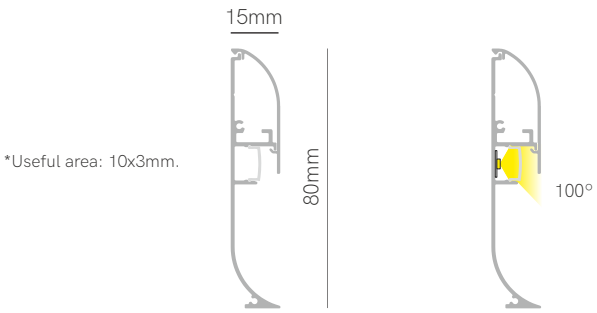


Compatible
led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 12W/m |
| Installation | Surface / skirting |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 65121 |
| | ■ 65122 |
| | ▩ 65119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
▩ 65440



x2

End Cap
☐ 65621
■ 65622
▩ 65623



90° outside
connector
☐ 65221
■ 65222
▩ 65223



90° inside
connector
☐ 65331
■ 65332
▩ 65333



Joint 180°
Metallic
▩ 65550

CE RoHS


3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063


A

New

## Box 67



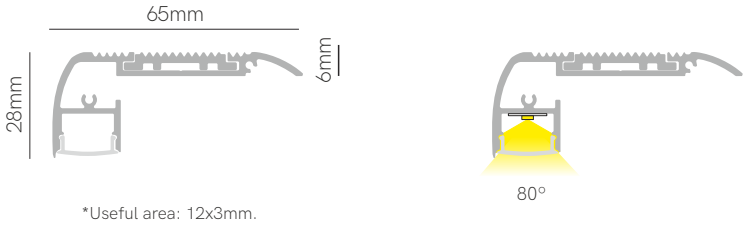


*Useful area: 12x3mm.

Compatible
led strips p. 294.

### Technical Information

| | |
|---|---|
| Max. power | 12W/m |
| Installation | Surface / stairs |
| Material | Aluminium |
| Finishes | Black |

| | |
|---|---|
| Code | ■ 67122 |

### Accessories



Diffuser PC
Opal 70%
□ 67440



End Cap
■ 67632




PVC anti-skid cover
■ 67452

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

## Box 29









*Useful area: 12x18mm.

Compatible led strips p. 294.

## Technical Information

| | |
|---|---|
| Max. power | 25W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | Aluminium |

| Code | |
|---|---|
| | 29119 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
29480



End Cap
29623

CE RoHS


3 YEARS WARRANTY | IP 55 | IK10 | 1000kg | 2m Max | AL 6063


## Box 30 12mm




## Box 30 20mm







Compatible
led strips p. 294.



## Technical Information

| | | |
|---|---|---|
| Max. power | 20W/m | 40W/m |
| Installation | Surface | Surface |
| Material | Aluminium | Aluminium |
| Finishes | Aluminium | Aluminium |

| Code | | |
|---|---|---|
| | 30129 | 30209 |
| ⓘ | Custom RAL | Custom RAL |
| ⓘ | Electrolytic Plating | Electrolytic Plating |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

# LED Strips

| | Model | Page | Power | Width | CCT |
|---|---|---|---|---|---|
| NEW | FINE 64 | 216 | 2,5W/m | 10mm | 2700K 3000K 4000K |
| | FINE 84 | 219 | 4,8W/m | 10mm | 2700K 3000K 4000K 6000K |
| NEW | FINE 48 | 217 | 5W/m | 10mm | 2200K 2700K 3000K 4000K |
| | FINE 51 | 236 | 9,6W/m | 10mm | 2700K 3000K 4000K 6000K |
| | FINE 69 | 221 | 9,6W/m | 10mm | NEW 2200K 2700K 3000K 4000K 6000K |
| | FINE 49 | 235 | 10W/m | 4mm | 2700K 3000K 4000K 6000K |
| | FINE 31 | 225 | 12W/m | 10mm | NEW 2200K 2700K 3000K 4000K |
| | FINE 41 | 223 | 14,4W/m | 10mm | 2700K 3000K 4000K 6000K |
| | FINE 32 N | 237 | 15W/m | 12mm | 2700K 3000K 4000K 6000K |
| | FINE 61 | 227 | 15W/m | 10mm | 2700K 3000K 4000K 6000K |
| NEW | FINE 76 | 231 | 15W/m | 12mm | 3000K 4000K |
| | FINE 52 | 229 | 22W/m | 10mm | 2700K 3000K 4000K 6000K |
| | FINE 56 | 232 | 22W/m | 15mm | 2700K 3000K 4000K CCT |
| | FINE 55 | 233 | 24W/m | 20mm | 2700K 3000K 4000K |
| NEW | FINE 96 | 230 | 18W/m | 18,5mm | 3000K 4000K RGB-W |
| | FINE 50 | 252 | 9,6W/m | 5mm | RGB |
| NEW | FINE 54 | 247 | 14W/m | 10mm | RGB |
| | FINE 46 | 249 | 14,4W/m | 10mm | RGB |
| | FINE 43 | 251 | 19,2W/m | 12mm | RGB |

| Lumens | CRI | Density | Voltage | IP20 | IP65 | IP67 |
|---|---|---|---|---|---|---|
| 110-120 Lm/W | ≥90 CRI | 140 LED/m | 24 VDC |  | - | - |
| 95-102 Lm/W | ≥90 CRI | 70 LED/m | 24 VDC |  |  | - |
| 110-135 Lm/W | ≥90 CRI | 160 LED/m | 24 VDC |  | - | - |
| 100 Lm/W | ≥90 CRI | 120 LED/m | 24 VDC |  | |  |
| 87-102 Lm/W | ≥90 CRI | 140 LED/m | 24 VDC |  |  | - |
| 71-77 Lm/W | ≥90 CRI | 204 LED/m | 24 VDC |  | - | - |
| 85-100 Lm/W | ≥90 CRI | 512 LED/m | 24 VDC |  | |  |
| 92-102 Lm/W | ≥90 CRI | 140 LED/m | 24 VDC |  |  | |
| 100-110 Lm/W | ≥80 CRI | 112 LED/m | 220/240 VDC | - |  | - |
| 110-125 Lm/W | ≥90 CRI | 160 LED/m | 24 VDC |  |  | - |
| 120-128 Lm/W | ≥80 CRI | 126 LED/m | 24 VDC |  | - | - |
| 97-112 Lm/W | ≥90 CRI | 238 LED/m | 24 VDC |  | |  |
| 130-170 Lm/W | ≥80 CRI | 160 LED/m | 24 VDC |  | - | - |
| 80-86 Lm/W | ≥90 CRI | 120 LED/m | 24 VDC |  | - | - |
| 67,5-120 Lm/W | ≥90 CRI | 48 LED/m | 24 VDC | - | |  |
| 58 Lm/W | - | 120 LED/m | 24 VDC |  | - | - |
| 45-50 Lm/W | - | 120 LED/m | 24 VDC |  | |  |
| 38-41 Lm/W | - | 144 LED/m | 24 VDC |  |  | - |
| 90 Lm/W | - | 240 LED/m | 24 VDC |  | - | - |


| | Model | Page | Power | Width | CCT |
|---|---|---|---|---|---|
| | FINE 47 | 254 | 14,4W/m | 12mm | RGB-W |
| | FINE 66 | 253 | 20W/m | 12mm | RGB-W |
| NEW | FINE 71 | 255 | 21W/m | 12mm | RGB WW |
| | FINE 36 | 244 | 12W/m | 10mm | CCT |
| NEW | FINE 63 | 243 | 19W/m | 10mm | CCT |
| | FINE 42 | 245 | 19,2W/m | 10mm | CCT |
| | FINE 45 | 257 | 10W/m | 10mm | RED GREEN BLUE |
| | FINE 44 | 239 | 14,4W/m | 10mm | MEAT FISH FRUIT BREAD |
| NEW | FINE RUNNING | 259 | 12W/m | 10mm | 3000K 4000K |
| | FINE 25 | 268 | 20W/m | Ø25mm | 2400K 2700K 3000K 4000K CCT RGB |
| | FINE 70 | 272 | 5W/m | 12,8mm | 2700K 3000K 4000K RGB |
| | FINE 72 | 276 | 10W/m | 16mm | 2700K 3000K 4000K RGB |
| | FINE 74 | 278 | 10W/m | 24mm | 2700K 3000K 4000K RGB |
| NEW | FINE SPI-2 | 260 | 14W/m | 10mm | RGB |
| NEW | FINE SPI-3 | 261 | 11W/m | 10mm | RGB-W |
| NEW | FINE SPI-4 | 263 | 20W/m | Ø25mm | RGB |
| NEW | FINE DMX-4 | 264 | 12W/m | 12mm | RGB |
| NEW | FINE DMX-5 | 265 | 17W/m | 12mm | RGB-W |


| Lumens | CRI | Density | Voltage | IP20 | IP65 | IP67 |
|---|---|---|---|---|---|---|
| 18-60 Lm/W | - | 60 LED/m | 24 VDC |  | - | - |
| 172 Lm/W | - | 840 LED/m | 24 VDC |  | - |  |
| 29-117 Lm/W | - | 96 LED/m | 24 VDC |  | - |  |
| 100 Lm/W | ≥90 CRI | 140 LED/m | 24 VDC |  | - | - |
| 89-95 Lm/W | ≥90 CRI | 640 LED/m | 24 VDC |  | - |  |
| 90 Lm/W | ≥90 CRI | 168 LED/m | 24 VDC |  |  | - |
| 15-91 Lm/W | - | 480 LED/m | 24 VDC |  | - |  |
| 85-95 Lm/W | 75/97 CRI | 140 LED/m | 24 VDC |  | - | - |
| 79-87 Lm/W | ≥90 CRI | 360 LED/m | 24 VDC |  | - | - |
| 41-73 Lm/W | ≥90 CRI | 240-480 LED/m | 24 VDC | - | - |  |
| 15-37 Lm/W | ≥90 CRI | 96/140 LED/m | 24 VDC | - | - |  |
| 26-65 Lm/W | ≥90 CRI | 96/140 LED/m | 24 VDC | - | - |  |
| 22-65 Lm/W | ≥90 CRI | 96/140 LED/m | 24 VDC | - | - |  |
| 37 Lm/W | - | 84 LED/m | 24 VDC |  | - | - |
| 51 Lm/W | - | 60 LED/m | 24 VDC |  | - | - |
| 12,5 Lm/W | - | 168 LED/m | 24 VDC | - | - |  |
| 42 Lm/W | - | 70 LED/m | 24 VDC |  | - |  |
| 50 Lm/W | - | 70 LED/m | 24 VDC |  | - |  |

New

## Fine 64



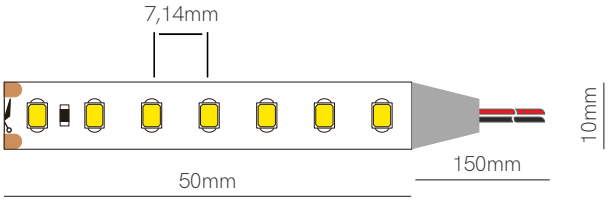



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,1A / 2,5W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 64270 | 110 lm/w | 275 lm/m | 2700K | IP20 |
| | 64300 | 115 lm/w | 287 lm/m | 3000K | IP20 |
| | 64400 | 120 lm/w | 300 lm/m | 4000K | IP20 |

### Accessories



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

CE RoHS

*Available in reel of 10 meters.


Accessories pages 282-293.


5 YEARS WARRANTY | 2,5 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835

New


## Fine 48

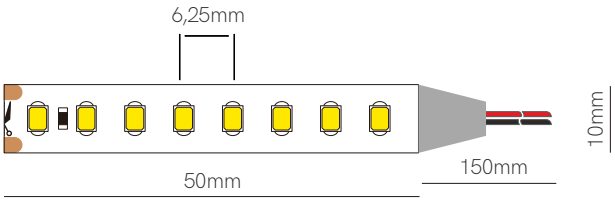


Compatible profiles p. 294.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,2A / 5W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 48220 | 110 lm/w | 550 lm/m | 2200K | IP20 |
| | 48270 | 120 lm/w | 600 lm/m | 2700K | IP20 |
| | 48300 | 130 lm/w | 650 lm/m | 3000K | IP20 |
| | 48400 | 135 lm/w | 675 lm/m | 4000K | IP20 |

## Accessories



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

CE RoHS

*Available in reel of 10 meters.


Accessories pages 282-293.

5 YEARS WARRANTY | 5 W/m | 160 LED/m | CRI ≥90 | III | 24 VDC | 50mm | 2835


DEAD IN DEEP WATER
Little One
NATE PHILBRICK

## Fine 84




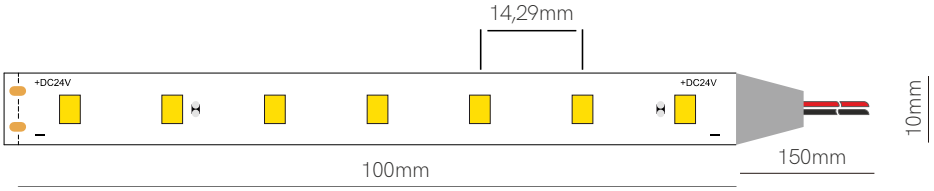



Compatible profiles p. 294.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,2A / 4,8W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 84270 | 95 lm/w | 456 lm/m | 2700K | IP20 |
| | 84300 | 98 lm/w | 470 lm/m | 3000K | IP20 |
| | 84400 | 100 lm/w | 480 lm/m | 4000K | IP20 |
| | 84600 | 102 lm/w | 489 lm/m | 6000K | IP20 |
| | 84275 | 90 lm/w | 432 lm/m | 2700K | IP65 |
| | 84305 | 92 lm/w | 441 lm/m | 3000K | IP65 |
| | 84405 | 95 lm/w | 456 lm/m | 4000K | IP65 |
| | 84605 | 97 lm/w | 465 lm/m | 6000K | IP65 |

### Accessories



End Cap ☐ 20635



End Cap ☐ 20625



Joint 13,8x11,55x3,9mm ☐ 20220



Joint 13,55x11,67x4,7mm ☐ 20120



Joint 24,3x14,6x7,7mm ☐ 20225



Joint 24,3x14,6x7,7mm ☐ 20125



Joint 15,4x11,5x5,7mm ☐ 20991



Joint 21,6x11,5x5,7mm ☐ 20999


CE RoHS


*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS WARRANTY | 4,8 W/m | 70 LED/m | CRI ≥90 | 24 VDC | 100mm | 2835



## Fine 69




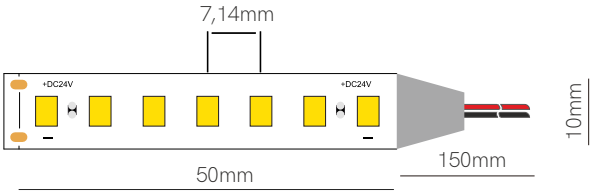



Compatible profiles p. 294.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,4A / 9,6W/m |

| Code | Code | Lumen/w | Lumen/m | CCT | IP |
|---|---|---|---|---|---|
| | 69220 New | 87 lm/w | 835 lm/m | 2200K | IP20 |
| | 69270 | 95 lm/w | 912 lm/m | 2700K | IP20 |
| | 69300 | 98 lm/w | 940 lm/m | 3000K | IP20 |
| | 69400 | 100 lm/w | 960 lm/m | 4000K | IP20 |
| | 69600 | 102 lm/w | 979 lm/m | 6000K | IP20 |
| | 69225 New | 87 lm/w | 835 lm/m | 2200K | IP65 |
| | 69275 | 90 lm/w | 864 lm/m | 2700K | IP65 |
| | 69305 | 92 lm/w | 883 lm/m | 3000K | IP65 |
| | 69405 | 95 lm/w | 912 lm/m | 4000K | IP65 |
| | 69605 | 97 lm/w | 931 lm/m | 6000K | IP65 |

### Accessories



End Cap ☐ 20635



End Cap ☐ 20625



Joint 13,8x11,55x3,9mm ☐ 20220



Joint 13,55x11,67x4,7mm ☐ 20120



Joint 24,3x14,6x7,7mm ☐ 20225



Joint 24,3x14,6x7,7mm ☐ 20125



Joint 15,4x11,5x5,7mm ☐ 20991



Joint 21,6x11,5x5,7mm ☐ 20999


CE RoHS


*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS WARRANTY | 9,6 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835



## Fine 41




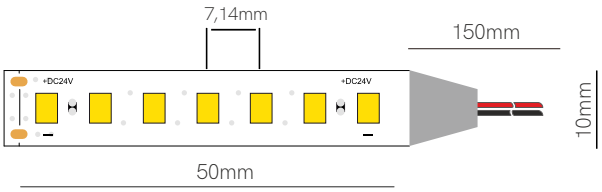



Compatible profiles p. 294.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,6A / 14,4W/m |

| Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|
| 41270 | 95 lm/w | 1.368 lm/m | 2700K | IP20 |
| 41300 | 98 lm/w | 1.411 lm/m | 3000K | IP20 |
| 41400 | 100 lm/w | 1.440 lm/m | 4000K | IP20 |
| 41600 | 102 lm/w | 1.468 lm/m | 6000K | IP20 |
| 41275 | 90 lm/w | 1.296 lm/m | 2700K | IP65 |
| 41305 | 92 lm/w | 1.324 lm/m | 3000K | IP65 |
| 41405 | 95 lm/w | 1.368 lm/m | 4000K | IP65 |
| 41605 | 97 lm/w | 1.396 lm/m | 6000K | IP65 |

Code

### Accessories


End Cap ☐ 20635


End Cap ☐ 20625


Joint 13,8x11,55x3,9mm ☐ 20220


Joint 13,55x11,67x4,7mm ☐ 20120


Joint 24,3x14,6x7,7mm ☐ 20225


Joint 24,3x14,6x7,7mm ☐ 20125


Joint 15,4x11,5x5,7mm ☐ 20991


Joint 21,6x11,5x5,7mm ☐ 20999

CE RoHS


*Available in reel of 5 or 25 meters. Accessories pages 282-293.


5 YEARS WARRANTY | 14,4 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835




## Fine 31

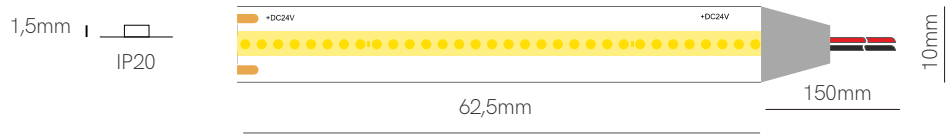


Compatible profiles p. 294.

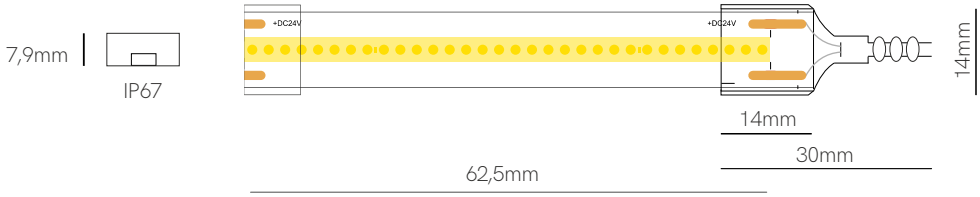

## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,5A / 12W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 31220 New | 85 lm/w | 1.020 lm/m | 2200K | IP20 |
| | 31270 | 95 lm/w | 1.140 lm/m | 2700K | IP20 |
| | 31300 | 98 lm/w | 1.176 lm/m | 3000K | IP20 |
| | 31400 | 100 lm/w | 1.200 lm/m | 4000K | IP20 |
| | 31227 New | 80 lm/w | 960 lm/m | 2200K | IP67 |
| | 31277 | 90 lm/w | 1.080 lm/m | 2700K | IP67 |
| | 31307 | 93 lm/w | 1.116 lm/m | 3000K | IP67 |
| | 31407 | 95 lm/w | 1.140 lm/m | 4000K | IP67 |

## Accessories




End Cap ☐ 32635
End Cap ☐ 32625
Joint ☐ 31709
Joint ☐ 31809
Joint ☐ 31909

CE RoHS

*Available in reel of 5 meters.


Accessories pages 282-293.

5 YEARS WARRANTY | 12 W/m | 512 LED/m | CRI ≥90 | 24 VDC | 62,5mm | COB

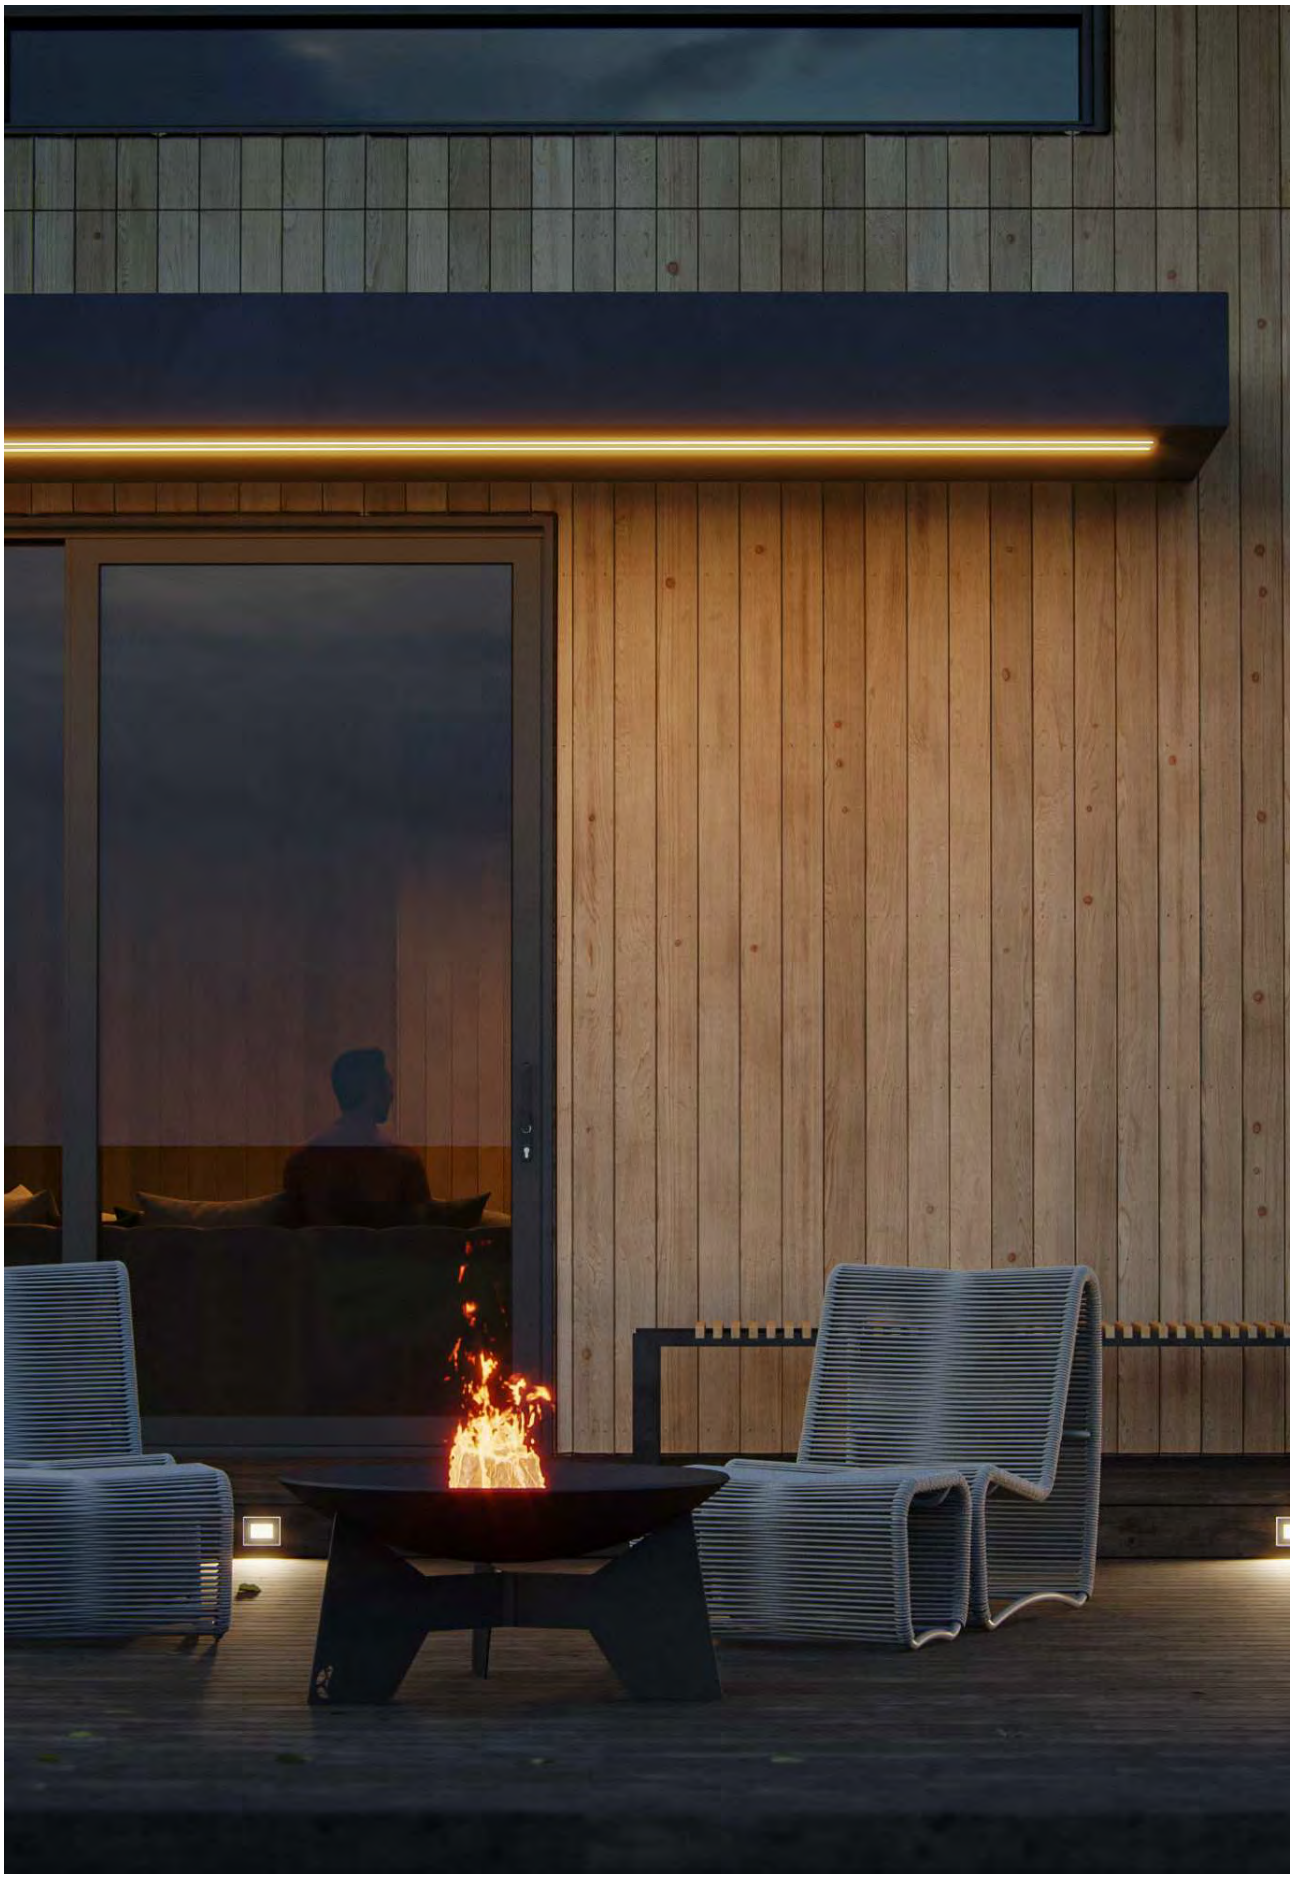

## Fine 61




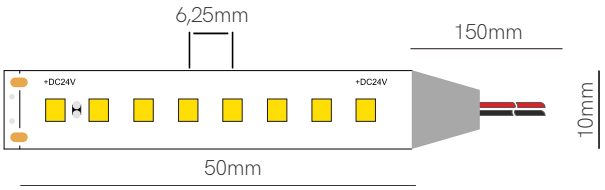



Compatible profiles p. 294.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,62A / 15W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 61270 | 110 lm/w | 1.650 lm/m | 2700K | IP20 |
| | 61300 | 115 lm/w | 1.725 lm/m | 3000K | IP20 |
| | 61400 | 120 lm/w | 1.800 lm/m | 4000K | IP20 |
| | 61600 | 125 lm/w | 1.875 lm/m | 6000K | IP20 |
| | 61275 | 110 lm/w | 1.650 lm/m | 2700K | IP65 |
| | 61305 | 115 lm/w | 1.725 lm/m | 3000K | IP65 |
| | 61405 | 120 lm/w | 1.800 lm/m | 4000K | IP65 |
| | 61605 | 125 lm/w | 1.875 lm/m | 6000K | IP65 |

## Accessories



End Cap ☐ 20635



End Cap ☐ 20625



Joint 13,8x11,55x3,9mm ☐ 20220



Joint 13,55x11,67x4,7mm ☐ 20120



Joint 24,3x14,6x7,7mm ☐ 20225



Joint 24,3x14,6x7,7mm ☐ 20125



Joint 15,4x11,5x5,7mm ☐ 20991



Joint 21,6x11,5x5,7mm ☐ 20999

CE RoHS


*Available in reel of 5 or 25 meters. Accessories pages 282-293.


5 YEARS WARRANTY | 15 W/m | 160 LED/m | CRI ≥90 | III | 24 VDC | 50mm | 2835




## Fine 52

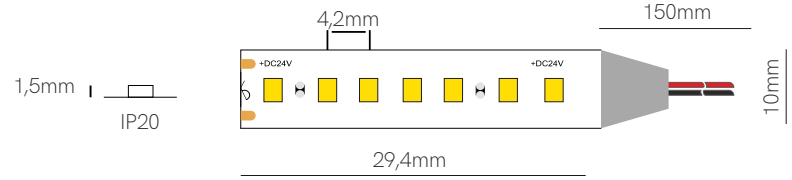


Compatible profiles p. 294.

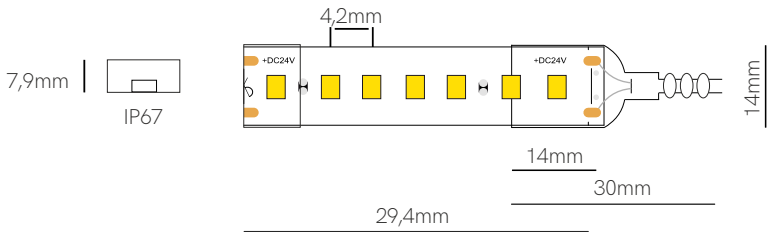

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,91A / 22W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 52270 | 97 lm/w | 2.134 lm/m | 2700K | IP20 |
| | 52300 | 103 lm/w | 2.266 lm/m | 3000K | IP20 |
| | 52400 | 108 lm/w | 2.376 lm/m | 4000K | IP20 |
| | 52600 | 112 lm/w | 2.464 lm/m | 6000K | IP20 |
| | 52277 | 97 lm/w | 2.134 lm/m | 2700K | IP67 |
| | 52307 | 103 lm/w | 2.266 lm/m | 3000K | IP67 |
| | 52407 | 108 lm/w | 2.376 lm/m | 4000K | IP67 |
| | 52607 | 112 lm/w | 2.464 lm/m | 6000K | IP67 |

### Accessories



End Cap
☐ 32635



End Cap
☐ 32625



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120

CE RoHS

*Available in reel of 5 meters.


Accessories pages 282-293.


5 YEARS WARRANTY | 22 W/m | 238 LED/m | CRI ≥90 | 24 VDC | 29,4mm | 2835

New

## Fine 96



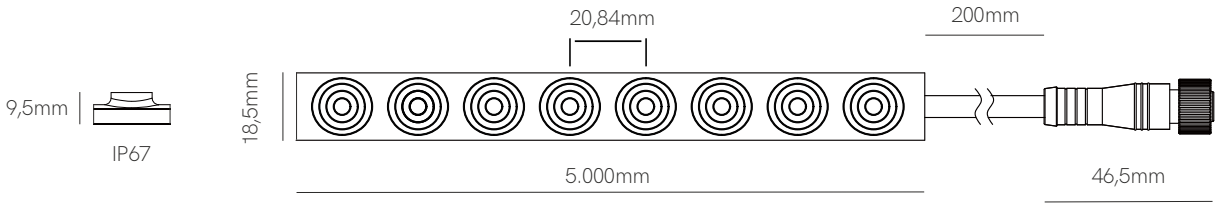


Compatible profiles p. 294.

### Technical Information

| | |
|---|---|
| V / A / W (3.000K / 4.000K) | 24V / 0,75A / 18W/m |
| V / A / W (RGB-W) | 24V / 0,33A / 8W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 96307 | 106 lm/w | 1.915 lm/m | 3000K | IP67 |
| | 96407 | 120 lm/w | 2.167 lm/m | 4000K | IP67 |
| | 96477 | 67,5 lm/w | 540 lm/m | RGB-W 3.000K | IP67 |

### Accessories


Clip
☐ 96119


Clip
☐ 96380


Clip
☐ 96330


Clip
☐ 96350


ADH
☐ 96111


Extension cable
☐ 96946-M2
☐ 96946-M4
☐ 96946-H2
☐ 96946-H4


Extension cable
☐ 96920-2
☐ 96920-4

CE RoHS


*Available in reel of 5 meters. Accessories pages 282-293.


3 YEARS WARRANTY | 18/8 W/m | 48 LED/m | CRI ≥90 | 24 VDC | 2835


New

## Fine 76

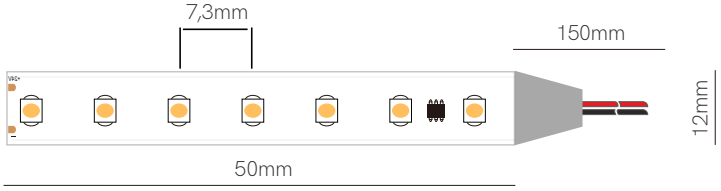



Compatible profiles p. 294.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,62A / 15W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 76300 | 120 lm/w | 1.800 lm/m | 3000K | IP20 |
| | 76400 | 128 lm/w | 1.920 lm/m | 4000K | IP20 |

CE RoHS


*Available in reel of 5 meters.


Accessories pages 282-293.

5 YEARS WARRANTY | 15 W/m | 126 LED/m | CRI ≥80 | III | 24 VDC | 50mm | 2835 LENS

## Fine 56



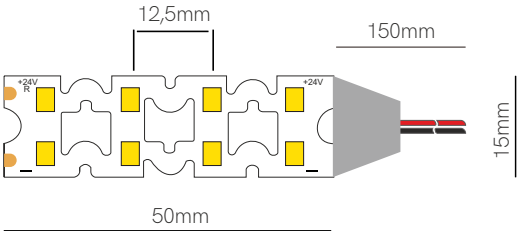


Compatible profiles p. 294.

### Technical Information

| V / A / W | 24V / 0,91A / 22W/m |
|---|---|

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 56270 | 155 lm/w | 3.410 lm/m | 2700K | IP20 |
| | 56300 | 160 lm/w | 3.520 lm/m | 3000K | IP20 |
| | 56400 | 170 lm/w | 3.740 lm/m | 4000K | IP20 |
| | 56360 | 130 lm/w | 2.860 lm/m | CCT | IP20 |

CE RoHS


*Available in reel of 5 meters.


Accessories pages 282-293.

5 YEARS WARRANTY | 22 W/m | 160 LED/m | CRI ≥80 | 24 VDC | 50 mm | 2835


## Fine 55



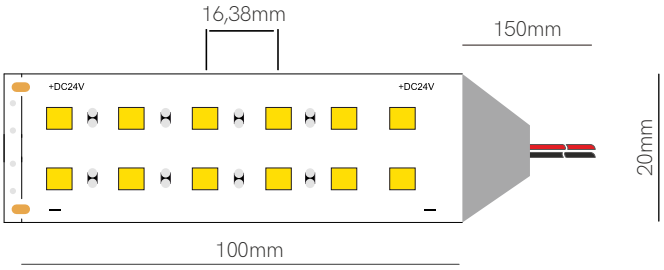


Compatible profiles p. 294.



### Technical Information

| V / A / W | 24V / 1A / 24W/m |
|---|---|

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 55270 | 80 lm/w | 1.920 lm/m | 2700K | IP20 |
| | 55300 | 83 lm/w | 1.992 lm/m | 3000K | IP20 |
| | 55400 | 86 lm/w | 2.064 lm/m | 4000K | IP20 |

CE RoHS

*Available in reel of 5 meters.


Accessories pages 282-293.


5 YEARS WARRANTY | 24 W/m | 120 LED/m | CRI ≥90 | 24 VDC | 100mm | 5050


GROUND ZERO
Helvetica
1984
WAR PORN
THE BRAND GAP


## Fine 49

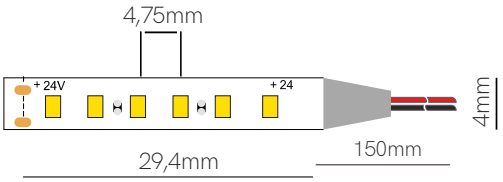


Compatible profiles p. 294.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,4A / 10W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 49270 | 71 lm/w | 710 lm/m | 2700K | IP20 |
| | 49300 | 74 lm/w | 740 lm/m | 3000K | IP20 |
| | 49400 | 77 lm/w | 770 lm/m | 4000K | IP20 |
| | 49600 | 74 lm/w | 740 lm/m | 6000K | IP20 |

## Accessories



Joint
☐ 20049



Joint
☐ 20249

CE RoHS


*Available in reel of 5 meters.


Accessories pages 282-293.

5 YEARS WARRANTY | 10 W/m | 204 LED/m | CRI ≥90 | III | 24 VDC | 29,4mm | 2216

## Fine 51

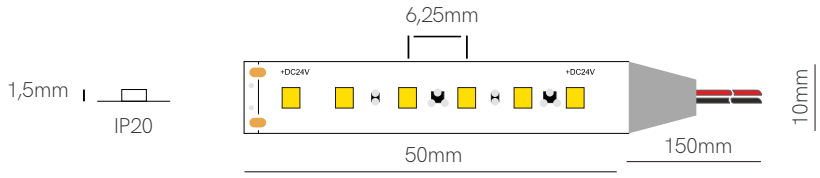


Compatible profiles p. 294.
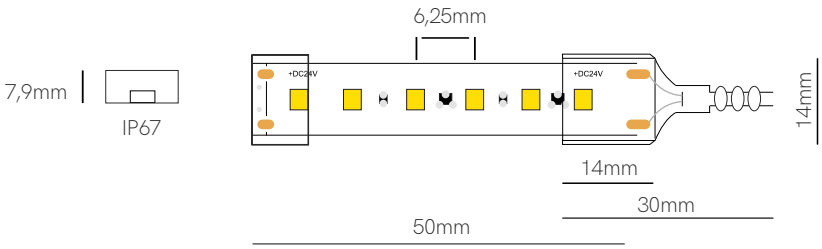
## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,4A / 9,6W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 51270 | 100 lm/w | 960 lm/m | 2700K | IP20 |
| | 51300 | 100 lm/w | 960 lm/m | 3000K | IP20 |
| | 51400 | 100 lm/w | 960 lm/m | 4000K | IP20 |
| | 51600 | 100 lm/w | 960 lm/m | 6000K | IP20 |
| | 51277 | 100 lm/w | 960 lm/m | 2700K | IP67 |
| | 51307 | 100 lm/w | 960 lm/m | 3000K | IP67 |
| | 51407 | 100 lm/w | 960 lm/m | 4000K | IP67 |
| | 51607 | 100 lm/w | 960 lm/m | 6000K | IP67 |

## Accessories



End Cap
32635



End Cap
32625

CE RoHS


*Available in reel of 20 meters.

Accessories pages 282-293.


5 YEARS WARRANTY | 9,6 W/m | 120 LED/m | CRI ≥90 | 24 VDC | ULTRALONG | 50mm | 2835

## Fine 32 N



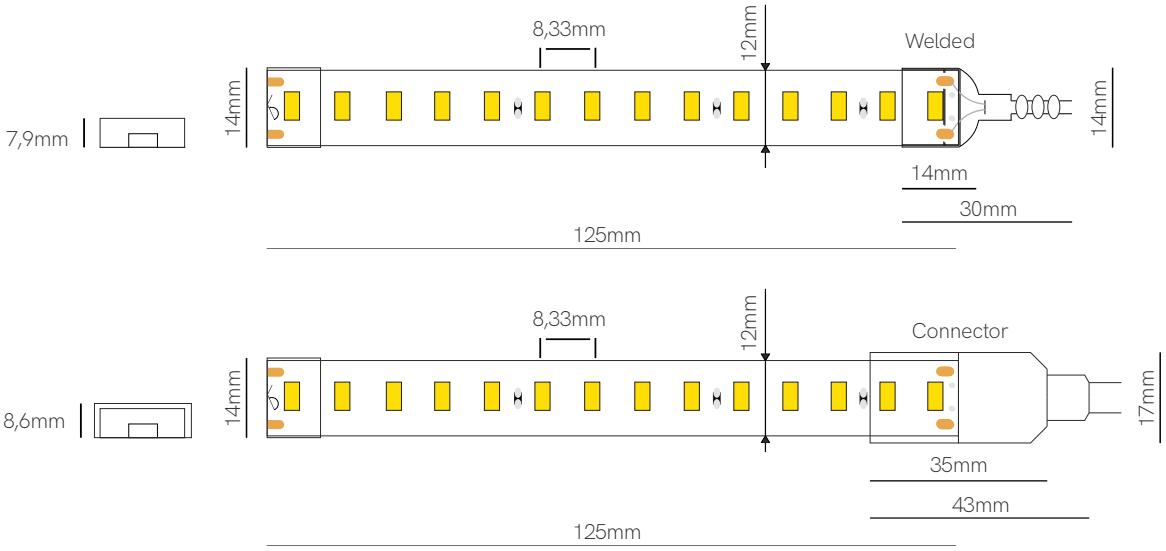


Compatible profiles p. 294.



### Technical Information

| | |
|---|---|
| V / A / W | 220V / 0,068A / 15W/m |

| Code | Code | Lumen/w | Lumen/m | CCT | IP |
|---|---|---|---|---|---|
| | 32275-N | 100 lm/w | 1.500 lm/m | 2700K | IP65 |
| | 32305-N | 105 lm/w | 1.575 lm/m | 3000K | IP65 |
| | 32405-N | 110 lm/w | 1.650 lm/m | 4000K | IP65 |
| | 32605-N | 110 lm/w | 1.650 lm/m | 6000K | IP65 |

### Accessories



End Cap ☐ 32635



End Cap ☐ 32625



Connector kit ☐ 32699



Join 180° ☐ 32899



Join 90° ☐ 32499



Clip ☐ 32900



Joint ☐ 32299


CE RoHS


*Available in reel of 5 or 50 meters. Accessories pages 282-293.


3 YEARS WARRANTY | 15 W/m | 112 LED/m | CRI ≥80 | 220/240 VAC | 125mm | TRIAC DIMM | 2835



## Fine 44



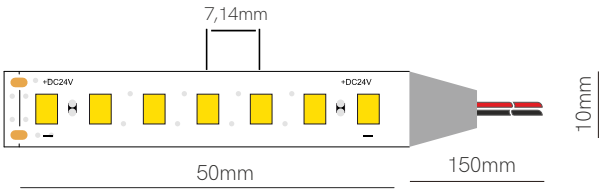


MEAT STRIP


FISH STRIP


FRUIT STRIP


BREAD STRIP

Compatible profiles p. 294.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,6A / 14,4W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 44370 | 85lm/w | 1.224 lm/m | MEAT (3.700K) | IP20 |
| | 44110 | 95 lm/w | 1.368 lm/m | FISH (11.600K) | IP20 |
| | 44500 | 90 lm/w | 1.296 lm/m | FRUIT (5.000K) | IP20 |
| | 44270 | 80 lm/w | 1.152 lm/m | BREAD (2.700K) | IP20 |

## Accessories


Joint
13,8x11,55x3,9mm
☐ 20220


Joint
13,55x11,67x4,7mm
☐ 20120


Joint
15,4x11,5x5,7mm
☐ 20991


Joint
21,6x11,5x5,7mm
☐ 20999

CE RoHS

*Available in reel of 5 meters.

Accessories pages 282-293.

5 YEARS WARRANTY | 14,4 W/m | 140 LED/m | CRI 75/97 | 24 VDC | 50mm | 2835








MONTE CRISTO
SHADOWS
IcCurry
NIC PHOTOGRAPHS

New


## Fine 63

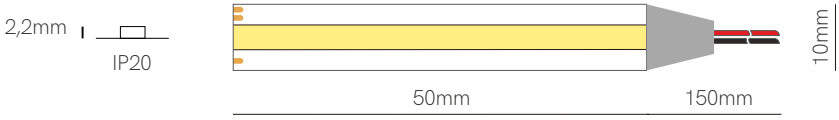


Compatible profiles p. 294.

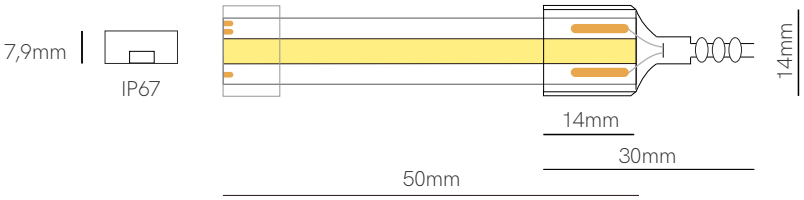

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,79A / 19W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 63360 | 89-95 lm/w | 850-1.750 lm/m | 2.700-6.000K | IP20 |
| | 63367 | 89-95 lm/w | 850-1.750 lm/m | 2.700-6.000K | IP67 |

### Accessories



End Cap
32635



End Cap
32625

CE RoHS


*Available in reel of 5 meters.


Accessories pages 282-293.

5 YEARS WARRANTY | 19 W/m | 640 LED/m | CRI ≥90 | III | 24 VDC | 50mm | COB

## Fine 36

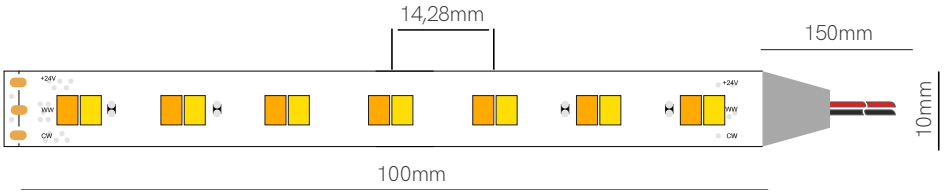


Compatible profiles p. 294.

## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,5A / 12W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 36360 | 100 lm/w | 1.200 lm/m | 2.700-5.000K | IP20 |

## Accessories



Joint
13,57x11,63x3,5mm
20230



Joint
13,57x11,63x4,7mm
20130

CE RoHS


*Available in reel of 5 meters.

Accessories pages 282-293.

5 YEARS WARRANTY | 12 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 100mm | 2835

## Fine 42




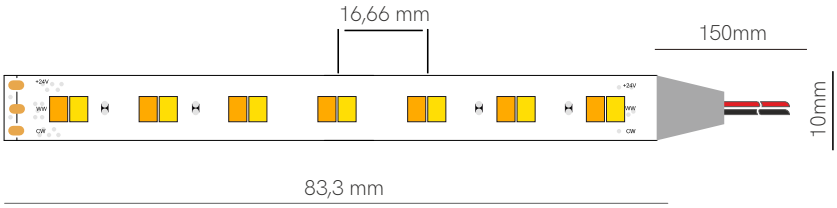



Compatible profiles p. 294.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,8A / 19,2W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 42360 | 90 lm/w | 1.728 lm/m | 1.800-4.000K | IP20 |
| | 42365 | 90 lm/w | 1.728 lm/m | 1.800-4.000K | IP65 |

### Accessories



End Cap
☐ 20635



End Cap
☐ 20625



Joint
13,57x11,63x3,5mm
☐ 20230



Joint
13,57x11,63x4,7mm
☐ 20130



Joint
24,3x14,6x7,7mm
☐ 20235



Joint
24,3x14,6x7,7mm
☐ 20135

CE RoHS


*Available in reel of 5 or 25 meters. Accessories pages 282-293.


5 YEARS WARRANTY | 19,2 W/m | 168 LED/m | CRI ≥90 | 24 VDC | 83,3mm | 2835




New

## Fine 54

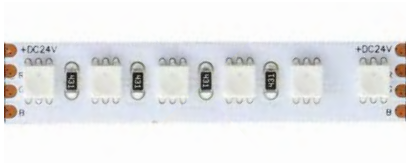

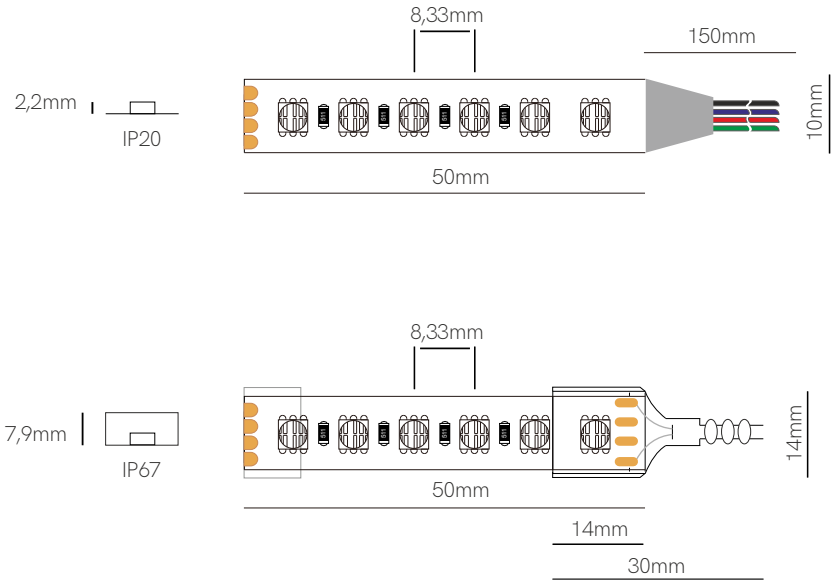


Compatible profiles p. 294.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,6A / 14W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 54460 | 50 lm/w | 700 lm/m | RGB | IP20 |
| | 54467 | 45 lm/w | 630 lm/m | RGB | IP67 |

CE RoHS

*Available in reel of 5 meters.

Accessories pages 282-293.


5 YEARS WARRANTY | 14 W/m | 120 LED/m | 24 VDC | III | 50mm | 4040




Personal training room, Collbató (Spain).

## Fine 46




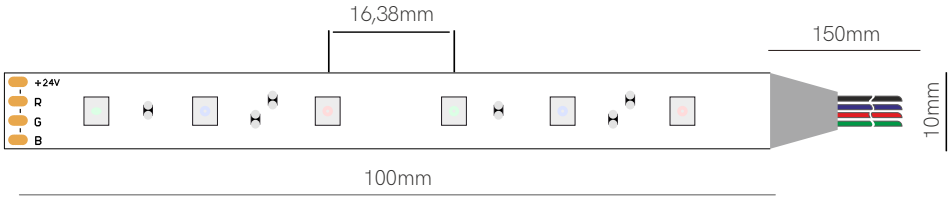



Compatible profiles p. 294.



Technical Information

| V / A / W | 24V / 0,6A / 14,4W/m |
|---|---|

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 46460 | 38 lm/w | 547 lm/m | RGB | IP20 |
| | 46465 | 41 lm/w | 590 lm/m | RGB | IP65 |

Accessories



End Cap
☐ 20635



End Cap
☐ 20625



Joint
13,54x11,7x4,1mm
☐ 20240



Joint
13,56x13,46x4,7mm
☐ 20140



Joint
24,3x14,6x7,68mm
☐ 20245



Joint
24,3x14,6x7,68mm
☐ 20145

CE RoHS


*Available in reel of 5 or 25 meters. Accessories pages 282-293.


5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC | III | 50mm | 5050




## Fine 43



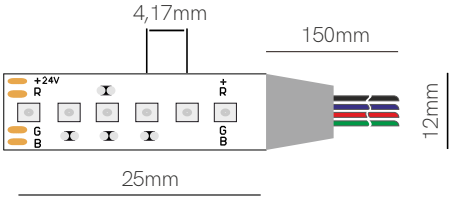


Compatible profiles p. 294.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,8A / 19,2W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 43430 | 90 lm/w | 1.728 lm/m | RGB | IP20 |

CE RoHS


*Available in reel of 5 meters.


Accessories pages 282-293.

3 YEARS WARRANTY | 19,2 W/m | 240 LED/m | 24 VDC | 25mm | 3535


## Fine 50



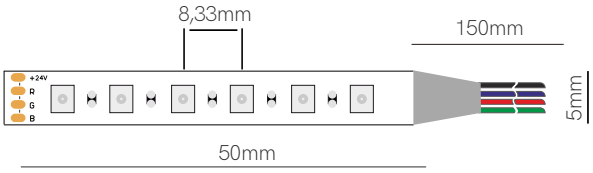



Compatible profiles p. 294.

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,4A / 9,6W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 50460 | 58 lm/w | 556 lm/m | RGB | IP20 |

CE RoHS


*Available in reel of 5 meters.


Accessories pages 282-293.

3 YEARS WARRANTY | 9,6 W/m | 120 LED/m | 24 VDC | 50mm | 2835


## Fine 66

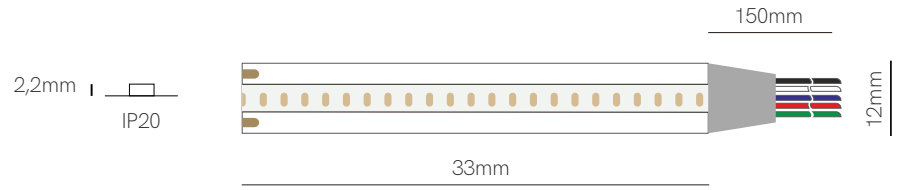


Compatible profiles p. 294.

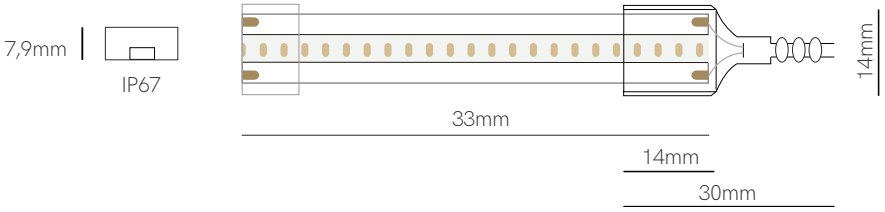

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,83A / 20W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 66470 | 172 lm/w | 830 lm/m | RGB-W 2.700K | IP20 |
| | 66477 | 172 lm/w | 830 lm/m | RGB-W 2.700K | IP67 |

### Accessories



Joint
☐ 20066



Joint
☐ 20266

CE RoHS


*Available in reel of 5 meters.


Accessories pages 282-293.

5 YEARS WARRANTY | 20 W/m | 840 LED/m | 24 VDC | 33mm | CSP


## Fine 47



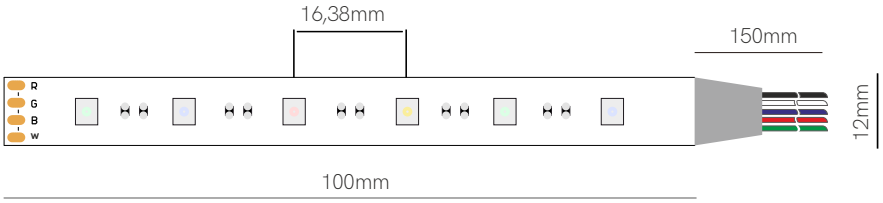



Compatible profiles p. 294.

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,6A / 14,4W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 47430 | 18-60 lm/w | 260-864 lm/m | RGB-W 3.000K | IP20 |
| | 47440 New | 18-60 lm/w | 260-864 lm/m | RGB-W 4.000K | IP20 |

### Accessories



Joint
13,5x13,73x4,2mm
☐ 20150



Joint
13,5x13,55x4,8mm
☐ 20250

CE RoHS

*Available in reel of 5 or 25 meters.


Accessories pages 282-293.


5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC | 100mm | 5050

New

## Fine 71



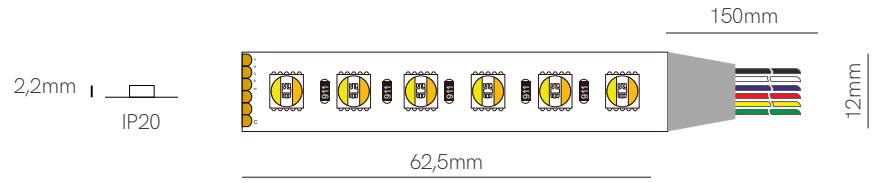

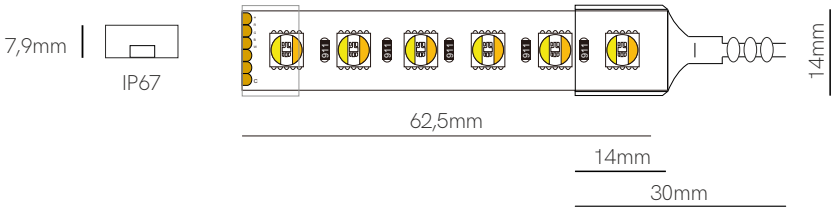
Compatible profiles p. 294

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,875A / 21W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 71470 | 29-117 lm/w | 70-1.555 lm/m | RGB-WW 2.700K 6000K | IP20 |
| | 71477 | 29-117 lm/w | 70-1.555 lm/m | RGB-WW 2.700K 6000K | IP67 |

CE RoHS

*Available in reel of 5 meters.


Accessories pages 282-293.

5 YEARS WARRANTY | 21 W/m | 96 LED/m | 24 VDC | 62,5mm | 5050



## Fine 45




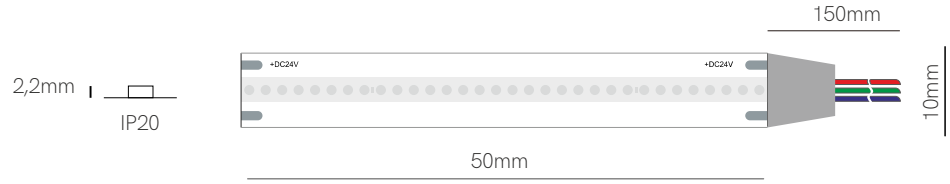



Compatible profiles p. 294.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,41A / 10W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 45220 | 15 | 150 | RED | IP20 |
| | 45310 | 91 | 910 | GREEN | IP20 |
| | 45520 | 13 | 130 | BLUE | IP20 |
| | 45227 New | 15 | 150 | RED | IP67 |
| | 45317 New | 91 | 910 | GREEN | IP67 |
| | 45527 New | 13 | 130 | BLUE | IP67 |

### Accessories



End Cap ☐ 32635 | End Cap ☐ 32625 | Clip ☐ 31709 | Clip ☐ 31809 | Joint ☐ 31909

CE RoHS

*Available in reel of 10 meters.

Accessories pages 282-293.

5 YEARS WARRANTY | 10 W/m | 480 LED/m | 24 VDC | 50 mm | CSP

# Running led strip

▶ VIDEO

Running is the new digital LED strip that provides a new generation of lighting, simulating the movement of light known as running or chase effect, along the strip. Based on pixel by pixel control, its LEDs turn on and off sequentially, generating a displacement of light that causes a more pleasant and dynamic visual experience in space.
We have 2 controllers, SP6329 RF control with 14 different scenes and speed control, and another controller SP9812 developed by BENEITO & FAURE, standard push button control, with which it is possible to adjust the speed of the scenes, the direction in one direction or another of the light and the intensity. Our system is very versatile, adapting to the size of the installations, it can control up to 1024 pixels.






Running es la nueva tira de LED digital que proporciona una iluminación de nueva generación, simulando el movimiento de la luz conocido como efecto running o chase, a lo largo de la tira. Basado en el control pixel a pixel, sus LEDs se encienden y apagan secuencialmente, generando un desplazamiento de la luz que provoca una experiencia visual más agradable y dinámica en el espacio. Disponemos de 2 controladores, SP6329 control RF con 14 escenas diferentes y control de velocidad, y otro controlador SP9812 desarrollado por BENEITO & FAURE, control por pulsador estándar, con el cual es posible ajustar la velocidad de las escenas, la dirección en un sentido u otro de la luz y la intensidad. Nuestro sistema es muy versátil, adaptándose al tamaño de las instalaciones, puede controlar hasta 1024 pixels.







New

## Fine running

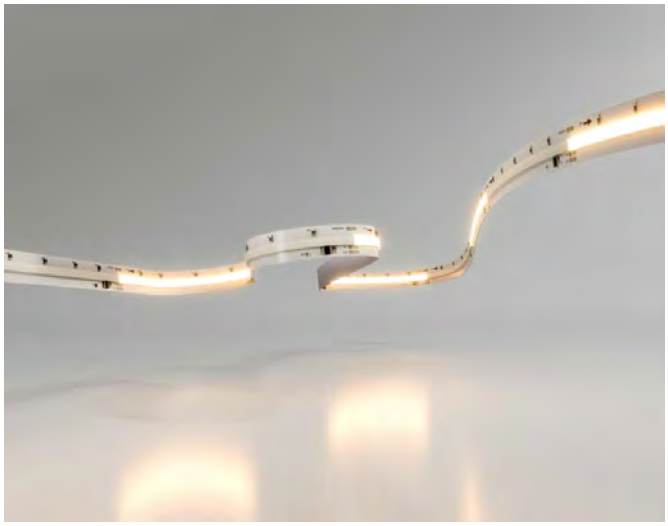

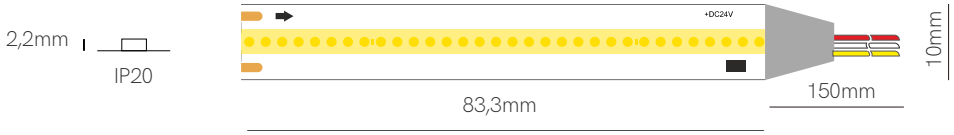


Compatible profiles p. 294.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,5A / 12W/m |
| IC | WS2811 (12px/m) |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | SP1300 | 79 lm/w | 950 lm/m | 3000K | IP20 |
| | SP1400 | 87 lm/w | 1.050 lm/m | 4000K | IP20 |

## Control

| Code | Version | Power Max | Pixels Max | VDC IN |
|---|---|---|---|---|
| SP-9812 | Controller | - | - | 24 VDC |
| SP-6329 | Running Touch Controller | 8A | 1.024 | 24 VDC |

CE RoHS


*Available in reel of 5 meters.
Accessories pages 282-293.


3 YEARS WARRANTY | 12 W/m | 360 LED/m | CRI ≥90 | III | 24 VDC | 83,3mm | SPI | COB

New

## Fine SPI-2



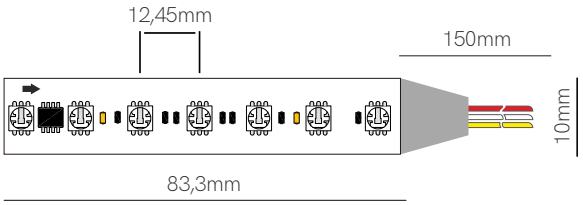


Compatible profiles p. 294.

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,58A / 14W/m |
| IC | SM16703PB (12px/m) |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | SP2430 | 37 lm/w | 515 lm/m | RGB | IP20 |

CE RoHS


*Available in reel of 5 meters.
Accessories pages 282-293.


3 YEARS WARRANTY | 14 W/m | 84 LED/m | III | 24 VDC | 83,3mm | SPI | 5050

New

## Fine SPI-3



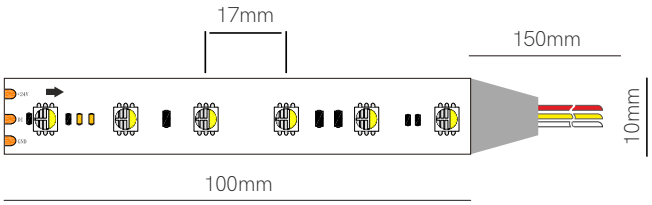


Compatible profiles p. 294.

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,45A / 11W/m |
| IC | SK6812 12MA (10px/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | SP3470 | 51 lm/w | 561 lm/m | RGB-W 3.000K | IP20 |

CE RoHS


*Available in reel of 5 meters.
Accessories pages 282-293.


3 YEARS WARRANTY | 11 W/m | 60 LED/m | III | 24 VDC | 100mm | SPI | 5050



New

## Fine SPI-4

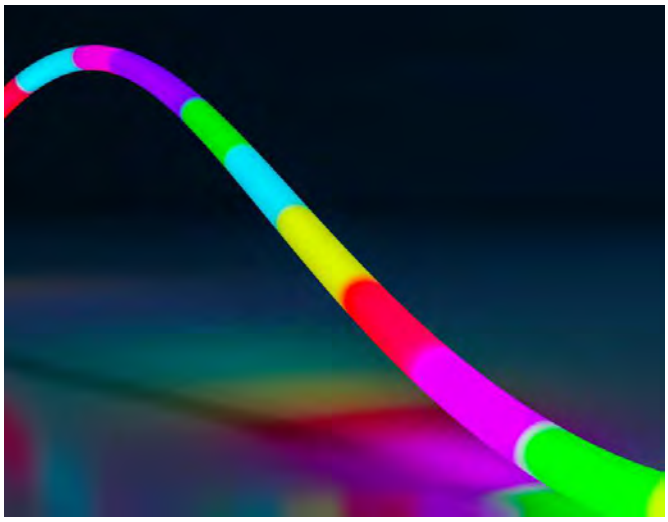

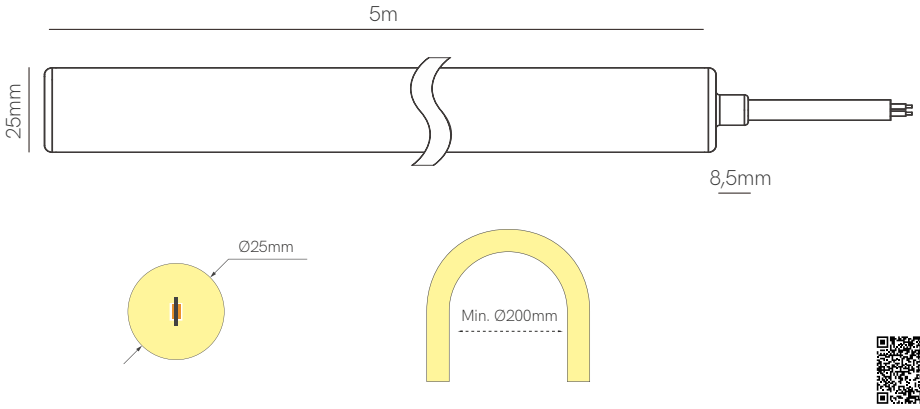


## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,83A / 20W/m |
| IC | SK6812 12MA (12px/m) |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | SP4437 | 12,5 lm/w | 250 lm/m | RGB | IP67 |

## Accessories



End Cap
☐ 25627

End Cap
☐ 25657-1
■ 25657-2
☐ 25657

Initial roof Cap
☐ 25997-1
■ 25997-2
☐ 25997

Clip
☐ 25530

Initial Cap
☐ 25667-1
■ 25667-2
☐ 25667

Initial Cap
☐ 25637

Tube
☐ 25450

Joint with base
☐ 25227-1
■ 25227-2
☐ 25227

Suspension kit
☐ 25887


CE RoHS


*Available in reel of 5 meters. Accessories pages 282-293.

5 YEARS WARRANTY | 20 W/m | 168 LED/m | 24 VDC | 83,3mm | SPI | 5050

New

## Fine DMX-4

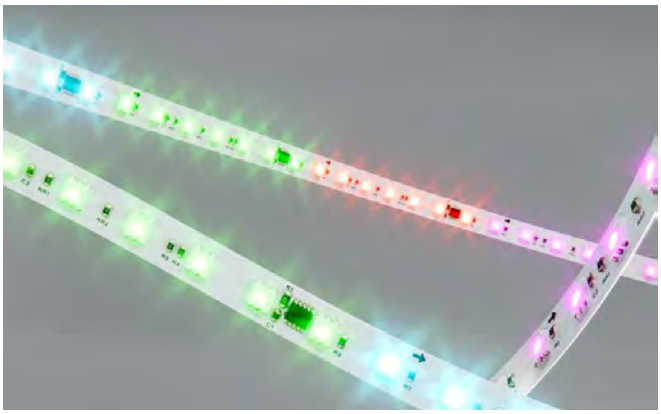

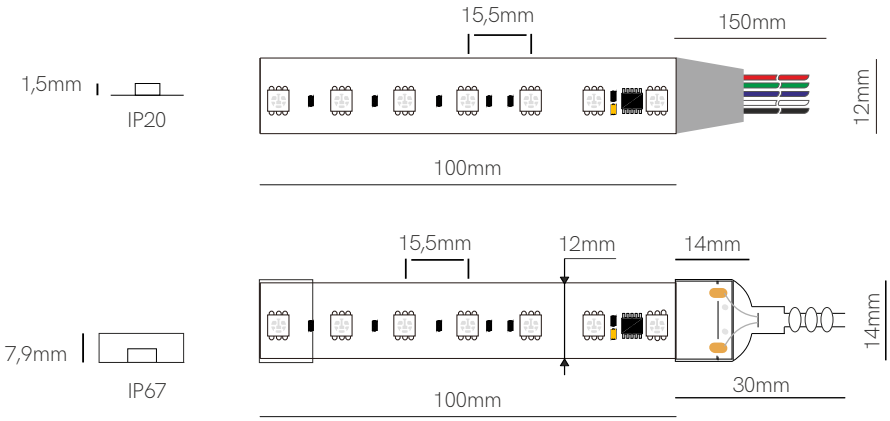


Compatible profiles p. 294.

## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,5A / 12W/m |
| IC | SM18512PS (10px/m) |

| | Code | Lumen/w | Lumen/m | CCT | IP |
|---|---|---|---|---|---|
| Code | DM4430 | 42 lm/w | 503 lm/m | RGB | IP20 |
| | DM4437 | 42 lm/w | 503 lm/m | RGB | IP67 |

## Accessories



End Cap ☐ 32635



End Cap ☐ 32625

CE RoHS

*Available in reel of 5 meters.


Accessories pages 282-293.

3 YEARS WARRANTY | 12 W/m | 70 LED/m | 24 VDC | 100mm | DMX | 5050

New

## Fine DMX-5



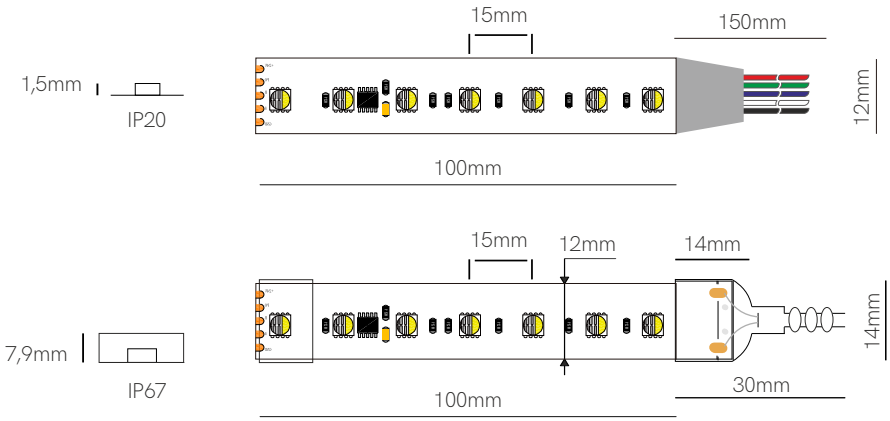


Compatible profiles p. 294.

## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,7A / 17W/m |
| IC | SM18512PS (10px/m) |

| | Code | Lumen/w | Lumen/m | CCT | IP |
|---|---|---|---|---|---|
| Code | DM5470 | 50 lm/w | 861 lm/m | RGB-W 3.000K | IP20 |
| | DM5477 | 50 lm/w | 861 lm/m | RGB-W 3.000K | IP67 |

## Accessories



End Cap
32635



End Cap
32625

CE RoHS

*Available in reel of 5 meters.

Accessories pages 282-293.

3 YEARS WARRANTY | 12 W/m | 70 LED/m | 24 VDC | 100mm | DMX | 5050



# NEON IP 67

## LED Strips

Beneito Faure's 24V flexible neon strips allow you to choose between different light powers, protections, densities and lengths, while maintaining the safety and durability of low voltage installations.

The lighting needs for the nautical industry require a customized and high-performance solution.

All Beneito Faure neon strips have a certificate of resistance to corrosion, resistance to saline alkalis and anti-UV resistance, in addition to an ingress protection of IP67.




Las tiras flexibles neón de Beneito Faure de 24V permiten elegir entre diferentes rendimientos lumínicos, protecciones, densidades y longitudes, manteniendo la seguridad y la vida útil de las instalaciones de baja tensión.


Las necesidades de iluminación para el sector náutico requieren una solución personalizada y de alto rendimiento.


Todas las tiras neón de Beneito Faure tienen el certificado de resistencia a la corrosión, resistencia a los álcalis salinos y resistencia anti UV, además de un índice de protección lumínico de IP67.

## Fine 25



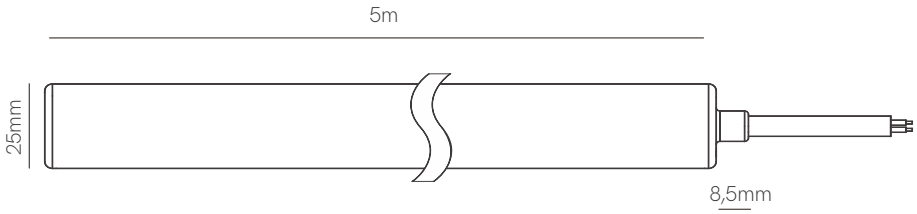


### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,83A / 20W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 25247 | 60 lm/w | 1.200 lm/m | 2400K | IP67 |
| | 25277 | 65 lm/w | 1.300 lm/m | 2700K | IP67 |
| | 25307 | 69 lm/w | 1.380 lm/m | 3000K | IP67 |
| | 25407 | 73 lm/w | 1.460 lm/m | 4000K | IP67 |
| | 25367 | 70 lm/w | 1.400 lm/m | 2700K-6500K | IP67 |
| | 25467 | 41 lm/w | 820 lm/m | RGB | IP67 |

*Available in reels of 1,5m, 3m and 5 meters.

### Accessories



End Cap
☐ 25627



End Cap
☐ 25657-1
■ 25657-2
☐ 25657



Initial roof Cap
☐ 25997-1
■ 25997-2
☐ 25997



Clip
☐ 25530



Initial Cap
☐ 25667-1
■ 25667-2
☐ 25667



Initial Cap
☐ 25637



Tube
☐ 25450



Joint with base
☐ 25227-1
■ 25227-2
☐ 25227



Suspension kit
☐ 25887

CE RoHS

Accessories pages 282-293.


5 YEARS WARRANTY | 20 W/m | 320 LED/m | 480 LED/m (CCT) | 240 LED/m (RGB) | 24 VDC | 10mm / 50mm (CCT-RGB) | 2835 | 4040 (RGB) | CRI ≥90





FITSEVENELEVEN®, Club Frankfurt Airport.



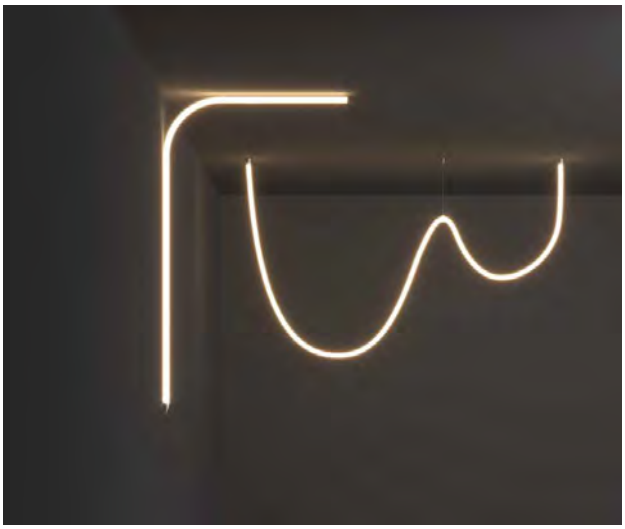











## Fine 70




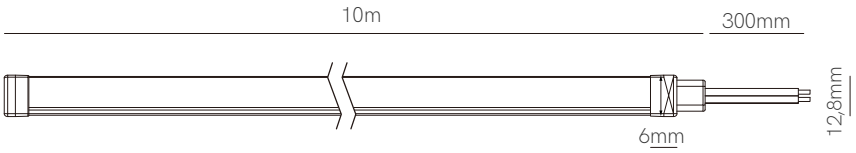








### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,20A / 5W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 70277 | 31 lm/w | 155 lm/m | 2700K | IP67 |
| | 70307 | 35 lm/w | 175 lm/m | 3000K | IP67 |
| | 70407 | 37 lm/w | 185 lm/m | 4000K | IP67 |
| | 70437 | 15 lm/w | 75 lm/m | RGB | IP67 |

### Accessories



End Cap ☐ 70627
End Cap ☐ 70967
End Cap ☐ 70637
Clip 19,7x8x13mm ☐ 70330
Clip 1000x8x13mm ☐ 70119
Clip 1000x8,5x12,5mm ☐ 70350

CE RoHS

*Available in reel of 10 meters.

Accessories pages 282-293.

5 YEARS WARRANTY | 5 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | 50mm | 2835 | 4040 (RGB) | CRI ≥90










## Fine 72



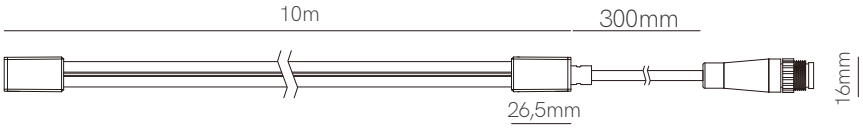





### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,41A / 10W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 72277 | 59 lm/w | 590 lm/m | 2700K | IP67 |
| | 72307 | 62 lm/w | 620 lm/m | 3000K | IP67 |
| | 72407 | 65 lm/w | 650 lm/m | 4000K | IP67 |
| | 72437 | 26 lm/w | 260 lm/m | RGB | IP67 |

### Accessories



End Cap
- ☐ 72967-L2
- ☐ 72967-L4



End Cap
- ☐ 72967-2
- ☐ 72967-4



End Cap
- ☐ 72627-2
- ☐ 72627-4



End Cap
- ☐ 72637



Clip 20,2x16,8x12,5mm
- ☐ 77530



Clip 1000x19,2x17,8mm
- ☐ 77519



Clip 1000x26,4x18mm
- ☐ 77350



Extension cable
- ■ 77946 (Mono)
- ■ 77920 (RGB)

CE RoHS


*Available in reel of 10 meters. Accessories pages 282-293.

5 YEARS WARRANTY | 10 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | 50mm / 62,5mm (RGB) | 2835 | 4040 (RGB) | CRI ≥90




## Fine 74



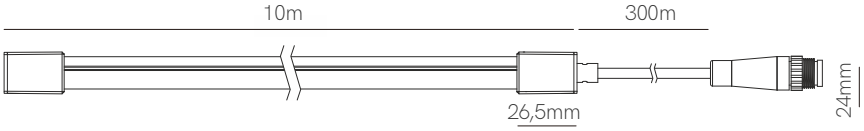











### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,41A / 10W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 74277 | 59 lm/w | 590 lm/m | 2700K | IP67 |
| | 74307 | 62 lm/w | 620 lm/m | 3000K | IP67 |
| | 74407 | 65 lm/w | 650 lm/m | 4000K | IP67 |
| | 74437 | 22 lm/w | 220 lm/m | RGB | IP67 |

### Accessories


End Cap
- 74967-L2
- 74967-L4


End Cap
- 74967-2
- 74967-4


End Cap
- 74627-2
- 74627-4


End Cap
- 74637


Clip 20,2x16,8x12,5mm
- 77330


Clip 1000x19,2x17,8mm
- 77119



Clip 1000x26,4x18mm
- 77350


Extension cable
- 77946 (Mono)
- 77920 (RGB)

CE RoHS

*Available in reel of 10 meters. Accessories pages 282-293.

5 YEARS WARRANTY | 10 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | 50mm / 55,5mm (RGB) | 2835 | 4040 (RGB) | CRI ≥90

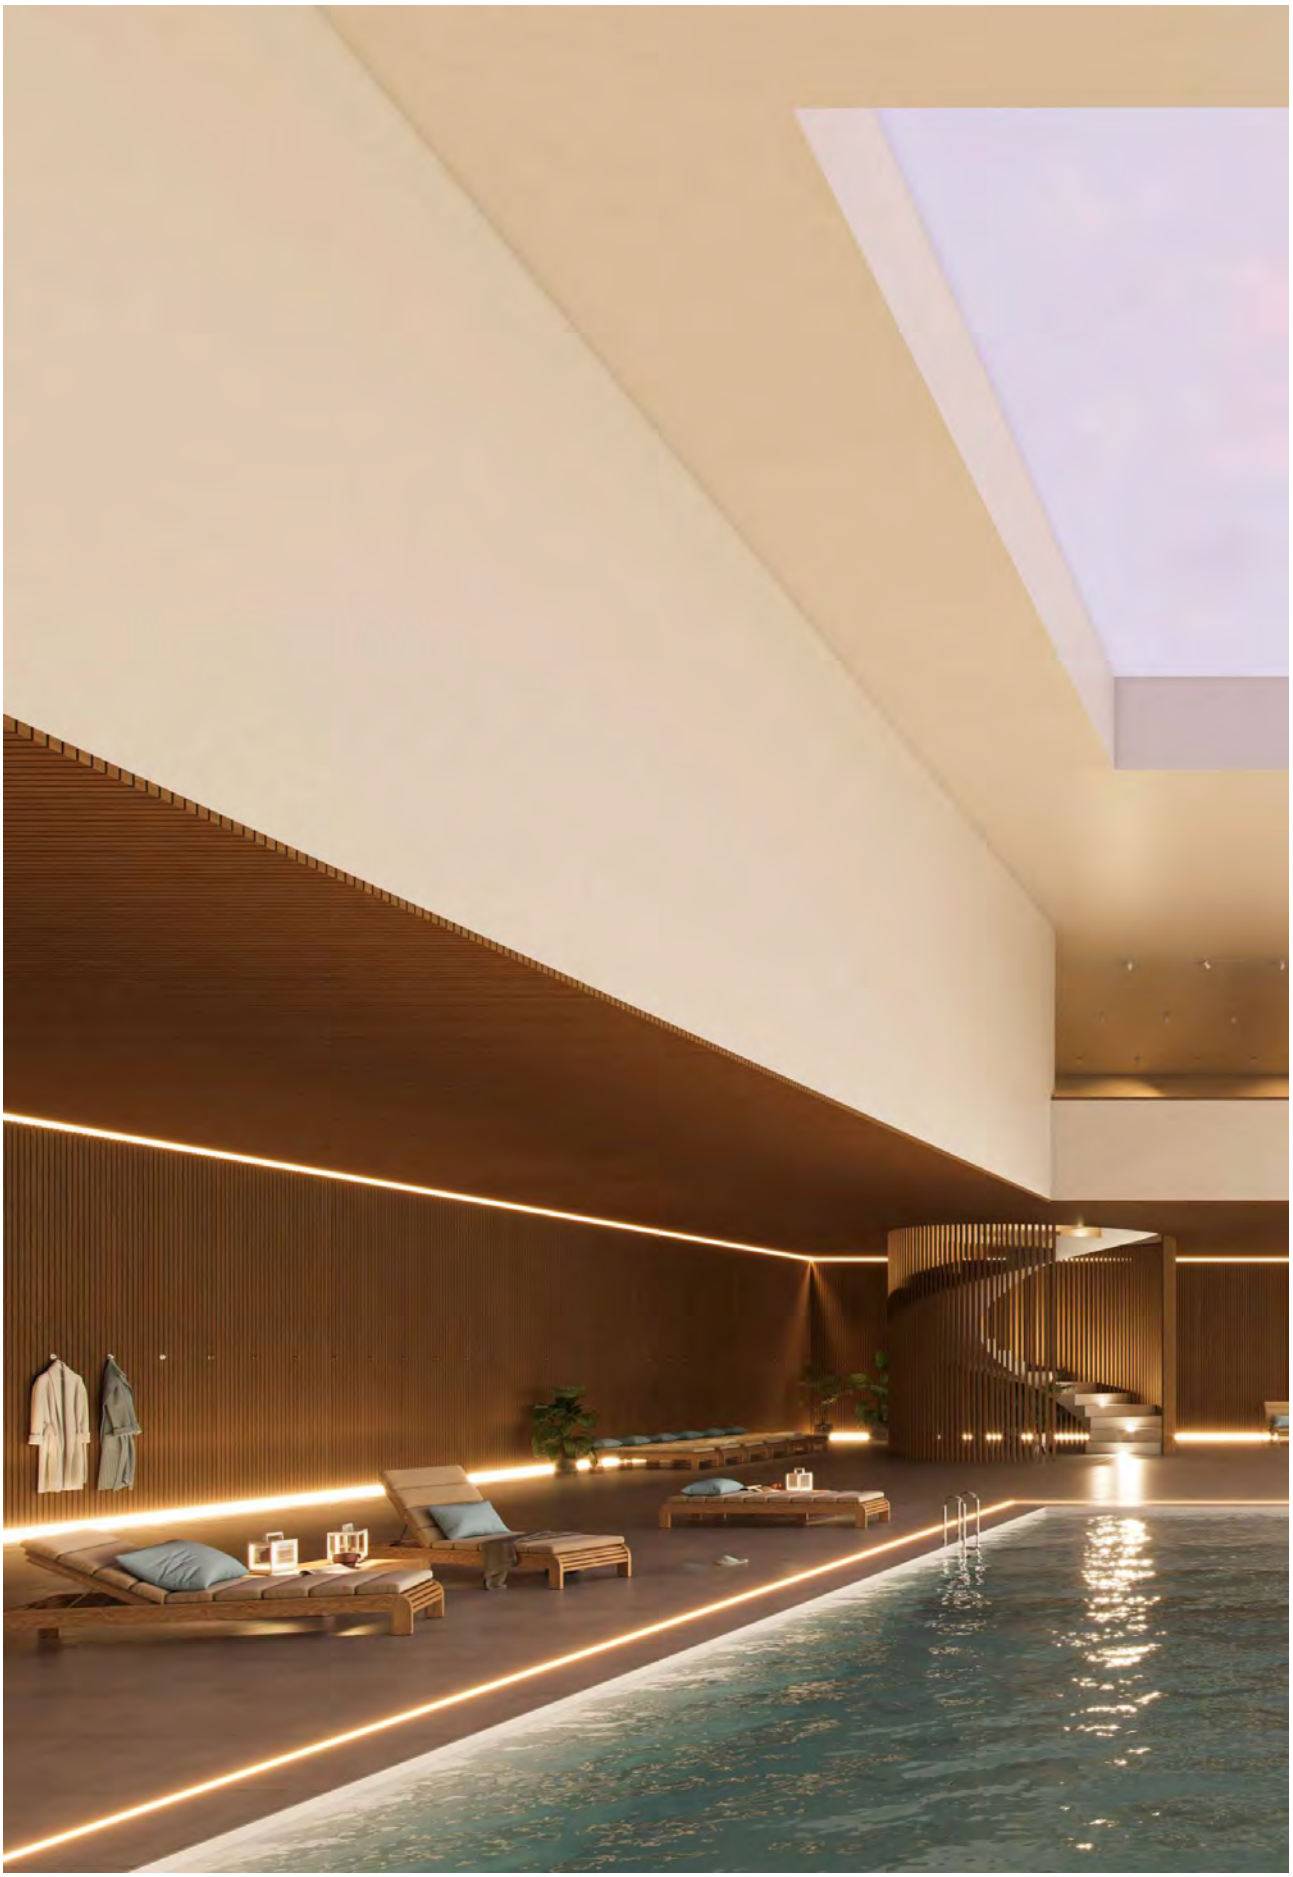





# LED Strips accessories

1. 
2. 
3. 
4. 
5. 
6. 

## Control Basic

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 90990 | ☐ | RF Mono Remote Basic | - | 5 VDC (3xAAA) | 120x46x18mm |
| 2. | 89260 | ☐ | RF CCT Remote Basic | - | 5 VDC (3xAAA) | 120x46x18mm |
| 3. | 88460 | ☐ | RF RGB Remote Basic | - | 5 VDC (3xAAA) | 120x46x18mm |
| 4. | 91430 | ☐ | RF RGB-W Remote Basic | - | 5 VDC (3xAAA) | 120x46x18mm |
| 5. | 86019 | ☐ | Controller Mono/CCT/RGB Basic | 3Cx5A | 12-24 VDC | 145x46x18mm |
| 6. | 87029 | ☐ | Controller RGB-W Basic | 5Cx5A | 12-24 VDC | 145x46x18mm |

RF |

1. 
2. 
3. 
4. 
5. 
6. 


## Control Top

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 81990 | ■ | RF Mono Remote Top | - | 4,5 VDC (3xAAA) | 120x55x17mm |
| 2. | 80260 | ■ | RF CCT Remote Top | - | 4,5 VDC (3xAAA) | 120x55x17mm |
| 3. | 79430 | ■ | RF RGB-W Remote Top | - | 4,5 VDC (3xAAA) | 120x55x17mm |
| 4. | 77019 | ☐ | Controller Mono/CCT/RGB/RGB-W Top | 4Cx5A | 12-23 VDC / 5Ax4C | 178x46x18mm |
| 5. | 82995 | ☐ | RF Mono Button Panel Top | - | 24 VDC | 86x86x41mm |
| 6. | 83475 | ■ | RF RGB-W Button Panel Top | - | 24 VDC | 86x86x41mm |

RF |

CE RoHS

3 YEARS WARRANTY | IP 20

1. 
2. 
3. 
4. 
5. 

6. 
7. 
8. 
9. 

## RF Control for Tuya

| | Code | | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|---|
| 1. | 85890 | ■ | | RF Dimming | - | 3VDC (CR2032) | 139x36x11mm |
| 2. | 85360 | ■ | | RF CCT | - | 3VDC (CD2032) | 139x36x11mm |
| 3. | 85460 | ■ | | RF RGB | - | 3VDC (CR2032) | 139x36x11mm |
| 4. | 85470 | ■ | | RF RGB-W | - | 3VDC (CR2032) | 139x36x11mm |
| 5. | 85990 | ■ | New | RF RGB+CCT | - | 3VDC (CR2032) | 139x36x11mm |
| 6. | 85894 | ■ | | RF Dimming 4 Zone | - | 3VDC (CR2032) | 138x50x22mm |
| 7. | 85364 | ■ | New | RF CCT 4 Zone | - | 4,5 VDC (3xAAA) | 120x55x17mm |
| 8. | 85475 | ■ | New | RF RGB-W 4 Zone | - | 4,5 VDC (3xAAA) | 120x55x17mm |
| 9. | 85995 | ■ | New | RF RGB+CCT 4 Zone | - | 4,5 VDC (3xAAA) | 120x55x17mm |

tuya | RF |

1. 
2. 
3. 

## Control Tuya

| | Code | | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|---|
| 1. | 22856 | □ | | Controller Tuya 5C | 5Cx3A | 12-24 VDC | 114x38x20mm |
| 2. | 22821 | □ | | Controller Push/Tuya 2C | 2Cx5A | 12-36W | 114x38x20mm |
| 3. | 22570 | □ | New | Controller Push/Tuya/RF 5C | 5Cx6A | 12-48W | 179x56x30mm |

tuya |

CE RoHS

3 YEARS WARRANTY | IP 20



1. 
2. 
3. 
4. 

5. 

6. 

7. 


8. 
9. 
10. 
11. 

## Control Casambi

| | Code | | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|---|
| 1. | 59682 | | New | Touch Dimmer Casambi 4C Oak/Black | - | - | Ø73x62mm |
| 2. | 59689 | | New | Touch Dimmer Casambi 4C Oak/Silver | - | - | Ø73x62mm |
| 3. | 59182 | | New | Touch Dimmer Casambi 4C Mahogany/Black | - | - | Ø73x62mm |
| 4. | 59189 | | New | Touch Dimmer Casambi 4C Mahogany/Silver | - | - | Ø73x62mm |
| 5. | 59112 | | New | Wall touch panel Black | - | - | 146x90x24mm |
| 6. | 57241 | | | Xpress Casambi White | - | - | 90x90x12mm |
| 7. | 57242 | | | Xpress Casambi Black | - | - | 90x90x12mm |
| 8. | 59121 | | New | Wall switch batteryfree 2C White | - | - | 81x81x14mm |
| 9. | 59122 | | New | Wall switch batteryfree 2C Anthracite | - | - | 81x81x14mm |
| 10. | 59141 | | New | Wall switch batteryfree 4C White | - | - | 81x81x14mm |
| 11. | 59142 | | New | Wall switch batteryfree 4C Anthracite | - | - | 81x81x14mm |



CASAMBI

12. 
13. 
14. 
15. 
16. 
17. 
18. 
19. 
20. 
21. 
22. 

## Control Casambi

| | Code | | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|---|
| 12. | 57924 | ☐ | New | Controller input 4 button Casambi | - | 230 VAC | 45x19x17mm |
| 13. | 59629 | ☐ | New | Smart Gateway Casambi | - | 230 VAC | 101x74x29mm |
| 14. | 59549 | ☐ | New | Led Strips regulator 5C Casambi/Push | 5CX5A | 12-48V | 186x29x21mm |
| 15. | 59519 | ☐ | New | Led Strips regulator 1C Casambi/Push | 12A | 12-48V | 44x57x19mm |
| 16. | 59733 | ☐ | New | Relay Casambi | 10A | - | 120x50 x32mm |
| 17. | 59777 | ☐ | New | Triac Dimmable Casambi/Push | - | - | Ø52x15,5mm |
| 18. | 59249 | ☐ | | Control CBU-PWM4 | 4Cx1,5A | 12-24 VDC | 72,6x30x18mm |
| 19. | 59739 | ☐ | | Relay Casambi | 10A | 200-240 VAC | 35x22x35mm. |
| 20. | 59769 | ☐ | | Controller End of phase | 0,43A | 85-240 VAC | 40,4x36x2x14mm |
| 21. | 59789 | ☐ | | Interface 0-10/1-10 Dali | - | 220-240 VAC | 56,5x35,8x22,3mm |
| 22. | 57588 | ☐ | | Controller PWM4+Push | 4Cx5A | 12-24 VDC | 88x54x25mm |

CASAMBI

1. 
2. 
3. 
4. 

## Control PMW / RF

| | Code | | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|---|
| 1. | 85890 | ■ | | RF Dimming | - | 3VDC (CR2032) | 139x36x11mm |
| 2. | 85894 | ■ | | RF Dimming 4 Zone | - | 3VDC (CR2032) | 138x50x22mm |
| 3. | 22799 | ☐ | New | Controller Push/RF Progressive | 8A | 12-48 VDC | 120x43x27mm |
| 4. | 22726 | ☐ | | Control Push - Dim / RF | 8A | 5-36 VDC | 97x33x18mm |

RF | PMW |

1. 
2. 
3. 
4. 
5. 

## Control SPI New

| | Code | | Version | Power Max | Pixels Max | VDC IN | Size |
|---|---|---|---|---|---|---|---|
| 1. | 92353 | ■ | SPI 1 Zone RGB/RGB-W Remote | - | - | 3VDC (CR2032) | 107x58,5x9mm |
| 2. | 92473 | □ | Controller SPI (RGB/RGB-W) | 8A | 1.024 | 5-24 VDC | 97x33x18mm |
| 3. | 92853 | □ | Controller SPI / Tuya (RGB/RGB-W) | 8A | 1.000 | 5-24 VDC | 114x38x20mm |
| 4. | 92553 | □ | SPI Signal Repeater | - | - | 5-24 VDC | 52x52x126mm |
| 5. | 92699 | ■ | Controller SPI / Computer | - | 2.048 | 5-24 VDC | 159x89x24mm |

tuya | RF | SPI |

1. 
2. 
3. 
4. 
5. 
6. 


## Control DMX New

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 96009 | □ | Controller DMX / Triac 2CH | 2Cx1A | 100-240 VAC | 170x50x23mm |
| 2. | 93470 | ■ | RF RGB-W DMX Touch Panel 4 Zone | - | 100-240 VAC | 86x86x33mm |
| 3. | 95153 | □ | Amplifier DMX 2CH | - | 12-48 VDC | 175x45x27mm |
| 4. | 93579 | ■ | Decoder DMX 5152 5CH | 5Cx4A | 12-48 VDC | 175x46x24mm |
| 5. | 95479 | ■ | Decoder DMX 5152 4CH | 4Cx5A | 12-48 VDC | 175x46x24mm |
| 6. | 95179 | □ | Decoder DMX 5152 1CH | 15A | 12-24 VDC | 170x50x23mm |

DMX |

CE RoHS

3 YEARS WARRANTY | IP 20

1. 
2. 
3. 
5. 
6. 

## Control Push / Triac

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 85890 | ■ | RF Dimming | - | 3 VDC (CR2032) | 139x36x11mm |
| 2. | 85894 | ■ | RF Dimming 4 Zones | - | 3 VDC (CR2032) | 138x50x22mm |
| 3. | 84431 | □ | RF Dimming Panel | - | 3 VDC (CR2032) | 86x86x23mm |
| 4. | 22726 | □ | Control Push - Dim | 8A | 5-36 VDC | 97x33x18mm |
| 5. | 85876 | □ | Controller Wifi RF Push Triac Tuya | 1,5A | 100-240 VAC | 52x52x26mm |
| 6. | 85884 | □ | Controller RF Push Triac | 2A | 100-240 VAC | 110x48x67mm |

tuya | PUSH | DALI |

1. 

## Control Dali Push Triac

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 22948 | □ | Controller Dali+Push/Triac | 1,5A | 100-240 VAC | 187x46x22mm |

DALI |

1. 
2. 

## Control Dali Push

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 22490 | ■ | Controller PWM Dali Push 1-10V | 12A | 12-24-48 VDC | 155x51x26mm |
| 2. | 22499 | ■ | Controller PWM Dali Push 1-10V | 5A | 12-24-48 VDC | 132x22x20mm |

PUSH | DALI |

CE RoHS

3 YEARS WARRANTY | IP 20

1. 

2. 

## Control Driver RF / Push New

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 22911 | ☐ | Controller 4CH RF Push | 3-45 VDC/150-500mA | 12-48V | 139x36x11mm |
| 2. | 22974 | ☐ | Controller 4CH RF Push | 3-45 VDC/350-1.200mA | 12-48V | 138x50x22mm |

RF | PUSH |

1. 

2. 

3. 

4. 

## Motion Sensor

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 85993 | ■ | Mini Sensor Mono PWM | 6A | 12-24 VDC | 55x10mm |
| 2. | 85263 | ■ | Mini Sensor CCT PWM | 2Cx4A | 12-24 VDC | 55x10mm |
| 3. | 85183 | ■ | Motion Sensor Pir | 8A | 12-24 VDC | 55x10mm |
| 4. | 85332 | ☐ | Motion Sensor Surface Pir | 4A | 12-24 VDC | 45x62mm |

1. 

2.
3. 

4. 

5.
6. 

## Motion Sensor

| | Code | | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|---|
| 1. | 85220 | ☐ | | Sensor Pir Double Surface hand/door | 4A | 12-24 VDC | 12x12mm |
| 2. | 85120 | ☐ | | Sensor Simple Surface door | 4A | 12-24 VDC | 12x12mm |
| 3. | 85420 | ☐ | New | Sensor Simple Surface hand | 4A | 12-24 VDC | 12x12mm |
| 4. | 85626 | ☐ | | Sensor Pir Double Recessed hand/door | 4A | 12-24 VDC | 14x18mm |
| 5. | 85336 | ☐ | | Sensor Simple Recessed door | 4A | 12-24 VDC | 14x18mm |
| 6. | 85330 | ☐ | New | Sensor Simple Recessed hand | 4A | 12-24 VDC | 14x18mm |

CE RoHS

3 YEARS WARRANTY | IP 20

# Power Supplies 24V

## Power Supplies Standard

| Code | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|
| 62430 | ☐ | 30W | IP20 | 198-264 VAC | 24 VDC | 162x42x30mm |
| 62460 | ☐ | 60W | IP20 | 198-264 VAC | 24 VDC | 187x45x30mm |
| 62475 | ☐ | 75W | IP20 | 198-264 VAC | 24 VDC | 187x45x30,5mm |
| 62412 | ☐ | 120W | IP20 | 198-264 VAC | 24 VDC | 268x45x30,5mm |
| 62415 | ☐ | 150W | IP20 | 198-264 VAC | 24 VDC | 268x45x30,5mm |



## Power Supplies Basic

| Code | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|
| 22420 | ☐ | 24W | IP67 | 176-264 VAC | 24 VDC | 110x40x30mm |
| 22435 | ☐ | 40W | IP67 | 176-264 VAC | 24 VDC | 148x40x30mm |
| 22460 | ☐ | 60W | IP67 | 176-264 VAC | 24 VDC | 162,5x42,5x32mm |
| 22410 | ☐ | 100W | IP67 | 176-264 VAC | 24 VDC | 190x52x33mm |



## Power Supplies Top

| Code | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|
| 22415 | ☐ | 150W | IP67 | 90-264 VAC | 24 VDC | 191x63x37,5mm |
| 22424 | ☐ | 240W | IP67 | 90-305 VAC | 24 VDC | 244,2x68x38,8mm |
| 22430 | ☐ | 300W | IP67 | 90-305 VAC | 24 VDC | 246x77x39,5mm |
| 22432 | ☐ | 320W | IP67 | 90-305 VAC | 24 VDC | 252x90x43,8mm |



## Power Supplies Slim

| Code | | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|---|
| TR3024 | ☐ | | 30W | IP20 | 176-264 VAC | 24 VDC | 261x30x17mm |
| TR6024 | ☐ | | 60W | IP20 | 176-264 VAC | 24 VDC | 329x30x17mm |
| TR10024 | ☐ | | 100W | IP20 | 176-264 VAC | 24 VDC | 365X30X18mm |
| TR16024 | ☐ | New | 160W | IP20 | 198-264 VAC | 24 VDC | 395X30,8X21,5mm |



CE RoHS

PF >0,9 | 3 YEARS WARRANTY

## Power Supplies Triac

| Code | | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|---|
| 24609 | ☐ | | 60W | IP20 | 200-240 VAC | 24 VDC | 178x61x24mm |
| 24109 | ■ | | 100W | IP66 | 200-240 VAC | 24 VDC | 230x70x43mm |
| 24159 | ■ | | 150W | IP66 | 200-240 VAC | 24 VDC | 256x78x47mm |
| 24309 | ■ | New | 300W | IP66 | 200-240 VAC | 24 VDC | 276x78x47mm |

TRIAC DIMM



## Power Supplies Dali-2 / Push New

| Code | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|
| 64458 | ☐ | 45W | IP20 | 176-264 VAC | 24 VDC | 187x45x30,5mm |
| 64808 | ☐ | 80W | IP20 | 176-264 VAC | 24 VDC | 290x45x30,5mm |
| 64158 | ☐ | 150W | IP20 | 176-264 VAC | 24 VDC | 290x45x30,5mm |

DALI 2



## Power Supplies Dali-2

| Code | | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|---|
| 24758 | ■ | | 90W | IP67 | 100-305 VAC | 24 VDC | 180x63x35,5mm |
| 24108 | ■ | | 120W | IP67 | 100-305 VAC | 24 VDC | 199x63x35,5mm |
| 24208 | ■ | | 200W | IP67 | 100-305 VAC | 24 VDC | 219x63x35,5mm |
| 24308 | ■ | New | 300W | IP66 | 110-277 VAC | 24 VDC | 301x78x25,1mm |

24308 DALI 2



## Power Supplies Dali-2 DT-8 / Push Dim - CCT New

| Code | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|
| 64453 | ☐ | 45W | IP20 | 176-264 VAC | 24 VDC | 187x45x30,5mm |
| 64803 | ☐ | 80W | IP20 | 176-264 VAC | 24 VDC | 290x45x30,5mm |
| 64153 | ☐ | 150W | IP20 | 176-264 VAC | 24 VDC | 290x45x30,5mm |

DALI 2



CE RoHS

PF >0,9 | 3 YEARS WARRANTY

# Led strips accessories

## SMD 10mm Monocolor IP20



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

## SMD 10mm Monocolor IP65



End Cap
☐ 20635



End Cap
☐ 20625



Joint
24,3x14,6x7,7mm
☐ 20225



Joint
24,3x14,6x7,7mm
☐ 20125

## SMD 10mm Monocolor IP67



End Cap
☐ 32635



End Cap
☐ 32625

## Fine 32 IP65



End Cap
☐ 32635



End Cap
☐ 32625



Connector kit
☐ 32699



Join 180°
☐ 32899



Join 90°
☐ 32499



Clip
☐ 32900



Joint
☐ 32299

## COB 10mm Monocolor IP20



Joint
☐ 31709



Joint
☐ 31809



Joint
☐ 31909

## COB 10mm Monocolor IP67



End Cap
☐ 32635



End Cap
☐ 32625

## SMD 10mm CCT IP20



Joint
13,8x11,55x3,9mm
☐ 20230



Joint
13,55x11,67x4,7mm
☐ 20130

## SMD 10mm CCT IP65



End Cap
☐ 20635



End Cap
☐ 20625



Joint
24,3x14,6x7,7mm
☐ 20235



Joint
24,3x14,6x7,7mm
☐ 20135

## SMD 10mm RGB IP20



Joint
13,54x11,7x4,1mm
☐ 20240



Joint
13,56x13,46x4,7mm
☐ 20140

## SMD 10mm RGB IP65



End Cap
☐ 20635



End Cap
☐ 20625



Joint
24,3x14,6x7,68mm
☐ 20245



Joint
24,3x14,6x7,68mm
☐ 20145

## SMD 12mm RGBW IP20



Joint
13,5x13,73x4,2mm
☐ 20150



Joint
13,5x13,55x4,8mm
☐ 20250

## COB 12mm RGBW IP20



Joint
☐ 20066



Joint
☐ 20266

## SMD 4mm Monocolor IP20



Joint
☐ 20049



Joint
☐ 20249

## Single-wire connections



20917



20915

## Bipolar connections



20927



20925

# Compatibility Table

| FINE | 31 | 32 N | 36 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| BOX-10 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-11 | — | — | — | — | — | — | — | — | — | — | — | ✓ | ✓ | — |
| BOX-12 | — | — | — | — | — | — | — | — | — | — | — | ✓ | ✓ | — |
| BOX-13 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-14 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | — | ✓ | IP20 ✓ / IP67 — | ✓ | — | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-15 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-16 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-17 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-18 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-19 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-21 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | — | ✓ | IP20 ✓ / IP67 — | ✓ | — | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-22 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-23 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| BOX-24 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-27 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | — | ✓ | IP20 ✓ / IP67 — | ✓ | — | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-28 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-29 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | — | ✓ | ✓ | ✓ | ✓ |
| BOX-30 12mm | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-30 20mm | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| BOX-33 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| BOX-35 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| BOX-37 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| BOX-38 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| BOX-39 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-53 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| BOX-60 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-65 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | — | ✓ | IP20 ✓ / IP67 — | ✓ | — | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-67 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | — | ✓ | IP20 ✓ / IP67 — | ✓ | — | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-68 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-71 | ✓ | IP20 ✓ / IP65 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| BOX-73 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-75 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-95 | IP20 ✓ / IP67 — | — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — | ✓ | ✓ | ✓ | ✓ | ✓ | IP20 ✓ / IP67 — |
| BOX-98 | IP20 ✓ / IP67 — | — | ✓ | ✓ | — | — | — | IP20 ✓ / IP67 — | ✓ | — | ✓ | ✓ | ✓ | ✓ |
| BOX-99 | — | — | — | — | — | — | — | — | — | — | — | ✓ | ✓ | — |
| HORIZON | ✓ | ✓ | ✓ | ✓ | — | — | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

| | 52 | 54 | 55 | 56 | 61 | 63 | 64 | 66 | 69 | 71 | 76 | 84 | 96 | RUN | SPI | DMX |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | ✓ | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| | ✓ | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | | ✓ | — | — | ✓ | — | ✓ | ✓ | — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | ✓ | ✓ | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | ✓ | ✓ | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | ✓ | ✓ | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | — | ✓ | — | — | ✓ | — | ✓ | ✓ | — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | ✓ | ✓ | — | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | — | ✓ | ✓ | ✓ |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | — | ✓ | — | — | ✓ | — | ✓ | ✓ | — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | ✓ | ✓ | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | ✓ | ✓ | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | ✓ | ✓ | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | ✓ | ✓ | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | — | ✓ | ✓ | ✓ |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | — | ✓ | — | — | ✓ | — | ✓ | ✓ | — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | — | ✓ | — | — | ✓ | — | ✓ | ✓ | — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | ✓ | IP20 ✓ IP67 — | — | — | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | — | ✓ | ✓ | ✓ |
| | ✓ | ✓ | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | IP20 ✓ IP67 — | IP20 ✓ IP67 — | — | — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | IP20 ✓ IP67 — | ✓ | ✓ | — | ✓ | ✓ | IP20 ✓ IP67 — |
| | — | ✓ | — | — | ✓ | — | ✓ | — | ✓ | — | — | ✓ | — | ✓ | ✓ | — |
| | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| | — | ✓ | — | — | ✓ | — | ✓ | — | ✓ | — | ✓ | ✓ | — | ✓ | ✓ | ✓ |

# Recommended Wiring

| FINE | 5 mts | 10 mts | 15 mts | 20 mts | 25 mts |
|---|---|---|---|---|---|
| FINE 31 | 0,35 mm | – | – | – | – |
| FINE 32N | 0,5 mm | 0,5 mm | 0,5 mm | 0,5 mm | 0,5 mm |
| FINE 36 | 0,5 mm | 0,5 mm | – | – | – |
| FINE 41 | 0,5 mm | 0,75 mm | 0,75 mm | – | – |
| FINE 42 | 0,35 mm | 0,5 mm | – | – | – |
| FINE 43 | 0,35 mm | – | – | – | – |
| FINE 44 | 0,5 mm | 0,75 mm | – | – | – |
| FINE 45 | 0,35 mm | 0,5 mm | 0,75 mm | – | – |
| FINE 46 | 0,5 mm | 0,75 mm | 0,75 mm | – | – |
| FINE 47 | 0,35 mm | – | – | – | – |
| FINE 48 | 0,35 mm | 0,5 mm | – | – | – |
| FINE 49 | 0,35 mm | – | – | – | – |
| FINE 50 | 0,35 mm | – | – | – | – |
| FINE 51 | 0,5 mm | 0,75 mm | 1 mm | – | – |
| FINE 52 | 0,5 mm | – | – | – | – |
| FINE 54 | 0,35 mm | – | – | – | – |
| FINE 55 | 0,35 mm | 0,5 mm | – | – | – |
| FINE 56 | 0,35 mm | 0,5 mm | – | – | – |
| FINE 61 | 0,35 mm | – | – | – | – |
| FINE 63 | 0,5 mm | 0,75 mm | – | – | – |
| FINE 64 | 0,5 mm | 0,75 mm | – | – | – |
| FINE 66 | 0,5 mm | – | – | – | – |
| FINE 69 | 0,2 mm | 0,2 mm | – | – | – |
| FINE 71 | 0,5 mm | – | – | – | – |
| FINE 76 | 0,35 mm | 0,5 mm | 0,75 mm | – | – |
| FINE 84 | 0,35 mm | 0,35 mm | 0,5 mm | 0,75 mm | 1 mm |
| FINE 96 | 0,35 mm | 0,5 mm | – | – | – |


*Cable section.

# Light Perception


| | Open Circuit | | | | | Back Feed | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| FINE | 5 mts | 10 mts | 15 mts | 20 mts | 25 mts | 5 mts | 10 mts | 15 mts | 20 mts | 25 mts |
| FINE 31 | 95% | – | – | – | – | 95% | 95% | – | – | – |
| FINE 32N | 100% | 100% | 90% | 90% | 80% | – | – | – | – | – |
| FINE 36 | 90% | 66% | – | – | – | 95% | 90% | 76% | – | – |
| FINE 41 | 94% | 72% | 55% | – | – | 96% | 94% | 79% | 72% | – |
| FINE 42 | 98% | 78% | – | – | – | 100% | 93% | – | – | – |
| FINE 43 | 100% | – | – | – | – | 100% | – | – | – | – |
| FINE 44 | 94% | 72% | – | – | – | 98% | 94% | – | – | – |
| FINE 45 | 95% | 75% | 55% | – | – | 96% | 94% | 85% | – | – |
| FINE 46 | 94% | 72% | 55% | – | – | 96% | 94% | 79% | 72% | – |
| FINE 47 | 100% | – | – | – | – | 100% | – | – | – | – |
| FINE 48 | 98% | 96% | – | – | – | 100% | 99% | 98% | 97% | 96% |
| FINE 49 | 90% | – | – | – | – | 100% | – | – | – | – |
| FINE 50 | 95% | – | – | – | – | 100% | – | – | – | – |
| FINE 51 | 100% | 80% | 70% | – | – | 100% | 95% | 90% | – | – |
| FINE 52 | 100% | – | – | – | – | 100% | 100% | – | – | – |
| FINE 54 | 98% | – | – | – | – | 100% | 90% | – | – | – |
| FINE 55 | 94% | 72% | – | – | – | 98% | 94% | – | – | – |
| FINE 56 | 98% | 80% | – | – | – | 100% | 95% | – | – | – |
| FINE 61 | 100% | – | – | – | – | 100% | 100% | – | – | – |
| FINE 63 | 92% | 65% | – | – | – | 96% | 92% | 70% | 65% | – |
| FINE 64 | 98% | 96% | – | – | – | 100% | 98% | 96% | 94% | 92% |
| FINE 66 | 98% | – | – | – | – | 100% | – | – | – | – |
| FINE 69 | 98% | 73% | – | – | – | 100% | 88% | 70% | 63% | – |
| FINE 71 | 95% | – | – | – | – | 100% | – | – | – | – |
| FINE 76 | 100% | 80% | 70% | – | – | 100% | 95% | 90% | – | – |
| FINE 84 | 100% | 100% | 90% | 90% | 80% | 100% | 100% | 100% | 95% | 95% |
| FINE 96 | 100% | 80% | – | – | – | 100% | 95% | – | – | – |

*Efficiency (%).

Open Circuit




Back Feed

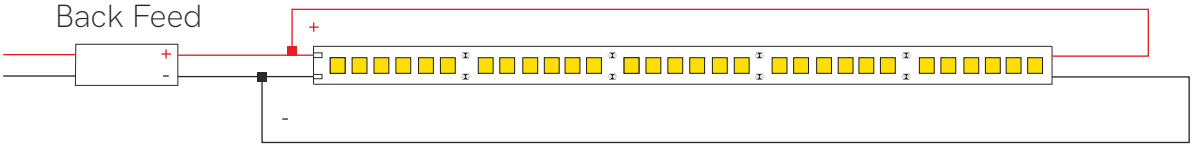




# Technical lighting


PESCADERÍA
8,50€
8,50€
12,95€
19,99€

New

## Lonja






## Technical Information

| | |
|---|---|
| Power | 22W |
| Lumens | 1.628 lm - 2.662 lm |
| Installation | Three Phase Track |
| Material | Aluminium |
| Finishes | White (9003) / Black (9005) |

| Code | |
|---|---|
| Code | 3 |

| Diffuser (Angle) | |
|---|---|
| Transparent (15°) | 1 |
| Transparent (24°) | 6 |
| Transparent (36°) | 8 |

| Size |
|---|
| 9 |

| CCT (Lm) | |
|---|---|
| FISH - 5.500K 2.662 lm | 1 |
| 3.000K 2.100 lm | 3 |
| 4.000K 2.206 lm | 4 |
| MEAT R - 1.950K 1.650 lm | 5 |
| FRUIT - 2.700K 2.310 lm | 6 |
| WINE/CHEESE - 2.700K 2.464 lm | 7 |
| BREAD - 2.400K 2.464 lm | 8 |
| MEAT M - 3.500K 1.628 lm | 9 |

| Driver | |
|---|---|
| On/Off | 1 |
| Triac | 4 |


| Colour | |
|---|---|
| White | 1 |
| Black | 2 |
| Custom RAL | |

Code: 3 9

*Create your code acording to your preferences.

Consult delivery terms and conditions.

## Accessories



Honeycomb anti-glare

■ 40111

CE RoHS EMC


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥90 | 3.000K 4.000K | 15° 24° 36° | 50/60 Hz | TRIAC DIMM | +40°C -15°C | 1




Beneito Faure, La Roca del Valles (Spain).


## Sono 40W



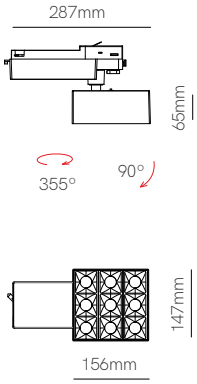


## Sono 60W



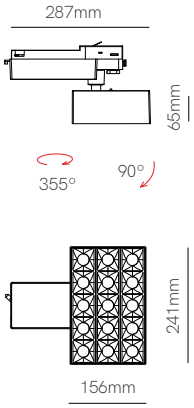


*Need Tuya Smart App to work.

## Technical Information

| | Sono 40W | Sono 60W |
|---|---|---|
| Power | 40W | 60W |
| Installation | Three Phase Track | Three Phase Track |
| Color Temperature | Tuya 2.600K - 4.000K | Tuya 2.600K - 4.000K |
| Lumens | 3.130 lm | 4.390 lm |
| Material | Aluminium and polycarbonate | Aluminium and polycarbonate |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 4946 | ☐ 4950 |
| | ■ 4947 | ■ 4951 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Gateway Wifi ☐
4956

CE RoHS

*See page 8 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥98 | 30° | 50/60 Hz | IK06 | +45°C -15°C | tuya | 1/4



Adjustable light beam
15°
55°

## Zoom




Power and CTT switch






## Technical Information

| | |
|---|---|
| Power | Switch 15W / 20W / 25W |
| Installation | Three Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 15W: 1.200 lm / 20W: 1.500lm / 25W: 1.800 lm |
| Material | Aluminium and polycarbonate |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 4900 |
| | ■ 4901 |
| ⓘ | Custom RAL |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 15° - 55° | 50/60 Hz | IK06 | +45°C -20°C | CCT SWITCH | POWER SWITCH | 1/10








New


## Crown track




## Crown base

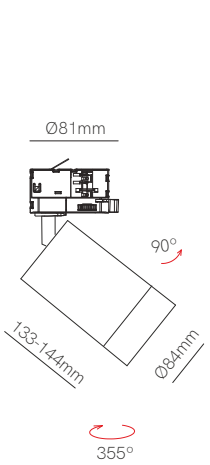


## Technical Information
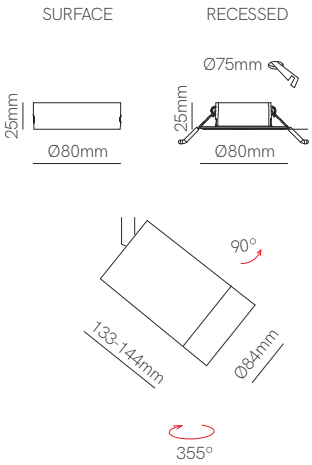
| | Crown track | Crown base |
|---|---|---|
| Power | 25W | 25W |
| Installation | Three Phase Track | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.625 lm | 1.625 lm |
| Material | Aluminium and polycarbonate | Aluminium and polycarbonate |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 5221 | ☐ 5224 |
| | ■ 5222 | ■ 5225 |

CE RoHS


Base version includes surface and recessed base (not mounted).

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 24° - 60° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20



## Lena



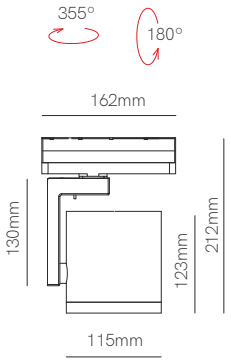


## Technical Information

| | |
|---|---|
| Power | 35W |
| Installation | Three Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 4.200 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 4449-V2 |
| | ■ 4450-V2 |
| ⓘ | Custom RAL |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/8




Óptica Rapp , La Laguna. Tenerife (Spain). Design: Grupo Globarq. Photography: Kuo estudio.

## Aston






## Technical Information

| | |
|---|---|
| Power | 20W |
| Installation | Three Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.400 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | 4439 |
| | 4440 |
| ⓘ | Custom RAL |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +40°C -15°C | CCT SWITCH | 1/8



## Konic dimmable






## Technical Information

| | |
|---|---|
| Power | 30W |
| Installation | Three Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.440 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 4985 |
| | ■ 4986 |
| ① | Custom RAL |

CE RoHS


① Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI >94 | 15° 38° 60° | 50/60 Hz | TRIAC DIMM | +40°C -15°C | CCT SWITCH | 1/8




## Kom 20W







## Kom 30W






## Kom 40W






## Technical Information

| | Kom 20W | Kom 30W | Kom 40W |
|---|---|---|---|
| Power | 20W | 30W | 40W |
| Installation | Three Phase Track | Three Phase Track | Three Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K | 3.000K / 4.000K |
| Lumens | 2.300 lm | 2.470 lm | 4.500 lm / 4.600 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ 4337 | ☐ 4336-N | ☐ 3.000K 4444 |
| | ■ 4339 | ■ 4338-N | ☐ 4.000K 4445 |
| | ⓘ Custom RAL | ⓘ Custom RAL | ■ 3.000K 4447 |
| | | | ■ 4.000K 4448 |
| | | | ⓘ Custom RAL |
| | CRI ≥80 \| CCT SWITCH | CRI ≥94 \| CCT SWITCH | CRI ≥80 |

CE RoHS EMC


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | 15° 24° 40° | 50/60 Hz | +50°C -20°C | AKZO NOBEL | 1/10



## Tram 20W










## Tram 30W









## Technical Information

| | Tram 20W | Tram 30W |
|---|---|---|
| Power | 20W | 30W |
| Installation | Three Phase Track | Three Phase Track |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 2.320 lm / 2.400 lm | 3.520 lm / 3.600 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 3.000K | 4427 | ☐ | 3.000K | 4541 |
| | ☐ | 4.000K | 4428 | ☐ | 4.000K | 4542 |
| | ■ | 3.000K | 4429 | ■ | 3.000K | 4543 |
| | ■ | 4.000K | 4430 | ■ | 4.000K | 4544 |

5 YEARS WARRANTY | 3 YEARS WARRANTY


CE RoHS

30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +45°C -20°C | 1/10



## Alfa






## Technical Information

| | |
|---|---|
| Power | 32W |
| Installation | Three Phase Track |
| Color Temperature | 2.700K / 3.000K / 4.000K |
| Lumens | 3.100 lm / 3.200 lm / 3.250 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 2.700K | 4038 |
| | ☐ | 3.000K | 4039 |
| | ☐ | 4.000K | 4040 |
| | ■ | 2.700K | 4176 |
| | ■ | 3.000K | 4177 |
| | ■ | 4.000K | 4178 |


CE RoHS

5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -10°C | AKZO NOBEL | 1/10




## Picolo track






## Picolo base



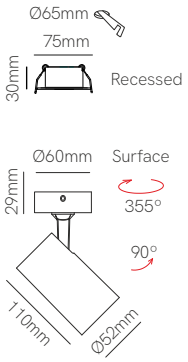


## Technical Information

| | Picolo track | Picolo base |
|---|---|---|
| Power | 9,5W | 9,5W |
| Installation | Three Phase Track | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.300 lm | 1.300 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 4437 | ☐ 4833 |
| | ■ 4438 | ■ 4834 |
| | ⓘ Custom RAL | ⓘ Custom RAL |


CE RoHS

ⓘ Consult delivery terms and conditions.
*Surface and recessed base included with Picolo base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH | AKZO NOBEL | 1/20


## Picolo GU10 track V3






## Picolo GU10 base



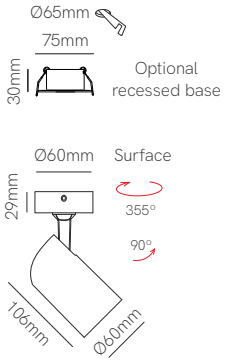


## Technical Information

| | Picolo GU10 track V3 | Picolo GU10 base |
|---|---|---|
| Installation | Three Phase Track | Surface / Recessed |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| Code | ☐ 3990-V3 | ☐ 4050 |
| | ■ 3989-V3 | ■ 4049 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | 3 YEARS WARRANTY \| 1/20 | 5 YEARS WARRANTY \| 1/40 |

ⓘ Consult delivery terms and conditions.

## Accessories




Recessed base
4835 ☐ 4836 ■

CE RoHS


*GU10 bulbholder included.

IP 20 | 220/240 VAC | AKZO NOBEL

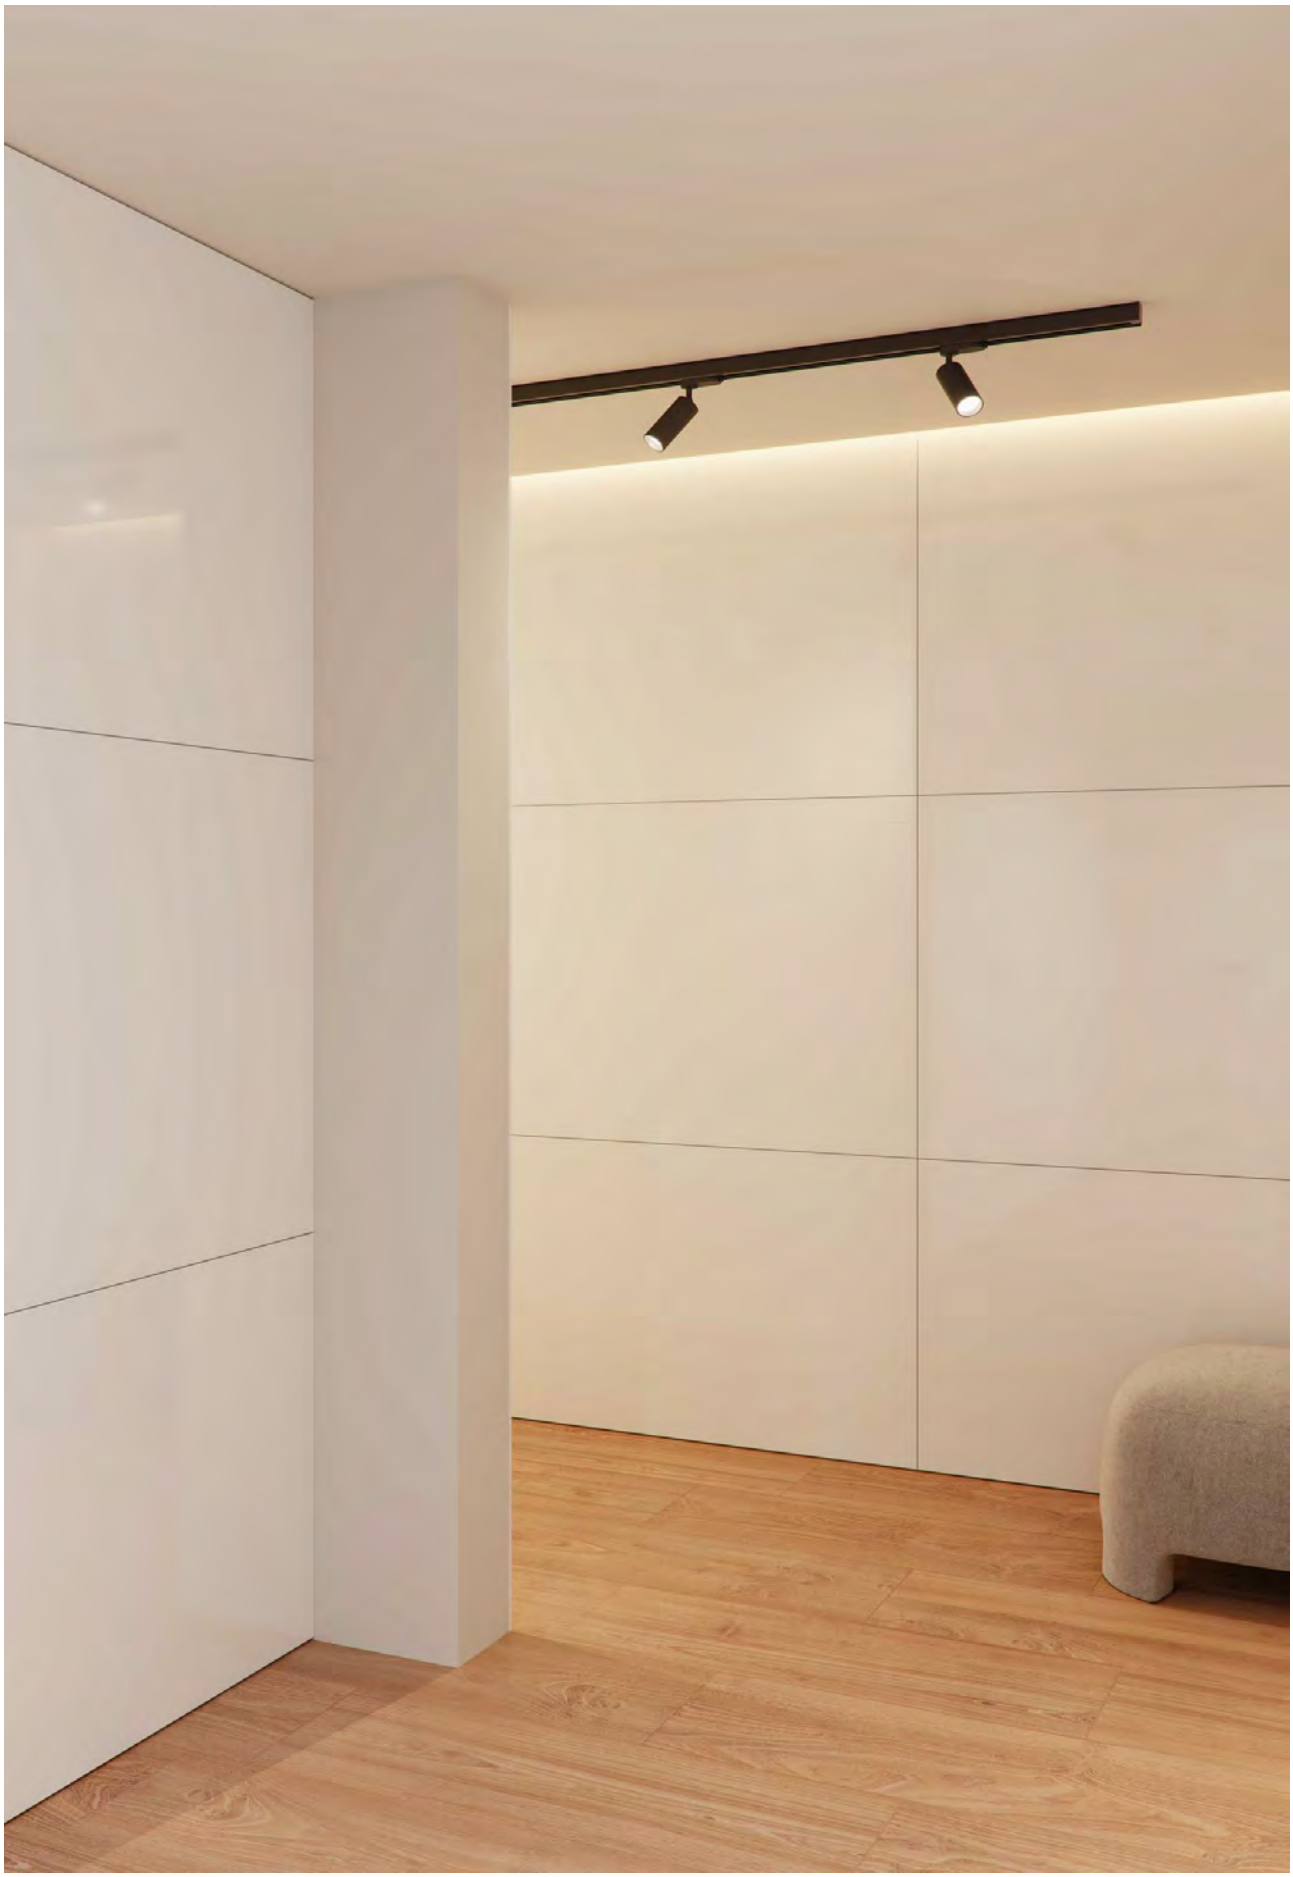


## Picolo AR111 track






## Picolo AR111 base



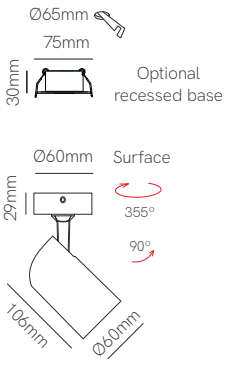


## Technical Information

| | Picolo AR111 track | Picolo AR111 base |
|---|---|---|
| Installation | Three Phase Track | Surface / Recessed |
| Material | Aluminium | Aluminium |
| Finishes | White | White |
| Code | ☐ 4435 | ☐ 4433 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Recessed base
4835 ☐

CE RoHS

*GU10 bulbholder included.

5 YEARS WARRANTY | IP 20 | 220/240 VAC | AKZO NOBEL | 1/40






New

## Cookie three phase track






## Technical Information


| | |
|---|---|
| Power | 12W |
| Installation | Threee Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 985 lm |
| Material | Aluminium |
| Finishes | White / Black |


| Code | | |
|---|---|---|
| | ☐ | 5179 |
| | ■ | 5180 |

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 38° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/20

# Three phase track surface accessories

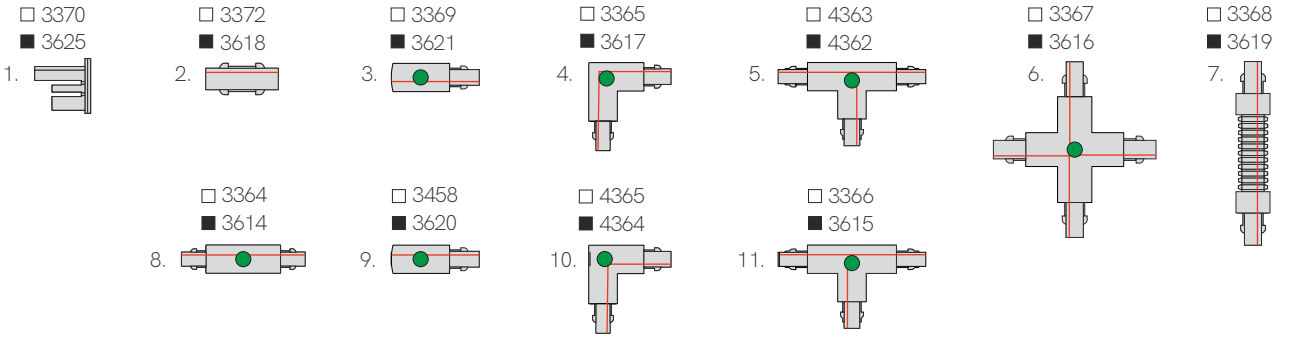

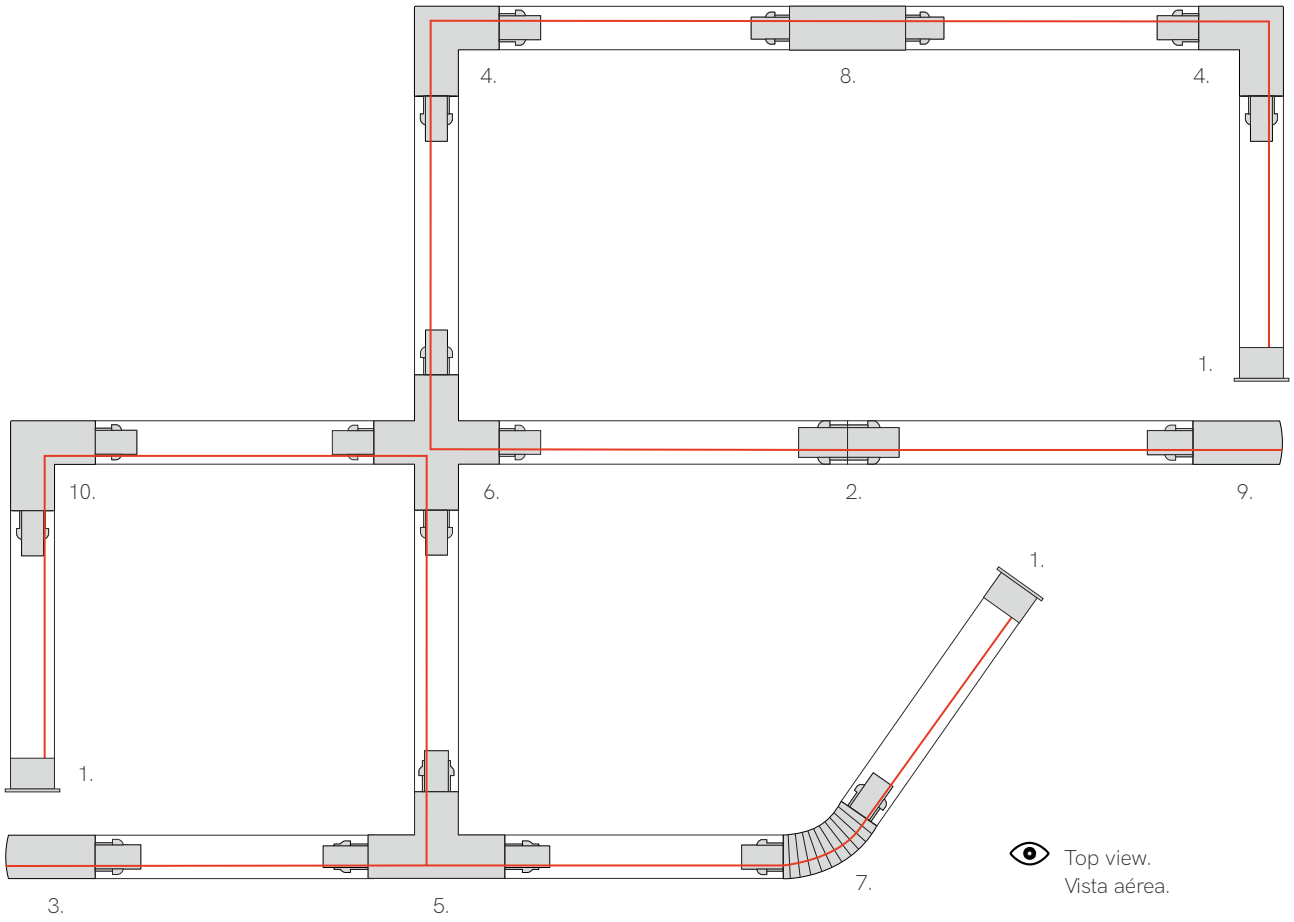
● Allows power input

CE RoHS

3 YEARS WARRANTY | IP 20



*End cap and power supply included

## Three phase track surface

W: 32mm H: 31mm

| | | |
|---|---|---|
| ☐ | 1m | 3795 |
| ☐ | 2m | 3796 |
| ☐ | 3m | 3797 |
| ■ | 1m | D-3626 |
| ■ | 2m | D-3627 |
| ■ | 3m | D-3628 |



## Track ceiling surface

L: 30mm W: 25mm H: 12mm

| | |
|---|---|
| ☐ | 3373 |
| ■ | 3623 |



## Track power supply surface

L: 98mm W: 32mm H: 32mm

| | | |
|---|---|---|
| ☐ | Left | 3369 |
| ☐ | Right | 3458 |
| ■ | Left | 3621 |
| ■ | Right | 3620 |



## Joint track without spacing

L: 68mm W: 25mm H: 27mm

| | |
|---|---|
| ☐ | 3372 |
| ■ | 3618 |



## Joint track with spacing surface

L: 166mm W: 35mm H: 32mm

| | |
|---|---|
| ☐ | 3364 |
| ■ | 3614 |



## L Joint track surface

L: 100mm W: 66mm H: 32mm

| | | |
|---|---|---|
| ☐ | Left | 4365 |
| ☐ | Right | 3365 |
| ■ | Left | 4364 |
| ■ | Right | 3617 |



## T Joint track surface

L: 166mm W: 100mm H: 32mm

| | | |
|---|---|---|
| ☐ | Left | 4363 |
| ☐ | Right | 3366 |
| ■ | Left | 4362 |
| ■ | Right | 3615 |



## X Joint track surface

L: 166mm W: 166mm H: 32mm

| | |
|---|---|
| ☐ | 3367 |
| ■ | 3616 |



## Flexible joint track

L: 245mm W: 35mm H: 32mm

| | |
|---|---|
| ☐ | 3368 |
| ■ | 3619 |



## End cap

L: 32mm W: 32mm H: 32mm

| | |
|---|---|
| ☐ | 3370 |
| ■ | 3625 |



## Three phase adapter

L: 70mm W: 40mm H: 41mm

| | |
|---|---|
| ☐ | 3371-V2 |
| ■ | 3624-V2 |



## Suspension kit

L: 3.000mm W: Ø35 | Ø2.4 H: 47mm

| | |
|---|---|
| ☐ | 3459 |
| ■ | 3622 |





## Three phase surface base

L: Ø100mm H: 32mm

| | |
|---|---|
| ☐ | 4700 |
| ■ | 4701 |

# Three phase track recessed accessories

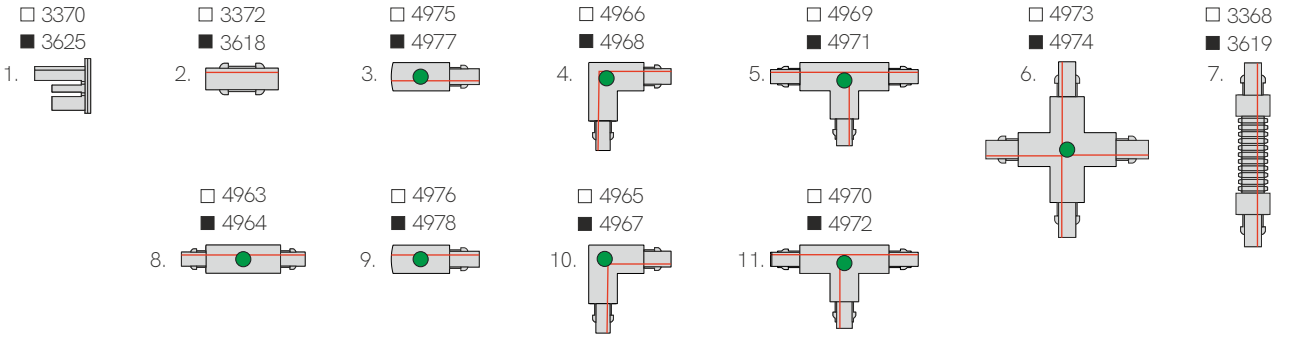

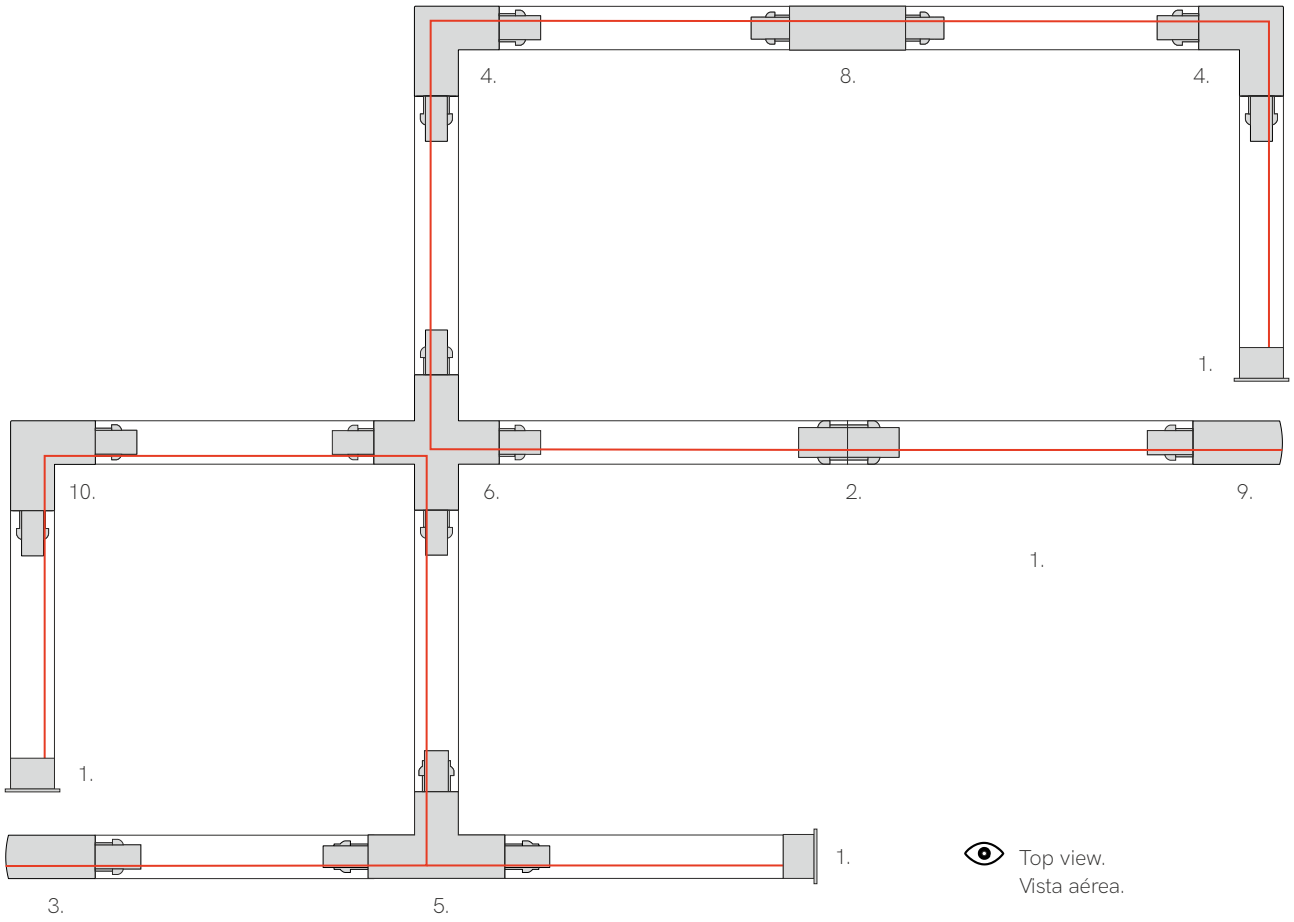
● Allows power input

CE RoHS

3 YEARS WARRANTY | IP 20



*End cap and power supply included

## Three phase track recessed
W: 56mm H: 33mm

| | | |
|---|---|---|
| ☐ | 2m | 3897 |
| ☐ | 3m | 3898 |
| ■ | 2m | 4753 |
| ■ | 3m | 4754 |



## Track ceiling recessed
L: 64mm W: 25mm H: 32mm

| | | |
|---|---|---|
| ☐ | 3805 | |



## Track power supply recessed
L: 98mm W: 56,5mm H: 33,7mm

| | | |
|---|---|---|
| ☐ | Left | 4975 |
| ☐ | Right | 4976 |
| ■ | Left | 4977 |
| ■ | Right | 4978 |



## Joint track without spacing
L: 68mm W: 25mm H: 27mm

| | | |
|---|---|---|
| ☐ | 3372 | |
| ■ | 3618 | |



## Joint track with spacing recessed
L: 166mm W: 56,5mm H: 33,7mm

| | | |
|---|---|---|
| ☐ | 4963 | |
| ■ | 4964 | |



## Flexible joint track
L: 245mm W: 35mm H: 32mm

| | | |
|---|---|---|
| ☐ | 3368 | |
| ■ | 3619 | |



## L Joint track recessed
L: 111mm W: 111mm H: 33,7mm

| | | |
|---|---|---|
| ☐ | Left | 4965 |
| ☐ | Right | 4966 |
| ■ | Left | 4967 |
| ■ | Right | 4968 |



## T Joint track recessed
L: 166mm W: 111mm H: 33,7mm

| | | |
|---|---|---|
| ☐ | Left | 4969 |
| ☐ | Right | 4970 |
| ■ | Left | 4971 |
| ■ | Right | 4972 |



## X Joint track recessed
L: 166mm W: 166mm H: 33,7mm

| | | |
|---|---|---|
| ☐ | 4973 | |
| ■ | 4974 | |



## End cap
L: 32mm W: 32mm H: 32mm

| | | |
|---|---|---|
| ☐ | 3370 | |
| ■ | 3625 | |



## Three phase adapter
L: 70mm W: 40mm H: 41mm

| | | |
|---|---|---|
| ☐ | 3371-V2 | |
| ■ | 3624-V2 | |



## Three phase recessed base
L: Ø130mm H: 60mm Ø110mm


| | | |
|---|---|---|
| ☐ | 3851 | |
| ■ | 3852 | |

*Need Three Phase Surface Base (4700 or 4701) to put inside.



## Nox






## Technical Information

| | |
|---|---|
| Power | 30W |
| Installation | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.460 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ☐ 4241-N |
| | ■ 4242-N |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Included with:
4241-N



Included with:
4241-N / 4242-N


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥94 | 15° 24° 40° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/8



## Bonn



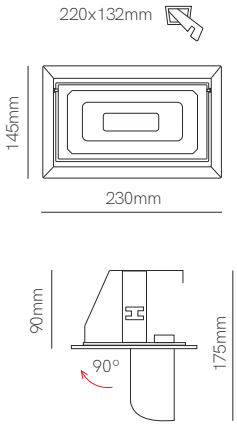


## Technical Information

| | |
|---|---|
| Power | 40W |
| Installation | Recessed |
| Color Temperature | 3.000K / 4.100K |
| Lumens | 4.750 lm / 4.800 lm |
| Material | Aluminium |
| Finishes | White / Gray |

| Code | | | |
|---|---|---|---|
| | ☐ | 3.000K | 4097 |
| | ☐ | 4.100K | 4096 |
| | ■ | 3.000K | 4099 |
| | ■ | 4.100K | 4098 |
| ① | | Custom RAL | |


CE RoHS EMC

① Consult delivery terms and conditions.


5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | 1/12



## Tram recessed 2




## Tram recessed 5

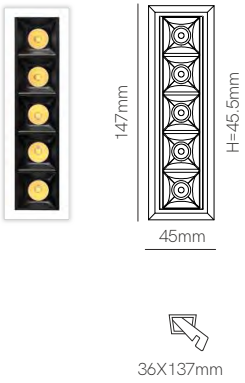


*Need Tuya Smart App to work.

## Technical Information

| | | |
|---|---|---|
| Power | 6W | 10W |
| Installation | Recessed | Recessed |
| Color Temperature | Tuya 2.700K - 6.000K | Tuya 2.700K - 6.000K |
| Lumens | 220 lm | 500 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| Code | ☐ 4731 | ☐ 4733 |
| | ■ 4732 | ■ 4734 |
| | 1/50 | 1/40 |

## Accessories




Gateway Wifi
4956 ☐

CE RoHS


*See page 8 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥90 | 30° | 50/60 Hz | IK06 | +40°C -10°C | tuya

## Tram recessed 10

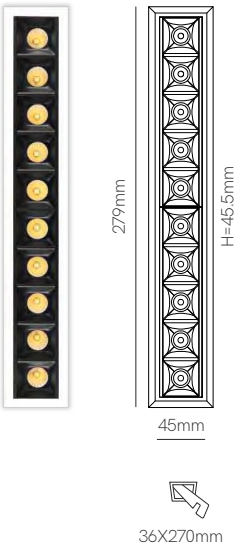


## Tram recessed 15

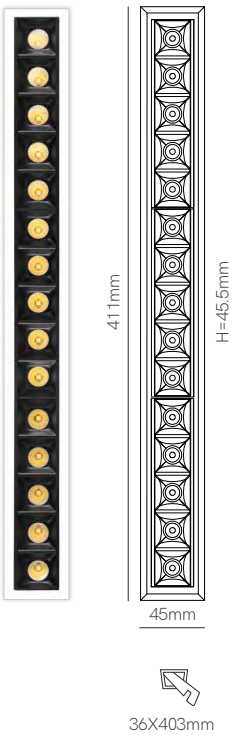


*Need Tuya Smart App to work.

## Technical Information

| | | |
|---|---|---|
| Power | 20W | 30W |
| Installation | Recessed | Recessed |
| Color Temperature | Tuya 2.700K - 6.000K | Tuya 2.700K -6.000K |
| Lumens | 1.000 lm | 1.500 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| Code | ☐ 4735 | ☐ 4737 |
| | ■ 4736 | ■ 4738 |
| | 1/20 | 1/20 |

## Accessories




Gateway Wifi
4956 ☐

CE RoHS

*See page 8 for Gateway additional info.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥90 | 30° | 50/60 Hz | IK06 | +40°C -10°C | tuya

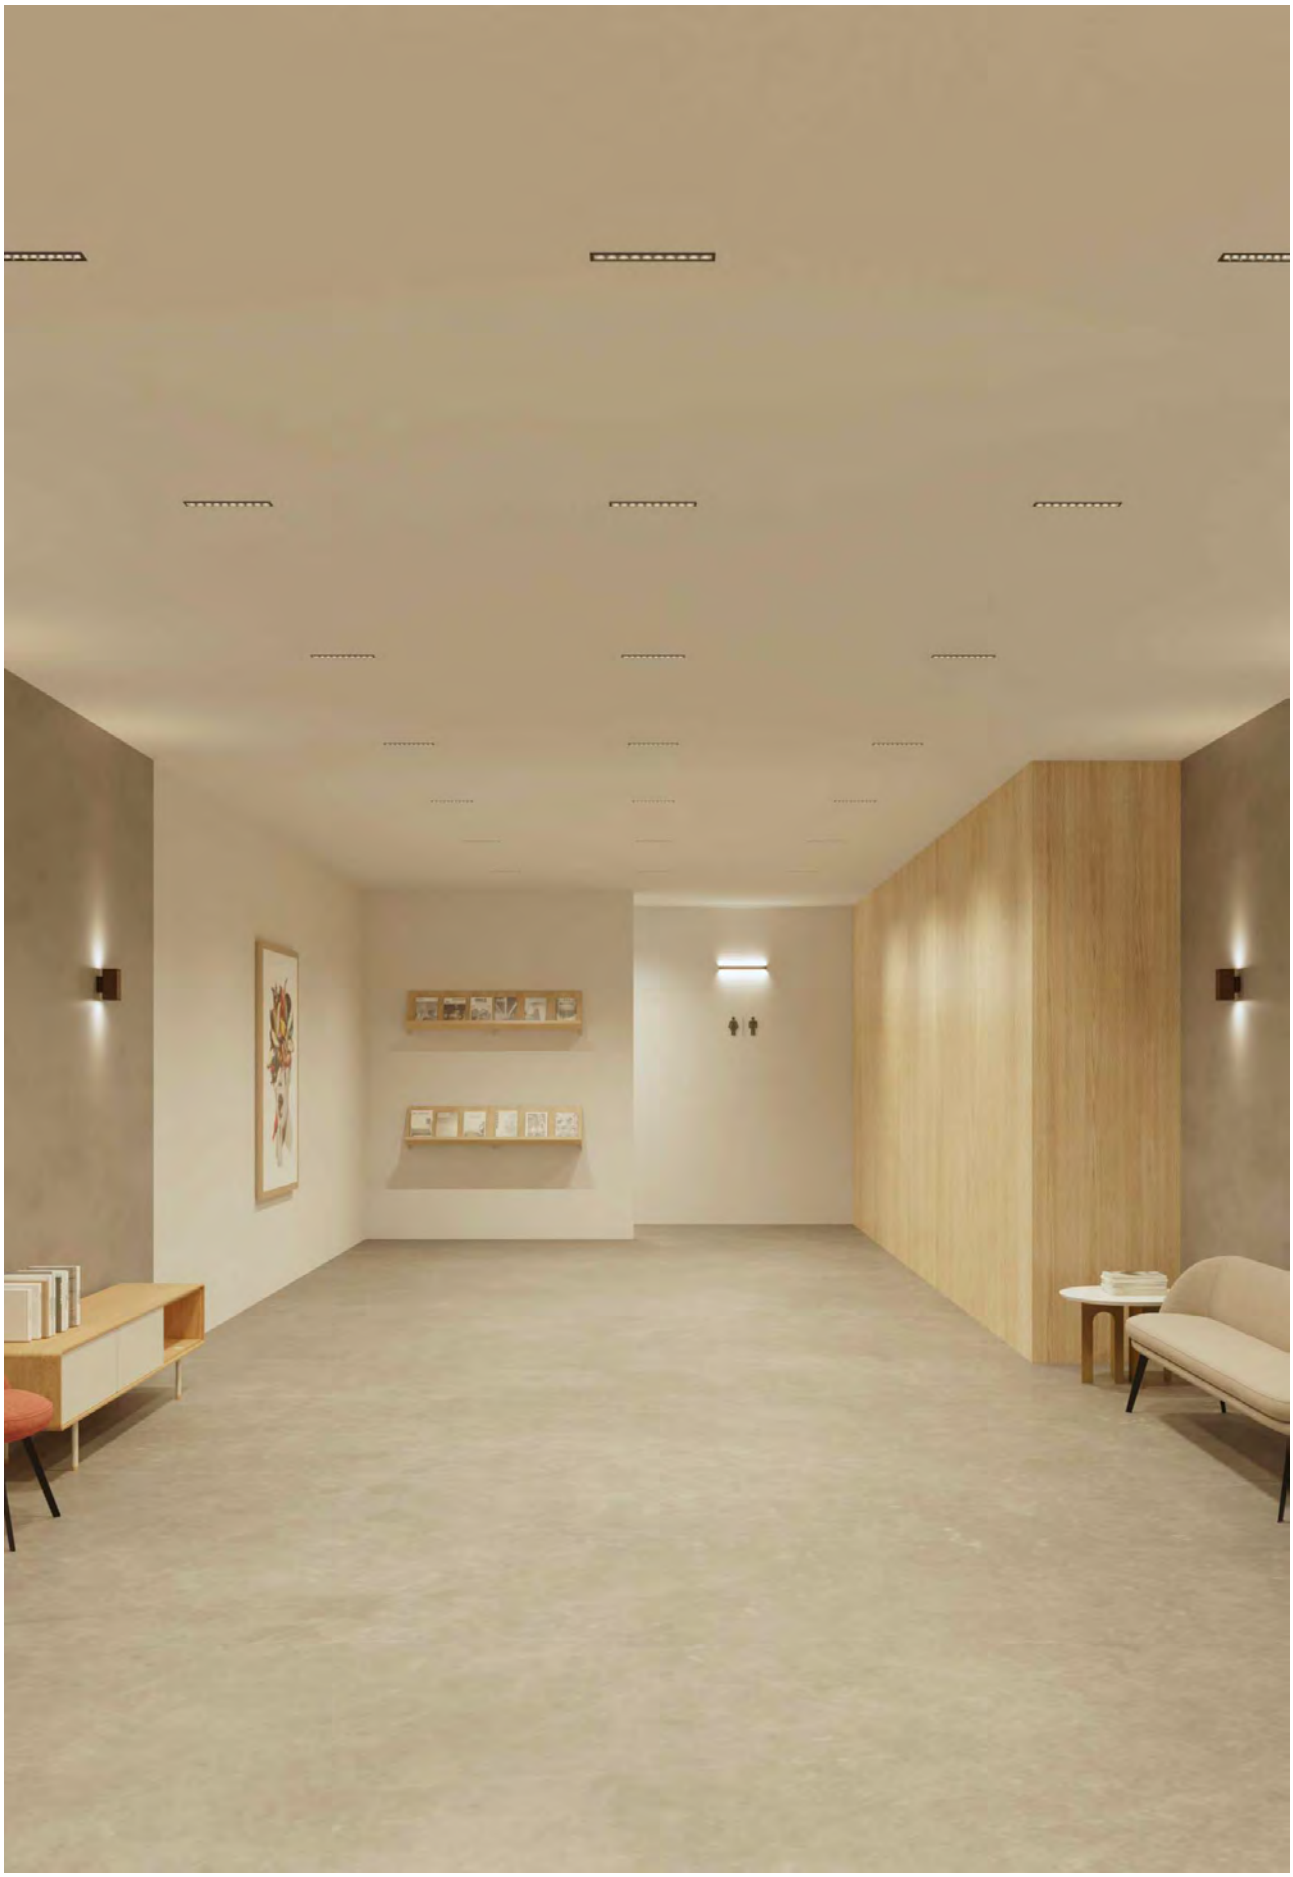



## Tao






## Technical Information

| | |
|---|---|
| Power | 10W |
| Installation | Recessed |
| Color Temperature | 3.000K / 4.000K |
| Lumens | 925 lm / 1.000 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 3.000K | 3942 |
| | ☐ | 4.000K | 3943 |
| | ■ | 3.000K | 3944 |
| | ■ | 4.000K | 3945 |
| ⓘ | | Custom RAL | |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 50.000 HOURS | IP 32 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | +40°C -20°C | 1/40




## Pulcom round






## Pulcom square






## Technical Information

| | Pulcom round | Pulcom square |
|---|---|---|
| Power | 8W | 8W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 800 lm | 800 lm |
| Material | Polycarbonate | Polycarbonate |
| Finishes | White / Black | White / Black |


| Code | | |
|---|---|---|
| | ☐ 4742 | ☐ 4744 |
| | ■ 4746 | ■ 4748 |
| | ⓘ Custom RAL | ⓘ Custom RAL |


CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/5/20

| Pulcom round asymmetric | Pulcom square asymmetric |
|---|---|
|  |  |




## Technical Information

| | | |
|---|---|---|
| Power | 8W | 8W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 800 lm | 800 lm |
| Material | Polycarbonate | Polycarbonate |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 4743 | ☐ 4745 |
| | ■ 4747 | ■ 4749 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS EAC


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/5/20



## Pulcom led








## Pulcom trim



Round trim





Square trim





## Pulcom asymmetric trim



Asymmetric round trim




Asymmetric square trim




## Technical Information

| | Pulcom led | Pulcom trim | Pulcom asymmetric trim |
|---|---|---|---|
| Power | 8W | - | - |
| Installation | Recessed | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | - | - |
| Lumens | 800 lm | - | - |
| Material | Polycarbonate | Polycarbonate | Polycarbonate |
| Finishes | White / Black | White / Black / Wood | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ 4763 | ☐ round 4761 | ☐ round asymmetric 4821 |
| | ■ 4764 | ■ round 4762 | ■ round asymmetric 4822 |
| | | ■ round 4935 | ☐ square asymmetric 4825 |
| | | ☐ square 4823 | ■ square asymmetric 4826 |
| | | ■ square 4824 | ⓘ Custom RAL |
| | | ⓘ Custom RAL | |

CCT SWITCH

CE RoHS EMC


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C -20°C | 1/5/20



## Pulcom surface accessory






*Need Pulcom led (page 348).

## Technical Information

| | |
|---|---|
| Installation | Surface |
| Material | Polycarbonate |
| Finishes | White / Black / Wood |

| | |
|---|---|
| Code | 5034 |
| | 5035 |
| | 5036 |
| ⓘ | Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 1/50





Pulcom surface accessory






Private Residence, Granollers (Spain). Construction: ABL Group. Design: Mon Arquitectura.


## Pulsar switch






## Pulsar






## Technical Information

| | Pulsar switch | Pulsar |
|---|---|---|
| Power | 8W | 8W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | 5.000K |
| Lumens | 780 lm / 800 lm / 840 lm | 860 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| Code | ☐ 5057 | ☐ 5.000K 4217 |
| | ■ 5058 | ■ 5.000K 4218 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CCT SWITCH

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,9 | CRI ≥85 | 40° | 50/60 Hz | TRIAC DIMM | RT 2012 REGLEMENTATION THERMIQUE | +45°C -20°C | 1/10/30


New


| Pulsar surface accessory | Pulsar asymmetric trim | Pulsar matt gold trim |
|---|---|---|











*Need Pulsar (page 355).

## Technical Information

| | | | |
|---|---|---|---|
| Installation | Surface | Recessed | Recessed |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black / White-matt gold /Black-matt gold | White-matt gold/Black-matt gold |
| Code | ☐ 5110 | ☐ 5059 | ▣ 5206 |
| | ■ 5111 | ■ 5060 | ▣ 5207 |
| | ⓘ Custom RAL | ▣ 5212 New | |
| | | ▣ 5213 New | |
| | | ⓘ Custom RAL | |
| | 1/20 | 1/50 | 1/50 |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY


SALOMON

## Nano pulsar round






## Nano pulsar square






## Technical Information

| | Nano pulsar round | Nano pulsar square |
|---|---|---|
| Power | 3,5W | 3,5W |
| Installation | Recessed | Recessed |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 170 lm / 180 lm / 200 lm | 170 lm / 180 lm / 200 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | Nano pulsar round | | Nano pulsar square |
|---|---|---|---|---|---|
| | ☐ | 2.700K | 4297 | ☐ 2.700K | 4451 |
| | ☐ | 3.000K | 4298 | ☐ 3.000K | 4452 |
| | ☐ | 4.000K | 4299 | ☐ 4.000K | 4453 |
| | ■ | 2.700K | 4300 | ■ 2.700K | 4454 |
| | ■ | 3.000K | 4301 | ■ 3.000K | 4455 |
| | ■ | 4.000K | 4302 | ■ 4.000K | 4456 |
| ⓘ | | Custom RAL | | ⓘ Custom RAL | |

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,5 | CRI ≥80 | 30° | 50/60 Hz | +40°C -20°C | 1/50



New


## Nano pulsar round matt gold trim






## Nano pulsar square matt gold trim






*Need Nano Pulsar (page 358).



### Technical Information

| | | |
|---|---|---|
| Installation | Recessed | Recessed |
| Material | Aluminium | Aluminium |
| Finishes | White-matt gold/Black-matt gold | White-matt gold/Black-matt gold |
| Code | 5208 | 5210 |
| | 5209 | 5211 |

CE RoHS

3 YEARS WARRANTY | 1/4/300



| Nano pulsar round surface accessory | Nano pulsar square surface accessory |
|---|---|
|  |  |
|  |  |
| *Not included | *Not included |
|  |  |
| 120mm | 120mm |
| Ø38mm | ☐40mm |

*Need Nano Pulsar (page 358).

## Technical Information

| | | |
|---|---|---|
| Installation | Surface | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| Code | ☐ 4410 | ☐ 4412 |
| | ■ 4411 | ■ 4413 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 1/50






New

## Oxo round dimmable









## Oxo square dimmable








## Technical Information

| | Oxo round dimmable | Oxo square dimmable |
|---|---|---|
| Power | 12W | 12W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.260 lm | 1.260 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 4457-D | ☐ 4459-D |
| | ■ 4458-D | ■ 4460-D |
| | ⓘ Custom RAL | ⓘ Custom RAL |

## Accessories



Included with:
4457-D / 4459-D



Included with:
4457-D / 4458-D / 4459-D / 4460-D

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥80 | | 15° 38° 60° | 50/60 Hz | TRIAC DIMM | | +50°C -20°C | CCT SWITCH | 1/20




## Mini oxo round 1






## Mini oxo square 1






## Technical Information

| | Mini oxo round 1 | Mini oxo square 1 |
|---|---|---|
| Power | 6W | 6W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 600 lm | 600 lm |
| Material | Polycarbonate | Polycarbonate |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 5061 | ☐ 5108 |
| | ■ 5062 | ■ 5109 |

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 42° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20





| Mini oxo square 2 | Mini oxo square 4 | Mini oxo square 6 |
|---|---|---|





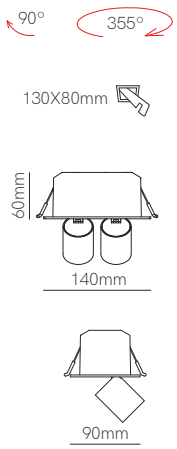

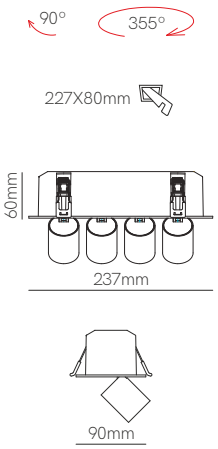
## Technical Information
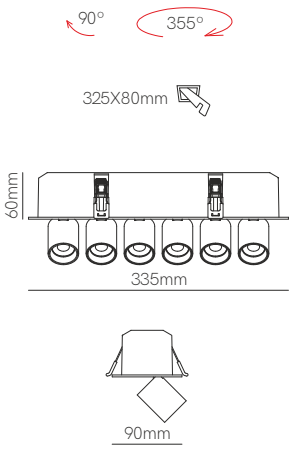
| | | | |
|---|---|---|---|
| Power | 12W | 24W | 36W |
| Installation | Recessed | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.200 lm | 2.400 lm | 3.600 lm |
| Material | Polycarbonate | Polycarbonate | Polycarbonate |
| Finishes | White / Black | White / Black | White / Black |

| Code | | | | | |
|---|---|---|---|---|---|
| | ☐ | 5063 | ☐ | 5065 | ☐ 5067 |
| | ■ | 5064 | ■ | 5066 | ■ 5068 |
| | | 1/10 | | 1/10 | 1/5 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 42° | 50/60 Hz | +40°C -20°C | CCT SWITCH






## Nano oxo round









## Nano oxo square








## Technical Information

| | Nano oxo round | Nano oxo square |
|---|---|---|
| Power | 4W | 4W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 380 lm | 380 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 4549 | ☐ 4550 |
| | ■ 4551 | ■ 4552 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | | 45° | 50/60 Hz | | +50°C -20°C | CCT SWITCH | 1/10/50






New


## Micro zoom






## Micro zoom large



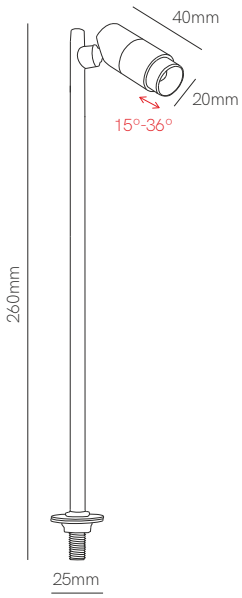


## Technical Information

| | Micro zoom | Micro zoom large |
|---|---|---|
| Power | 2W | 2W |
| Installation | Recessed | Recessed |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 70 lm | 70 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |


| Code | | | | | |
|---|---|---|---|---|---|
| | ☐ | 2.700K | 5273 | ☐ 2.700K | 5279 |
| | ☐ | 3.000K | 5274 | ☐ 3.000K | 5280 |
| | ☐ | 4.000K | 5275 | ☐ 4.000K | 5281 |
| | ■ | 2.700K | 5276 | ■ 2.700K | 5282 |
| | ■ | 3.000K | 5277 | ■ 3.000K | 5283 |
| | ■ | 4.000K | 5278 | ■ 4.000K | 5284 |
| | | | 1/100 | | 1/50 |

CE RoHS


3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 15°-36° | 50/60 Hz | +40°C -20°C

New

## Golf 200mm




## Golf 400mm

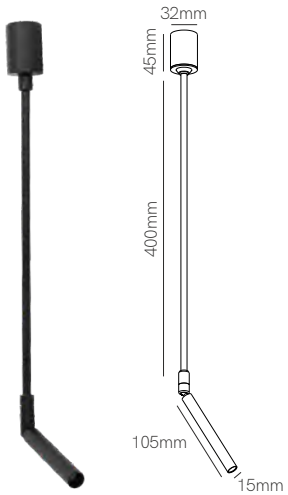


## Technical Information

| | Golf 200mm | Golf 400mm |
|---|---|---|
| Power | 3,5W | 3,5W |
| Installation | Surface | Surface |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 125 lm | 125 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |


| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 5285 | ☐ | 2.700K | 5291 |
| | ☐ | 3.000K | 5286 | ☐ | 3.000K | 5292 |
| | ☐ | 4.000K | 5287 | ☐ | 4.000K | 5293 |
| | ■ | 2.700K | 5288 | ■ | 2.700K | 5294 |
| | ■ | 3.000K | 5289 | ■ | 3.000K | 5295 |
| | ■ | 4.000K | 5290 | ■ | 4.000K | 5296 |

CE RoHS


3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C -20°C | 1/50

New

## Golf 600mm

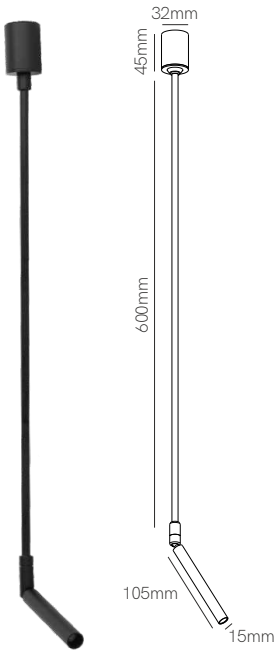


## Golf 800mm

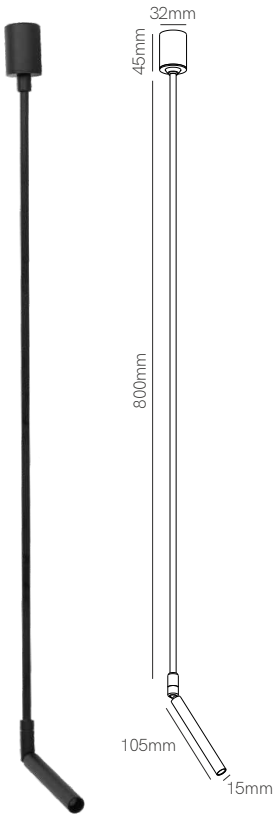


## Technical Information

| | Golf 600mm | Golf 800mm |
|---|---|---|
| Power | 3,5W | 3,5W |
| Installation | Surface | Surface |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 125 lm | 125 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 5297 | ☐ | 2.700K | 5303 |
| | ☐ | 3.000K | 5298 | ☐ | 3.000K | 5304 |
| | ☐ | 4.000K | 5299 | ☐ | 4.000K | 5305 |
| | ■ | 2.700K | 5300 | ■ | 2.700K | 5306 |
| | ■ | 3.000K | 5301 | ■ | 3.000K | 5307 |
| | ■ | 4.000K | 5302 | ■ | 4.000K | 5308 |

CE RoHS


3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C -20°C | 1/50



New

## Atom






## Technical Information

| | |
|---|---|
| Power | 2W |
| Installation | Recessed |
| Color Temperature | 2.700K / 3.000K / 4.000K |
| Lumens | 90 lm |
| Material | Aluminium |
| Finishes | White / Black |


| Code | | | |
|---|---|---|---|
| | ☐ | 2.700K | 5267 |
| | ☐ | 3.000K | 5268 |
| | ☐ | 4.000K | 5269 |
| | ■ | 2.700K | 5270 |
| | ■ | 3.000K | 5271 |
| | ■ | 4.000K | 5272 |


CE RoHS


3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C -20°C | 1/100



# Decorative lighting

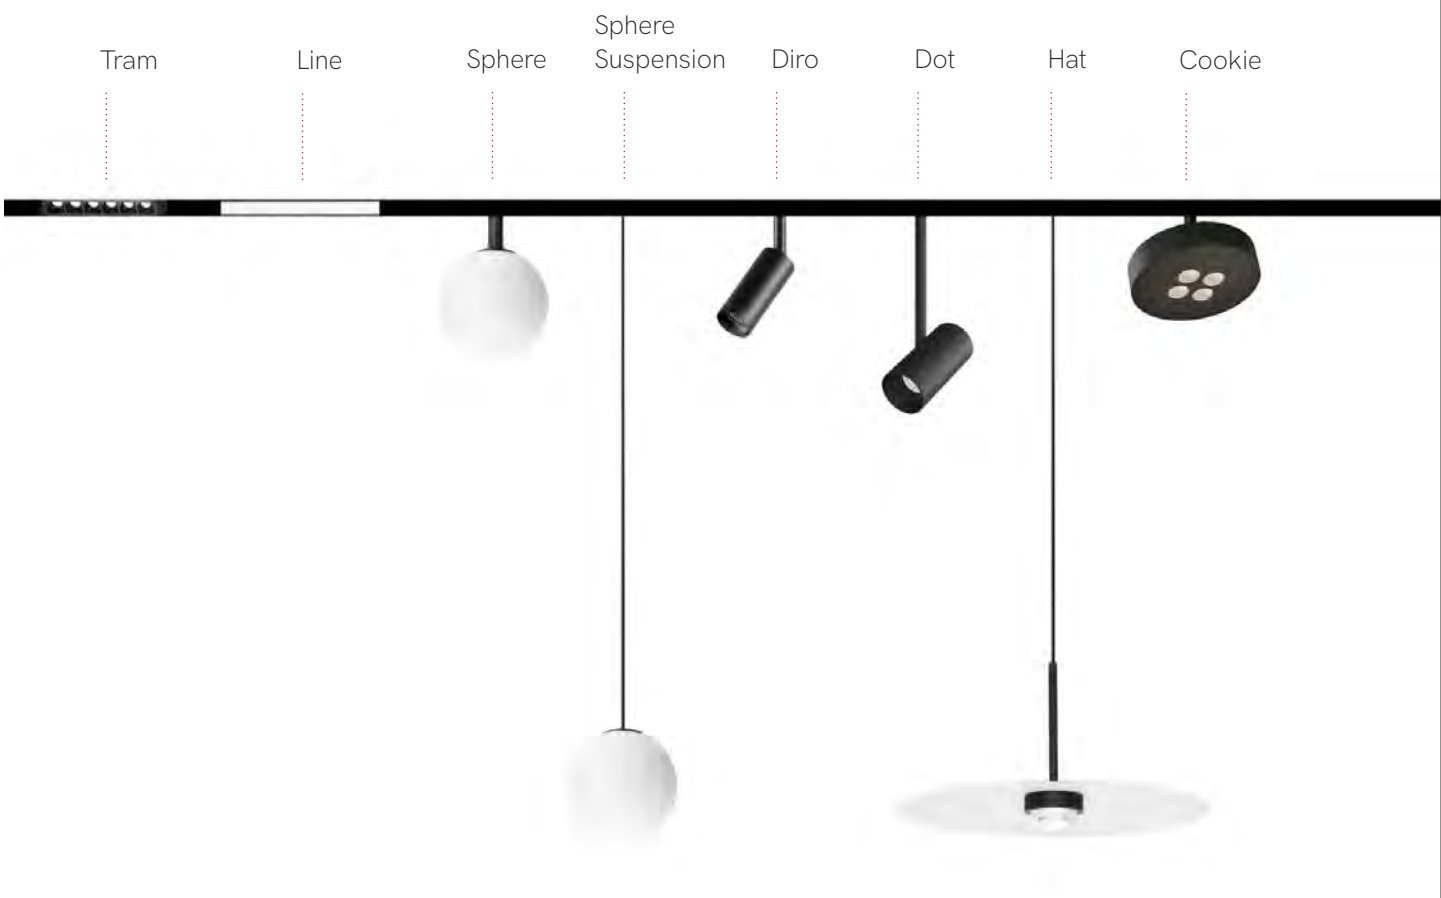
Tram
Line
Sphere
Sphere
Suspension
Diro
Dot
Hat
Cookie

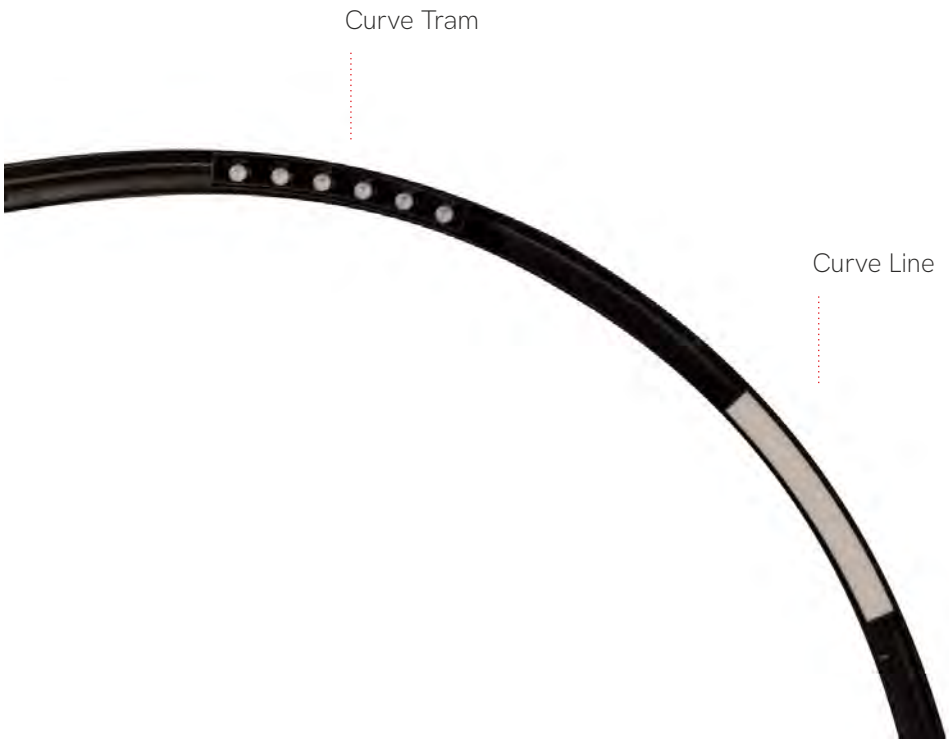
Curve Tram
Curve Line

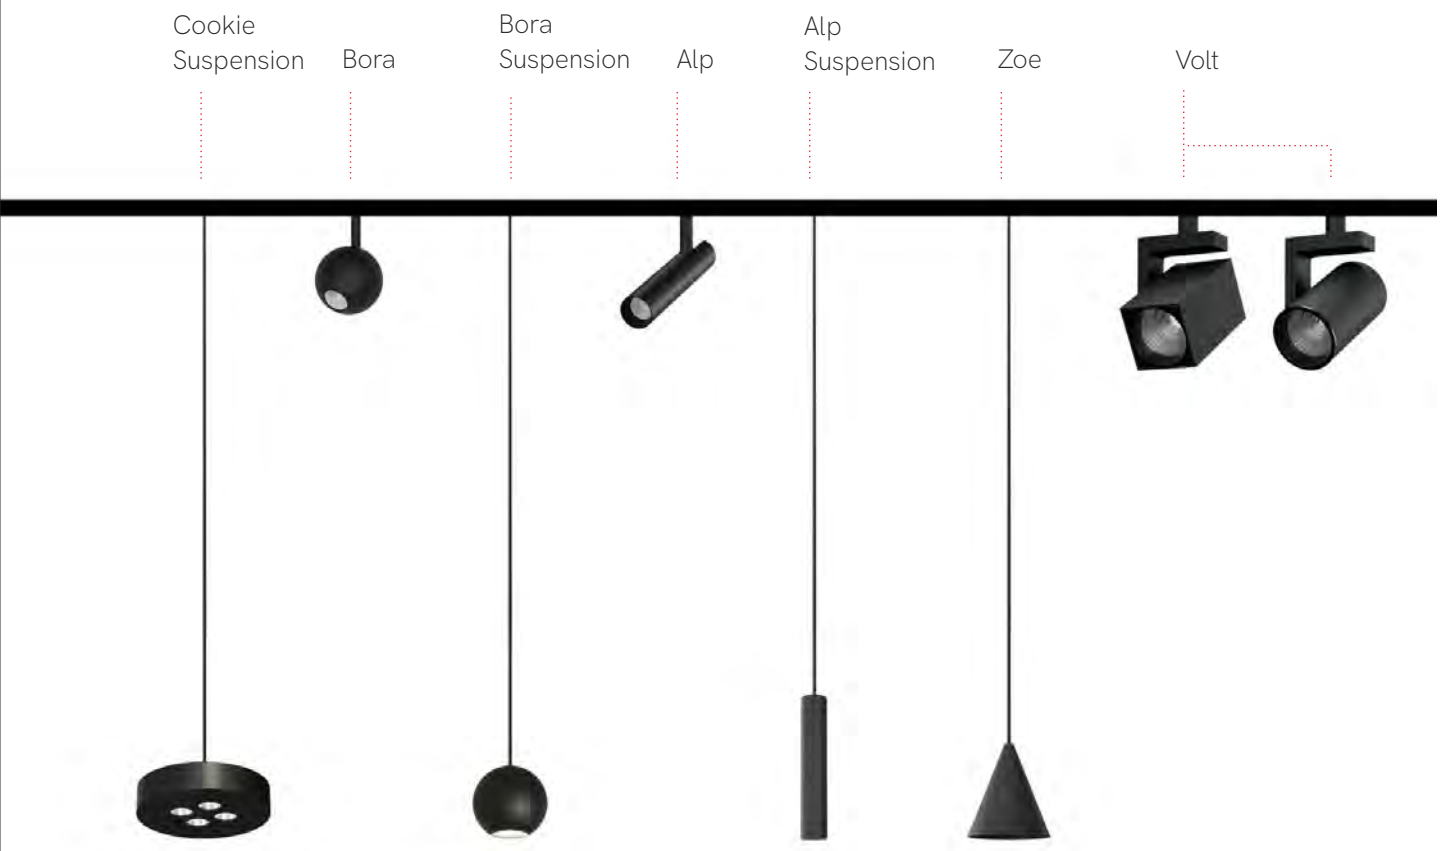


# 48V Magnet Track


Beneito Faure expands the collection for magnetic track and incorporates the curved  track, a current trend in decorative lighting.
Thanks to the magnetized system, the spotlights are easily coupled and illuminate when they come into contact with the track.

Beneito Faure amplía la colección para carril magnético e incorpora el carril curvo, tendencia actual en iluminación decorativa.
Gracias al sistema imantado los focos se acoplan de forma sencilla y se iluminan cuando entran en contacto con el carril.




## Tram 48V 4,5W






## Tram 48V 9W






*Need power supply (page 408).

## Technical Information

| | | |
|---|---|---|
| Power | 4,5W | 9W |
| Installation | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 300 lm / 310 lm | 690 lm / 710 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 4776 | ☐ | 2.700K | 4780 |
| | ☐ | 3.000K | 4777 | ☐ | 3.000K | 4781 |
| | ■ | 2.700K | 4778 | ■ | 2.700K | 4782 |
| | ■ | 3.000K | 4779 | ■ | 3.000K | 4783 |


CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | 24° | +40°C -20°C | 1/50




## Line 48V 7,5W







## Line 48V 15W






## Line 48V 30W






*Need power supply (page 408).

### Technical Information

| | | |
|---|---|---|
| Power | 7,5W | 15W | 30W |
| Installation | Magnet Track | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 310 lm / 320 lm | 740 lm / 760 lm | 1.000 lm / 1.050 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | Black | Black | Black |

| Code | | | | |
|---|---|---|---|---|
| | 2.700K | 5202 | New | |
| | 3.000K | 4784 | | |
| | 1/25 | | | |
| | 2.700K | 5203 | New | |
| | 3.000K | 4785 | | |
| | 1/25 | | | |
| | 2.700K | 5204 | New | |
| | 3.000K | 4786 | | |
| | 1/20 | | | |


CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 100° | +40°C -20°C

New


## Curve tram 48V






## Curve line 48V






*Need power supply (page 408).

### Technical Information

| | | |
|---|---|---|
| Power | 6W | 8W |
| Installation | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 500 lm | 300 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 5309 | ☐ | 2.700K | 5313 |
| | ☐ | 3.000K | 5310 | ☐ | 3.000K | 5314 |
| | ■ | 2.700K | 5311 | ■ | 2.700K | 5315 |
| | ■ | 3.000K | 5312 | ■ | 3.000K | 5316 |
| | | | 36° | | | 100° |


CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | +40°C -20°C | 1/40


New


## Sphere 48V






## Sphere suspension 48V

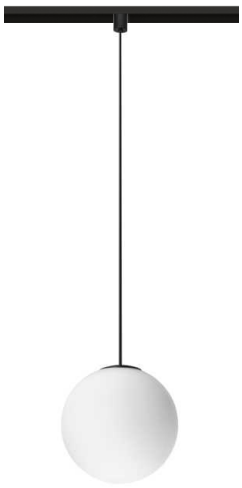




*Need power supply (page 408).

## Technical Information

| | Sphere 48V | Sphere suspension 48V |
|---|---|---|
| Power | 8W | 8W |
| Installation | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 255 lm | 255 lm |
| Material | Aluminium and glass | Aluminium and glass |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 5369 | ☐ | 2.700K | 5375 |
| | ☐ | 3.000K | 5370 | ☐ | 3.000K | 5376 |
| | ■ | 2.700K | 5372 | ■ | 2.700K | 5378 |
| | ■ | 3.000K | 5373 | ■ | 3.000K | 5379 |


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 360° | +40°C -20°C | 1/12



## Cookie 48V







New


## Cookie 48V







New

## Cookie suspension 48V

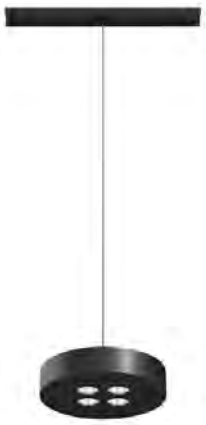




*Need power supply (page 408).

## Technical Information

| | Cookie 48V | Cookie 48V | Cookie suspension 48V |
|---|---|---|---|
| Power | 12W | 12W | 12W |
| Installation | Magnet Track | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | Dali 2.700K - 4.000K | Dali 2.700K - 4.000K |
| Lumens | 940 lm / 950 lm | 500 lm - 700 lm | 500 lm - 700 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |

| Code | Cookie 48V | Cookie 48V | Cookie suspension 48V |
|---|---|---|---|
| | ☐ 2.700K 4772 | ☐ 5181 | ☐ 5185 |
| | ☐ 3.000K 4773 | ■ 5182 | ■ 5186 |
| | ■ 2.700K 4774 | ⓘ Custom RAL | ⓘ Custom RAL |
| | ■ 3.000K 4775 | | |
| | ⓘ Custom RAL | | |
| | 26.000 HOURS | 30.000 HOURS \| DALI 2 | 30.000 HOURS \| DALI 2 |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C -20°C | 1/20







To Kill a Mockingbird
To Kill a Mockingbird
To Kill a Mockingbird

## Dot 48V






*Need power supply (page 408).

### Technical Information

| | |
|---|---|
| Power | 11W |
| Installation | Magnet Track |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 680 lm / 690 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 2.700K | 4768 |
| | ☐ | 3.000K | 4769 |
| | ■ | 2.700K | 4770 |
| | ■ | 3.000K | 4771 |
| ⓘ | | Custom RAL | |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 35° | +40°C -20°C | 1/20




## Bora 48V






## Bora 48V suspension






*Need power supply (page 408).

## Technical Information

| | Bora 48V | Bora 48V suspension |
|---|---|---|
| Power | 4,5W | 8,5W |
| Installation | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 315 lm / 325 lm | 610 lm / 620 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome / Rose gold | White / Back / Chrome / Rose gold |

| Code | | | | | |
|---|---|---|---|---|---|
| | ☐ | 2.700K | 4581 | ☐ 2.700K | 4573 |
| | ☐ | 3.000K | 4582 | ☐ 3.000K | 4574 |
| | ■ | 2.700K | 4583 | ■ 2.700K | 4575 |
| | ■ | 3.000K | 4584 | ■ 3.000K | 4576 |
| | ■ | 2.700K | 4585 | ■ 2.700K | 4577 |
| | ■ | 3.000K | 4586 | ■ 3.000K | 4578 |
| | ■ | 2.700K | 4587 | ■ 2.700K | 4579 |
| | ■ | 3.000K | 4588 | ■ 3.000K | 4580 |
| | | | UGR <10 \| 38° | | UGR <15 \| 36° |


CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | CRI ≥93 | III | +40°C -20°C | 1/18




## Alp 48V






## Alp suspension 48V






*Need power supply (page 408).

## Technical Information

| | | |
|---|---|---|
| Power | 4,5W | 4,5W |
| Installation | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 260 lm / 270 lm | 260 lm / 270 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 4787 | ☐ | 2.700K | 4791 |
| | ☐ | 3.000K | 4788 | ☐ | 3.000K | 4792 |
| | ■ | 2.700K | 4789 | ■ | 2.700K | 4793 |
| | ■ | 3.000K | 4790 | ■ | 3.000K | 4794 |
| | ⓘ | Custom RAL | | ⓘ | Custom RAL | |
| | 1/20 | | | 1/25 | | |


CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C -20°C

## Zoe 48V



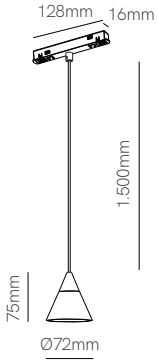


*Need power supply (page 408).

### Technical Information

| | |
|---|---|
| Power | 7W |
| Installation | Magnet Track |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 360 lm / 370 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 2.700K | 4795 |
| | ☐ | 3.000K | 4796 |
| | ■ | 2.700K | 4797 |
| | ■ | 3.000K | 4798 |
| ⓘ | | Custom RAL | |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | 38° | +40°C -20°C | 1/36

New

## Hat 48V



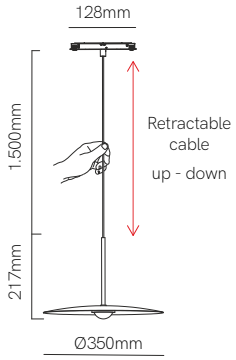


*Need power supply (page 408).

### Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Magnet Track |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 835 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 2.700K | 5363 |
| | ☐ | 3.000K | 5364 |
| | ■ | 2.700K | 5366 |
| | ■ | 3.000K | 5367 |


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | CRI ≥90 | 83° | +40°C -20°C | 1/5




## Volt round 48V






## Volt square 48V






*Need power supply (page 408).

## Technical Information

| | Volt round 48V | Volt square 48V |
|---|---|---|
| Power | 8W | 8W |
| Installation | Magnet Track | Magnet Track |
| Color Temperature | Dali 2.700K - 4.000K | Dali 2.700K - 4.000K |
| Lumens | 570 lm | 570 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 5037 | ☐ 5039 |
| | ■ 5038 | ■ 5040 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | CRI ≥90 | 38° | IK06 | +45°C -20°C | DALI 2 | 1/20






New

## Diro







*Need power supply (page 408).

## Technical Information

| | |
|---|---|
| Power | 7W |
| Installation | Magnet Track |
| Color Temperature | Dali 2.700K - 6.500K |
| Lumens | 420 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5239 |
| | ■ 5238 |

## Accessories



Honeycomb anti-glare
(Included)


CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 48V DC | UGR <10 | CRI ≥90 | 36° | +40°C -20°C | DALI 2 | 1/20

New

## Fine 25 circle 48V






*Need power supply (page 408).

### Technical Information

| | |
|---|---|
| Power | 19W |
| Installation | Magnet Track |
| Color Temperature | 3.000K / 4.000K |
| Lumens | 850 lm /950 lm |
| Finishes | Aluminium / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 3.000K | 5431 |
| | ☐ | 4.000K | 5441 |
| | ■ | 3.000K | 5432 |
| | ■ | 4.000K | 5442 |

CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 48V DC | CRI ≥90 | 360° | +40°C -20°C | 1

# Casambi magnet track control New

472x CASAMBI is a master DALI device, using Bluetooth technology, suitable for monomaster applications, developed to control DALI lamps via mobile devices, using the Casambi app. 64 lamps (control gear) can be programmed, and assigned to up to 8 groups.

Power supply 24Vdc to 48Vdc, not polarized. Fused and protected against voltage peaks.
Two automatic programming modes, Standard and Fast Group, to program new lamps found on the bus.


Allows for the connection of up to 64 DALI lamps (control gear), assigning them to up to 8 groups.
Fixtures available for: Broadcast control, 8 groups, 4 TW groups.
The lamps on the bus are controlled by means of group commands: each lamp will execute only commands sent to its belonging group.


472x CASAMBI es un dispositivo maestro DALI, con tecnología Bluetooth, adecuado para aplicaciones monomáster, está desarrollado para controlar lámparas DALI a través de dispositivos móviles, utilizando la app Casambi.
Se pueden programar 64 lámparas (equipo de control) y asignarlas a hasta un máximo de 8 grupos.

Fuente de alimentación de 24 Vdc a 48 Vdc, no polarizada, fusionada y protegida contra picos de voltaje. Dos modos de programación automática, Estándar y Grupo Rápido, para programar nuevas lámparas que se encuentren en el bus.

Permite la conexión de hasta 64 lámparas DALI (equipos auxiliares), asignándolas a un máximo de 8 grupos.
Dispositivos disponibles para: Control de difusión, 8 grupos, 4 grupos TW.
Las lámparas del bus se controlan mediante comandos de grupo: cada lámpara ejecutará sólo los comandos enviados a su grupo de pertenencia.





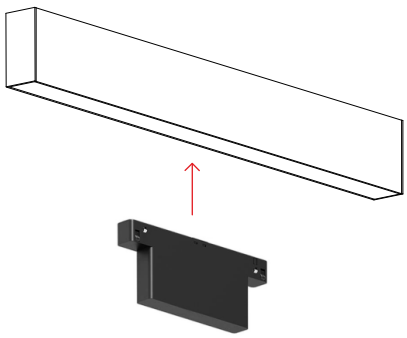



| Code | Version | Power | IP | VDC OUT | Size |
|---|---|---|---|---|---|
| ☐ 6721 | Casambi magnet track control | 8W | IP20 | 24-48 VDC | 142x58x18mm |
| ■ 6722 | Casambi magnet track control | 8W | IP20 | 24-48 VDC | 142x58x18mm |

CE RoHS

3 YEARS WARRANTY | 24-48V DC | DALI 2 | +40°C -20°C | 1

# Magnet track accessories

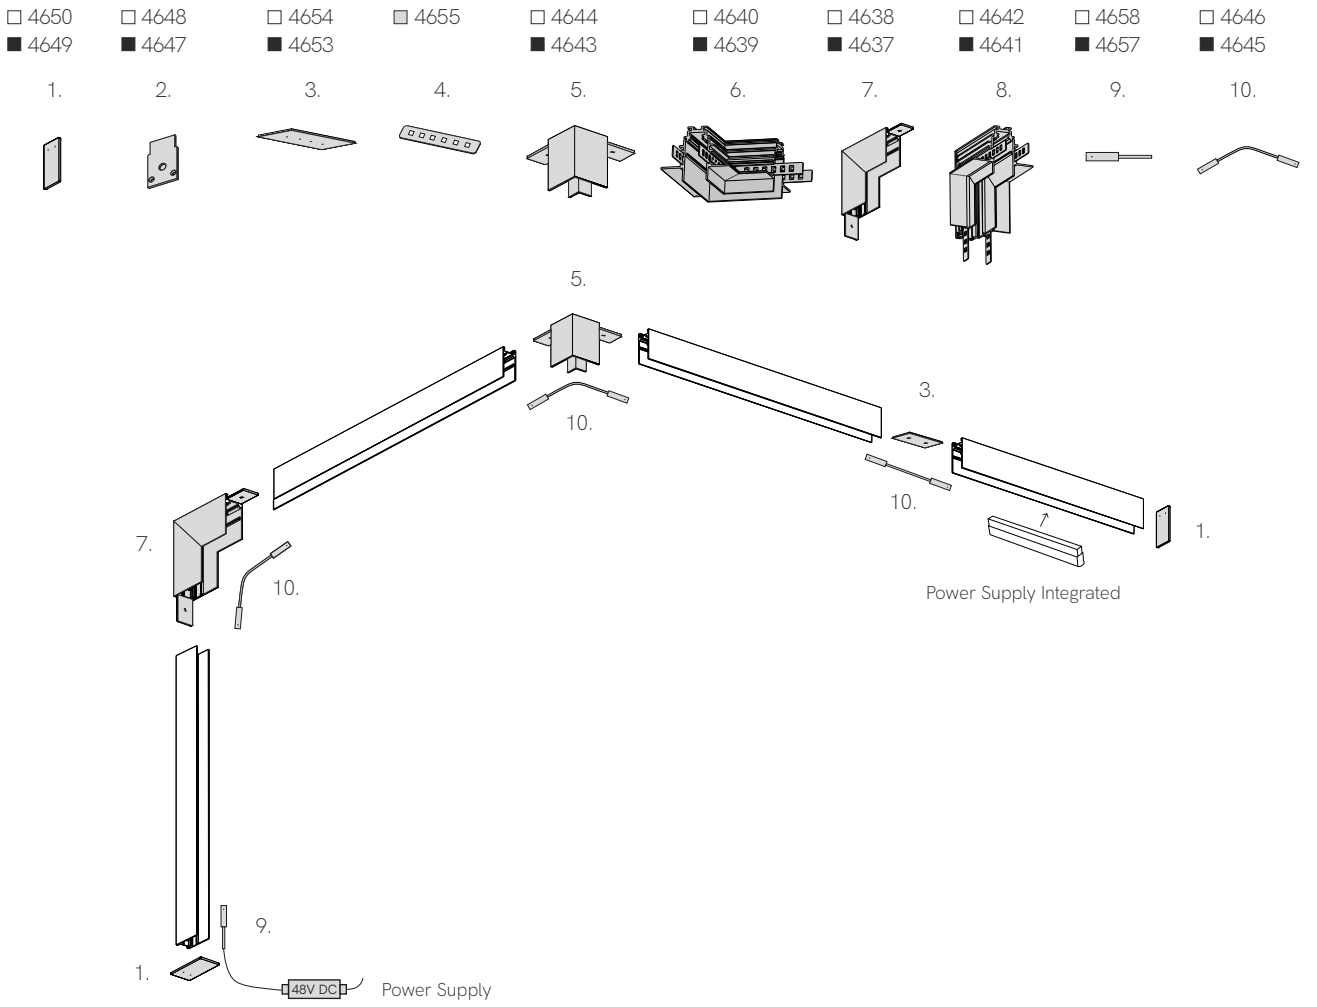


CE RoHS EMC

3 YEARS WARRANTY | IP 20

# Power Supplies 48V

| Code | | Version | Power | IP | VDC OUT | Size |
|---|---|---|---|---|---|---|
| 4711 | ■ | Power Supply Basic | 60W | IP67 | 48 VDC | 150x53x36mm |
| 4707 | ☐ | Power Supply Top | 150W | IP65 | 48 VDC | 219x63x35mm |
| 4708 | ☐ | Power Supply Top | 240W | IP65 | 48 VDC | 244x71x37mm |
| 5139 | ☐ | Power Supply Dali | 90W | IP67 | 48 VDC | 171x63x38mm |
| 5140 | ☐ | Power Supply Dali | 200W | IP67 | 48 VDC | 191x68x40mm |
| 6023 | ■ New | Power Supply Integrated | 100W | IP20 | 48 VDC | 325x23x43mm |
| 6024 | ■ New | Power Supply Integrated | 150W | IP20 | 48 VDC | 325x23x43mm |
| 6025 | ■ New | Power Supply Integrated | 250W | IP20 | 48 VDC | 390x23x43mm |

5 YEARS WARRANTY | 100-240 VAC | Basic Dali | Top | PF >0,9 |



## Magnet track surface
W: 26mm H: 53mm

| | | |
|---|---|---|
| ☐ | 1m | 4660 |
| ☐ | 2m | 4662 |
| ■ | 1m | 4659 |
| ■ | 2m | 4661 |



## Magnet track recessed
W: 72mm x H: 55mm

| | | |
|---|---|---|
| ☐ | 1m | 4664 |
| ☐ | 2m | 4666 |
| ■ | 1m | 4663 |
| ■ | 2m | 4665 |





## End cap surface
L: 53mm W: 26.6mm H: 2mm

| | |
|---|---|
| ☐ | 4650 |
| ■ | 4649 |




## End cap recessed
L: 52mm W: 32mm H: 2mm

| | |
|---|---|
| ☐ | 4648 |
| ■ | 4647 |





## L joint wall ceiling surface
L: 100mm W: 100mm H: 26mm

| | |
|---|---|
| ☐ | 4638 |
| ■ | 4637 |




## L joint wall ceiling recessed
L: 100mm W: 100mm H: 72mm

| | |
|---|---|
| ☐ | 4642 |
| ■ | 4641 |




## L joint ceiling surface
L: 40mm W: 40mm H: 53mm

| | |
|---|---|
| ☐ | 4644 |
| ■ | 4643 |




## L joint ceiling recessed
L: 100mm W: 100mm H: 55mm

| | |
|---|---|
| ☐ | 4640 |
| ■ | 4639 |



New

## Curve magnet track surface
W: 26mm H: 53mm

| | | |
|---|---|---|
| ☐ | R500 1/4 | 5317 |
| ■ | R500 1/4 | 5319 |



New

## Curve track end cap
L: 53mm W: 26.6mm H: 2mm

| | |
|---|---|
| ☐ | 5428 |
| ■ | 5427 |



## Linear joint surface
L: 80mm W: 22.5mm H: 2mm

| | |
|---|---|
| ☐ | 4654 |
| ■ | 4653 |




## Linear joint recessed
L: 70mm W: 11.5mm H: 1mm

| | |
|---|---|
| ■ | 4655 |



## Start connector
L: 98mm W: 18mm H: 18mm

| | |
|---|---|
| ☐ | 4658 |
| ■ | 4657 |



## Central corner connector
L: 98mm W: 18mm H: 18mm

| | |
|---|---|
| ☐ | 4646 |
| ■ | 4645 |



## PVC trim
W: 26.8mm H: 3.5mm

| | | |
|---|---|---|
| ■ | 1m | 4651 |
| ■ | 2m | 4652 |



## Suspension kit
L: 45mm W: 22mm | Ø15mm H: 1.900mm

| | |
|---|---|
| ■ | 4807 |

# Create your own design with **Space**

Space is a lighting concept that seeks to be part of the design and finishes of a room. This lighting system creates an unlimited number of lines and compositions that are born out of a surface base. The final design is left to the user, who can select and customize the distribution of the luminaire in the space.

Space es un concepto de iluminación que busca formar parte del diseño y acabados de un espacio. Este sistema de iluminación crea trazos y composiciones ilimitadas que nacen de una base de superficie. El diseño final queda en manos del usuario, el cual puede escoger y personalizar como distribuye la luminaria a través del espacio.



This innovative system allows you to create spectacular vertical suspended compositions by means of a unique and incomparable design. With our decorative spotlights it is possible to create entirely customizable light points at different heights. The Space system, supported by a thread up to six meters long, is compatible with Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL and Lievo XL decorative products. Choose the size of the base that best suits the composition among different diameters and create your own luminaire.

Este innovador sistema permite crear composiciones colgantes verticales espectaculares a través de un diseño único e irrepetible. Con nuestros spotlights decorativos es posible crear puntos de luz a distintas alturas totalmente personalizables. El sistema Space, sostenido por un hilo de hasta seis metros de largo, es compatible con los productos decorativos Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL y Lievo XL. Escoge el tamaño de la base que mejor se adapte a la composición entre distintos diámetros y crea tu propia luminaria.








The light points of the Space system can be moved away from the base and brought to any place desired though the wire holder. It is a piece that is mounted on the surface of the ceiling to support the conductor wire of the lighting structure. This system of hanging lamps gives total freedom to architects and interior designers to create repetitions of light that can compose from chaotic structures to the most symmetrical. If you have a false ceiling where the driver can rest, you can use the system with the individual recessed base, a great option for integrating the structure in an elegant way.


Los puntos de luz del sistema Space pueden alejarse de la base y llevarse a cualquier ubicación deseada a través del wire holder. Se trata de una pieza que se instala en la superficie del techo para sostener el hilo conductor de la estructura lumínica. Este sistema de lámparas colgantes ofrece una total libertad a arquitectos e interioristas para crear repeticiones de luz que pueden componer desde estructuras caóticas, hasta las más simétricas. En caso de contar con un falso techo donde pueda reposar el driver, puedes usar el sistema con la base individual de encastrar, una muy buena opción para integrar de forma elegante la estructura.



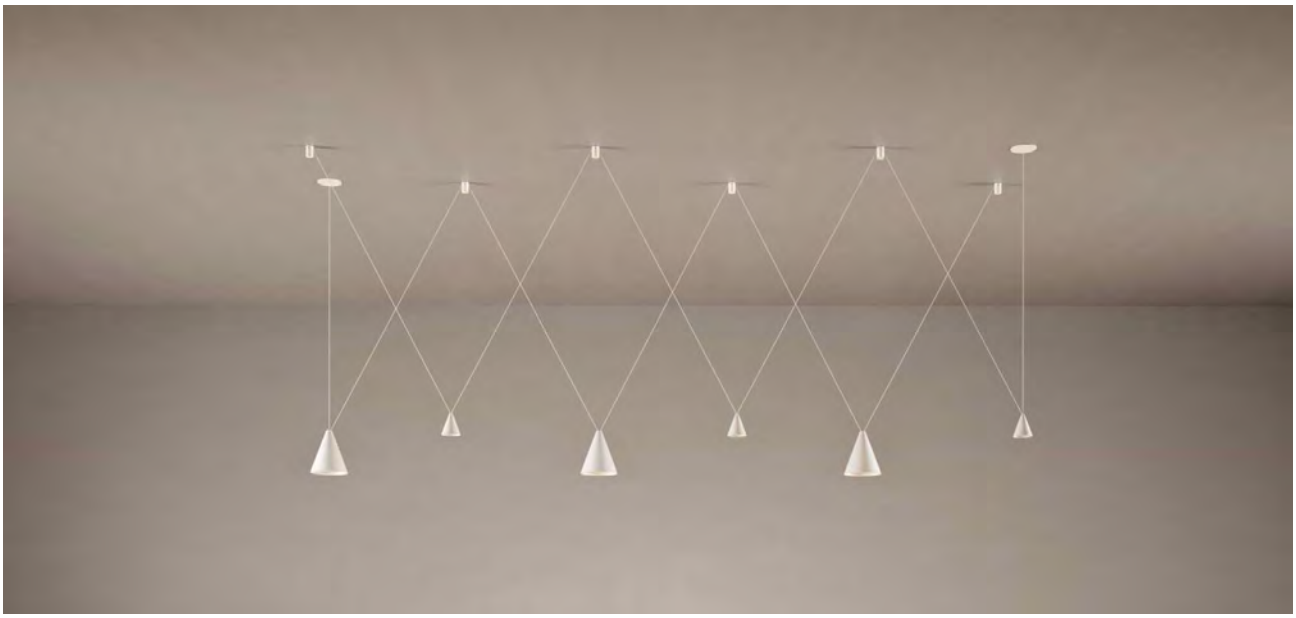

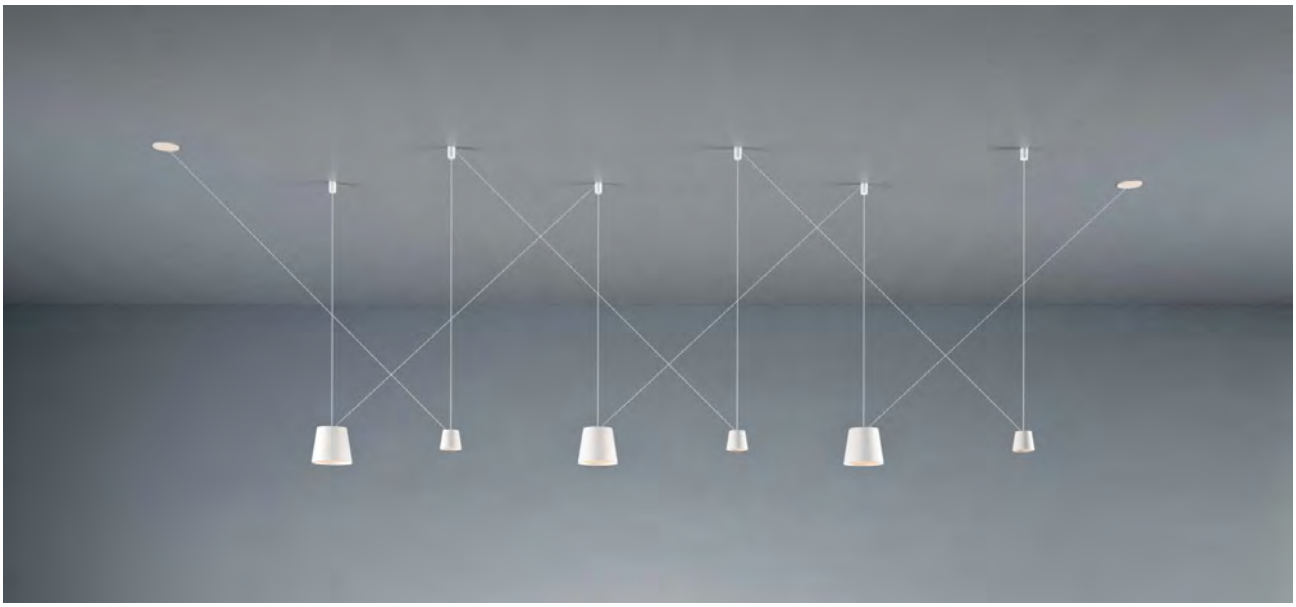

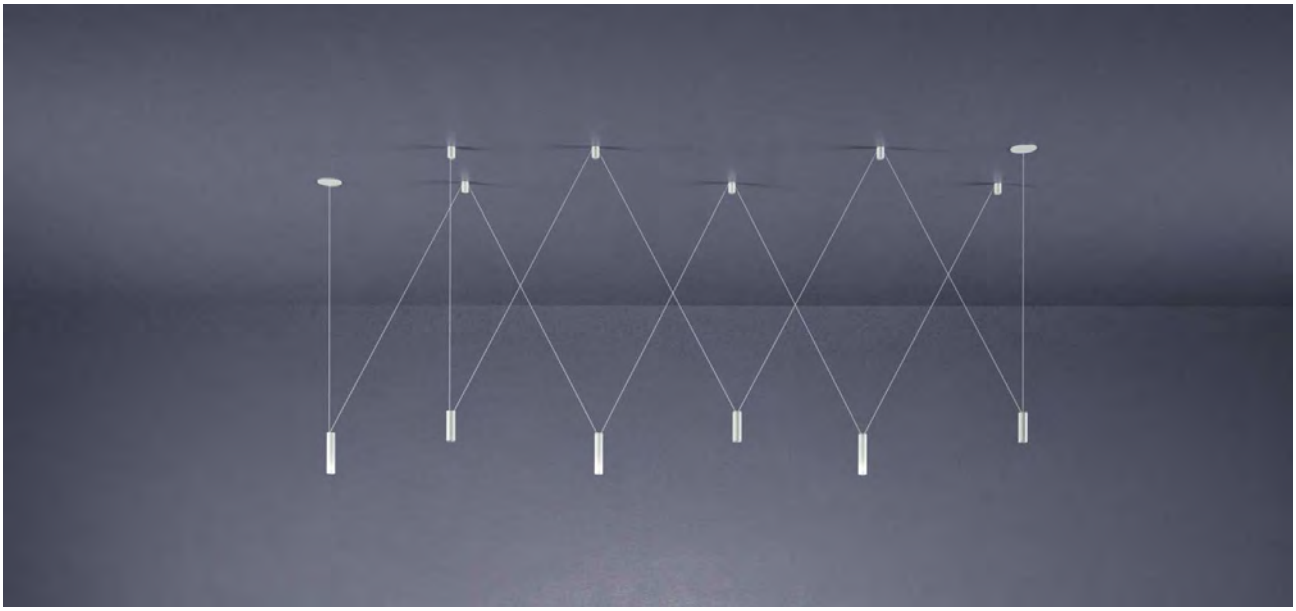

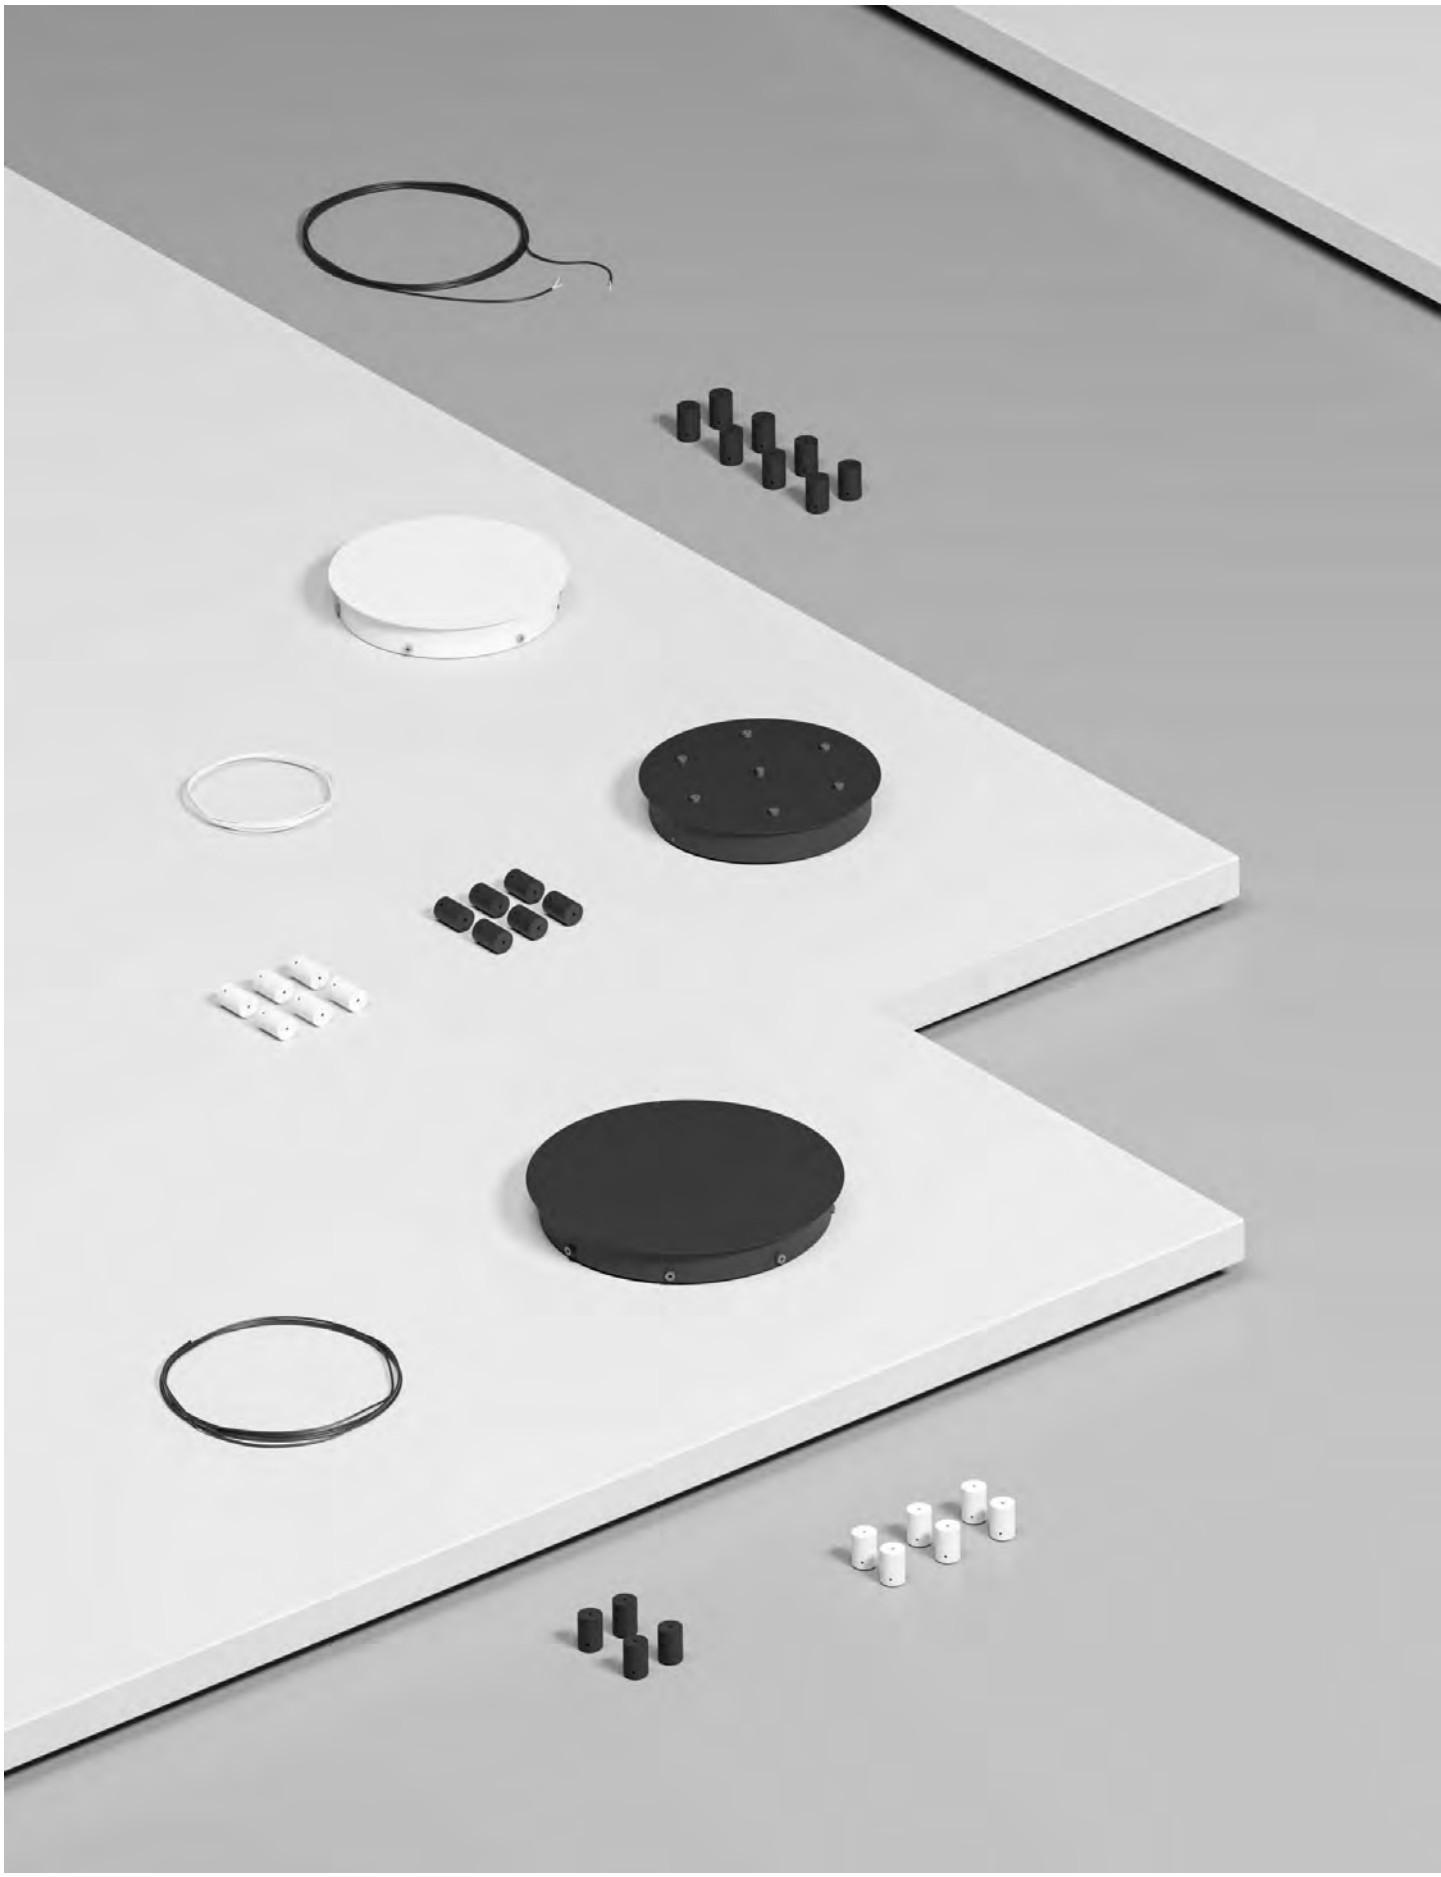


▶ VIDEO

# Side base

## Base Ø250x41mm



| Code | |
|---|---|
| Code | **S1** |

| Product | |
|---|---|
| Bora | **1** |
| Zoe | **3** |
| Lievo | **5** |
| Alp | **7** |
| Nano Alp | **8** |

| Units | |
|---|---|
| 2 units | **2** |
| 3 units | **3** |
| 4 units | **4** |
| 5 units | **5** |
| 6 units | **6** |

| Driver | |
|---|---|
| On / Off | **1** |
| Dali | **2** |
| Triac | **3** |
| Casambi | **5** |

| Color | |
|---|---|
| ☐ White | **1** |
| ■ Black | **2** |
| ⓘ Custom RAL | |

Code: **S1**

## Base Ø280x41mm



| Code | |
|---|---|
| Code | **S2** |

| Product | |
|---|---|
| Bora | **1** |
| Zoe | **3** |
| Lievo | **5** |
| Alp | **7** |
| Nano Alp | **8** |

| Units | |
|---|---|
| 2 units | **2** |
| 3 units | **3** |
| 4 units | **4** |
| 5 units | **5** |
| 6 units | **6** |

| Driver | |
|---|---|
| On / Off | **1** |
| Dali | **2** |
| Triac | **3** |
| Casambi | **5** |

| Color | |
|---|---|
| ☐ White | **1** |
| ■ Black | **2** |
| ⓘ Custom RAL | |

Code: **S2**

## Base Ø330x41mm



| Code | |
|---|---|
| Code | **S3** |

| Product | |
|---|---|
| Bora | **1** |
| Bora XL | **2** |
| Zoe | **3** |
| Zoe XL | **4** |
| Lievo | **5** |
| Lievo XL | **6** |
| Alp | **7** |
| Nano Alp | **8** |

| Units | |
|---|---|
| 2 units | **2** |
| 3 units | **3** |
| 4 units | **4** |
| 5 units | **5** |
| 6 units | **6** |
| 7 units | **7** |
| 8 units | **8** |

| Driver | |
|---|---|
| On / Off | **1** |
| Dali | **2** |
| Triac | **3** |
| Casambi | **5** |

| Color | |
|---|---|
| ☐ White | **1** |
| ■ Black | **2** |
| ⓘ Custom RAL | |

Code: **S3**

ⓘ Consult delivery terms and conditions.

## Accessories



Wire holder
☐ 5106
■ 5107




Aditional wire (1m). Max. length 6m
☐ 5128
■ 5129

CE RoHS

*Create your code acording to your preferences. For other finishing please consult.

3 YEARS WARRANTY | IP 20 | 220/240 VAC | PF >0,9 | 50/60 Hz | TRIAC DIMM | DALI 2 | 1



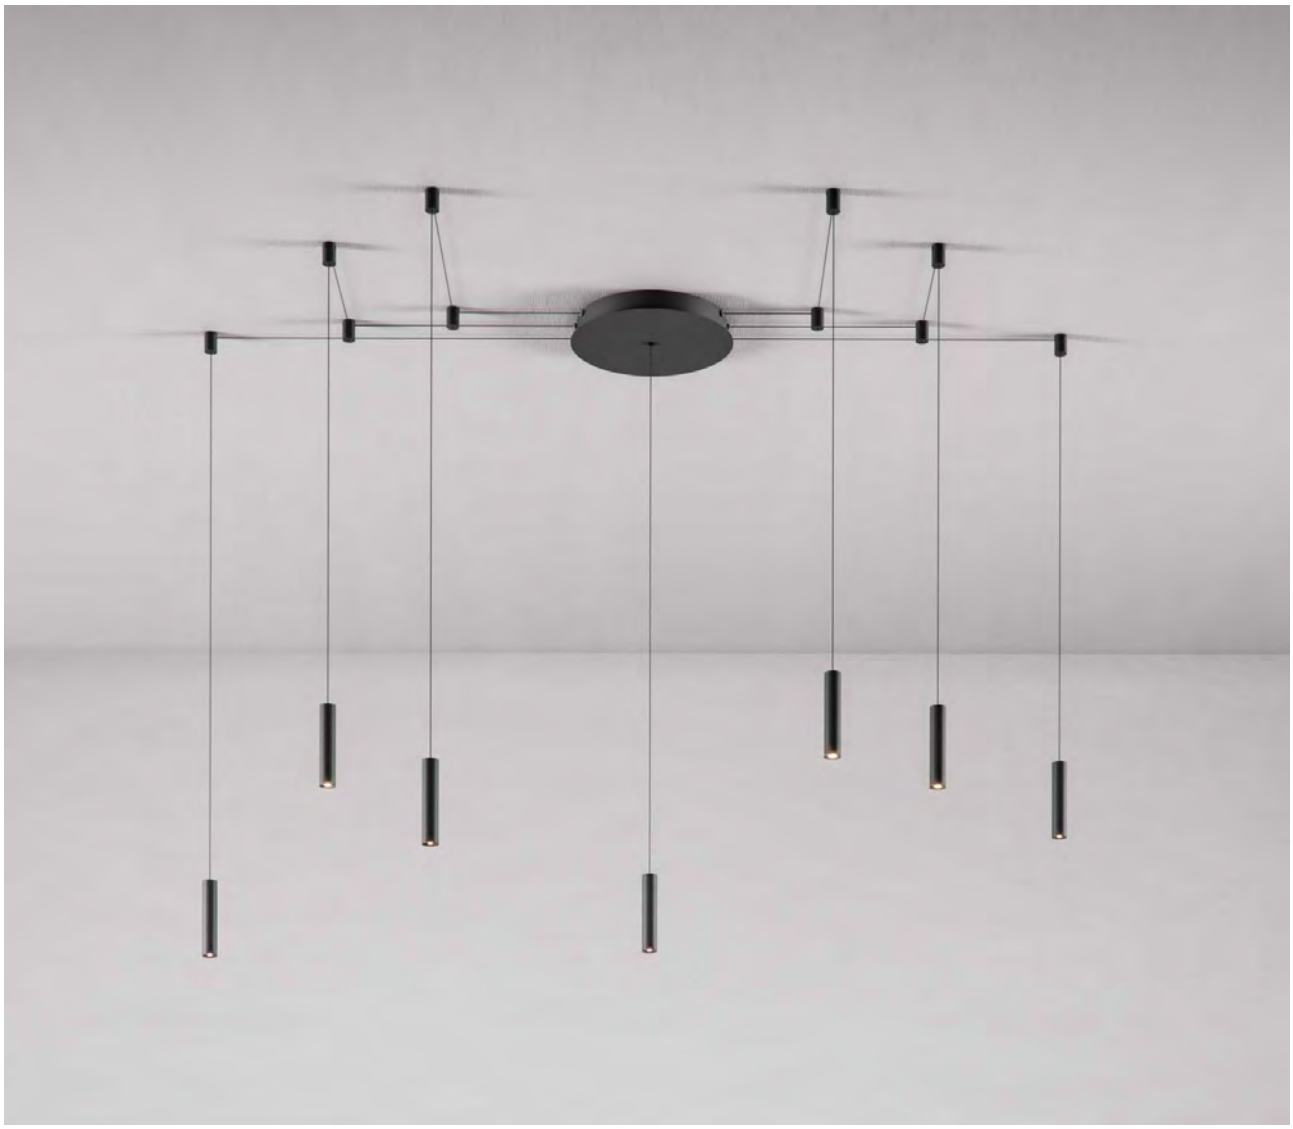

# Front base

## Base Ø250x41mm



| Code | |
|---|---|
| Code | F1 |

| Product | |
|---|---|
| Bora | 1 |
| Zoe | 3 |
| Lievo | 5 |
| Alp | 7 |
| Nano Alp | 8 |

| Units | |
|---|---|
| 2 units | 2 |
| 3 units | 3 |
| 4 units | 4 |
| 5 units | 5 |
| 6 units | 6 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Triac | 3 |
| Casambi | 5 |

| Color | |
|---|---|
| ☐ White | 1 |
| ■ Black | 2 |
| ⓘ Custom RAL | |

Code: **F1**

## Base Ø280x41mm



| Code | |
|---|---|
| Code | F2 |

| Product | |
|---|---|
| Bora | 1 |
| Zoe | 3 |
| Lievo | 5 |
| Alp | 7 |
| Nano Alp | 8 |

| Units | |
|---|---|
| 2 units | 2 |
| 3 units | 3 |
| 4 units | 4 |
| 5 units | 5 |
| 6 units | 6 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Triac | 3 |
| Casambi | 5 |

| Color | |
|---|---|
| ☐ White | 1 |
| ■ Black | 2 |
| ⓘ Custom RAL | |

Code: **F2**

## Base Ø330x41mm



| Code | |
|---|---|
| Code | F3 |

| Product | |
|---|---|
| Bora | 1 |
| Zoe | 3 |
| Lievo | 5 |
| Alp | 7 |
| Nano Alp | 8 |

| Units | |
|---|---|
| 2 units | 2 |
| 3 units | 3 |
| 4 units | 4 |
| 5 units | 5 |
| 6 units | 6 |
| 7 units | 7 |
| 8 units | 8 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Triac | 3 |
| Casambi | 5 |

| Color | |
|---|---|
| ☐ White | 1 |
| ■ Black | 2 |
| ⓘ Custom RAL | |

Code: **F3**

## Base Ø330x41mm



| Code | |
|---|---|
| Code | F3 |

| Product | |
|---|---|
| Bora XL | 2 |
| Zoe XL | 4 |
| Lievo XL | 6 |

| Units | |
|---|---|
| 2 units | 2 |
| 3 units | 3 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Triac | 3 |
| Casambi | 5 |

| Color | |
|---|---|
| ☐ White | 1 |
| ■ Black | 2 |
| ⓘ Custom RAL | |

Code: **F3**

ⓘ Consult delivery terms and conditions.

## Accessories



Wire holder
☐ 5106
■ 5107



Aditional wire (1m). Max. length 6m
☐ 5128
■ 5129

CE RoHS

*Create your code acording to your preferences. For other finishing please consult.

3 YEARS WARRANTY | IP 20 | 220/240 VAC | PF >0,9 | 50/60 Hz | TRIAC DIMM | DALI 2 | 1







Private Residence, Rubí (Spain). Design: Prêt-à-porter casas.

## Bora suspension






*Base not included. You need to choose a base to complete the instalation.

## Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 570 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ☐ 5084 |
| | ■ 5085 |
| | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Surface Base 8W
Ø75x33mm
☐ 5118
■ 5119



Recessed Base 8W
Ø90x22mm / Ø80mm
☐ 5120
■ 5121



Wire holder
☐ 5106
■ 5107



Aditional wire (1m)
☐ 5128
■ 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm


CE RoHS

*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20

## Bora XL suspension






*Base not included. You need to choose a base to complete the instalation.

## Technical Information

| | |
|---|---|
| Power | 15W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.100 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5086 |
| | ■ 5087 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Surface Base 15W
Ø75x33mm
☐ 5122
■ 5123



Recessed Base 15W
Ø90x22mm / Ø80mm
☐ 5124
■ 5125



Wire holder
☐ 5106
■ 5107



Aditional wire (1m)
☐ 5128
■ 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EAC

*See pages 416 and 418 for available codes of Side base and Front base.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20


Electrolytic Plating BRB1
On demand



## Zoe suspension






*Base not included. You need to choose a base to complete the instalation.

## Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 570 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5092 |
| | ■ 5093 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Surface Base 8W
Ø75x33mm
☐ 5118
■ 5119



Recessed Base 8W
Ø90x22mm / Ø80mm
☐ 5120
■ 5121



Wire holder
☐ 5106
■ 5107



Aditional wire (1m)
☐ 5128
■ 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm


CE RoHS EAC

*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 38° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20

## Zoe XL suspension






*Base not included. You need to choose a base to complete the instalation.

## Technical Information

| | |
|---|---|
| Power | 15W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.100 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5094 |
| | ■ 5095 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Surface Base 15W
Ø75x33mm
☐ 5122
■ 5123



Recessed Base 15W
Ø90x22mm / Ø80mm
☐ 5124
■ 5125



Wire holder
☐ 5106
■ 5107



Aditional wire (1m)
☐ 5128
■ 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EAC

*See pages 416 and 418 for available codes of Side base and Front base.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20





## Nano alp suspension






*Base not included. You need to choose a base to complete the instalation.

## Technical Information

| | |
|---|---|
| Power | 5W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 370 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ☐ 5096 |
| | ■ 5097 |
| | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Surface Base 5W
Ø75x33mm
☐ 5114
■ 5115



Recessed Base 5W
Ø90x22mm / Ø80mm
☐ 5116
■ 5117



Wire holder
☐ 5106
■ 5107



Aditional wire (1m)
☐ 5128
■ 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm


CE RoHS EAC

*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 45° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20

## Alp suspension






*Base not included. You need to choose a base to complete the instalation.

## Technical Information

| | |
|---|---|
| Power | 5W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 370 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ☐ 5098 |
| | ■ 5099 |
| | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Surface Base 5W
Ø75x33mm
☐ 5114
■ 5115



Recessed Base 5W
Ø90x22mm / Ø80mm
☐ 5116
■ 5117



Wire holder
☐ 5106
■ 5107



Aditional wire (1m)
☐ 5128
■ 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EAC

*See pages 416 and 418 for available codes of Side base and Front base.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 45° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20





## Lievo suspension






*Base not included. You need to choose a base to complete the instalation.

## Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 570 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5088 |
| | ■ 5089 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Surface Base 8W
Ø75x33mm
☐ 5118
■ 5119



Recessed Base 8W
Ø90x22mm / Ø80mm
☐ 5120
■ 5121



Wire holder
☐ 5106
■ 5107



Aditional wire (1m)
☐ 5128
■ 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm


CE RoHS EAC

*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20

## Lievo XL suspension






*Base not included. You need to choose a base to complete the instalation.

## Technical Information

| | |
|---|---|
| Power | 15W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.100 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ☐ 5090 |
| | ■ 5091 |
| | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Surface Base 15W
Ø75x33mm
☐ 5122
■ 5123



Recessed Base 15W
Ø90x22mm / Ø80mm
☐ 5124
■ 5125



Wire holder
☐ 5106
■ 5107



Aditional wire (1m)
☐ 5128
■ 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EAC

*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20






New

## Cookie suspension



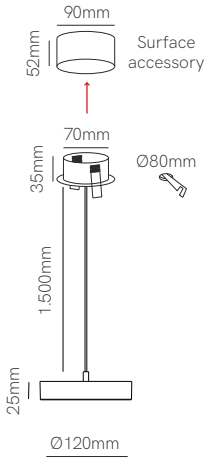


*Includes surface and recessed base.

## Technical Information

| | |
|---|---|
| Power | 12W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 985 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ☐ 5183 |
| | ■ 5184 |
| | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 38° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/20




## Bora suspension surface






## Bora suspension recessed






## Technical Information

| | Bora suspension surface | Bora suspension recessed |
|---|---|---|
| Power | 8,5W | 8,5W |
| Installation | Surface | Recessed |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 530 lm / 540 lm | 530 lm / 540 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome / Rose gold | White / Black / Chrome / Rose gold |


| Code | | | | | |
|---|---|---|---|---|---|
| | ☐ | 2.700K | 4605 | ☐ 2.700K | 4613 |
| | ☐ | 3.000K | 4606 | ☐ 3.000K | 4614 |
| | ■ | 2.700K | 4607 | ■ 2.700K | 4615 |
| | ■ | 3.000K | 4608 | ■ 3.000K | 4616 |
| | ■ | 2.700K | 4609 | ■ 2.700K | 4617 |
| | ■ | 3.000K | 4610 | ■ 3.000K | 4618 |
| | ■ | 2.700K | 4611 | ■ 2.700K | 4619 |
| | ■ | 3.000K | 4612 | | |

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <15 | PF >0,6 | CRI ≥93 | 36° | 50/60 Hz | +40°C -20°C | 1/18


## Bora recessed 4,5W






## Bora recessed 8,5W






## Technical Information

| | Bora recessed 4,5W | Bora recessed 8,5W |
|---|---|---|
| Version | Bora recessed 4,5W | Bora recessed 8,5W |
| Power | 4,5W | 8,5W |
| Installation | Recessed | Recessed |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 290 lm / 300 lm | 530 lm / 540 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome / Rose gold | White / Black / Chrome / Rose gold |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 4589 | ☐ | 2.700K | 4597 |
| | ☐ | 3.000K | 4590 | ☐ | 3.000K | 4598 |
| | ■ | 2.700K | 4591 | ■ | 2.700K | 4599 |
| | ■ | 3.000K | 4592 | ■ | 3.000K | 4600 |
| | ■ | 2.700K | 4593 | ■ | 2.700K | 4601 |
| | ■ | 3.000K | 4594 | ■ | 3.000K | 4602 |
| | ■ | 2.700K | 4595 | ■ | 2.700K | 4603 |
| | ■ | 3.000K | 4596 | ■ | 3.000K | 4604 |
| | UGR <10 \| PF >0,5 \| 38° | | | UGR <15 \| PF >0,6 \| 36° | | |


CE RoHS EMC

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C -20°C | 1/18




## Bora surface 4,5W






## Bora surface 8,5W






## Technical Information

| | Bora surface 4,5W | Bora surface 8,5W |
|---|---|---|
| Version | Bora surface 4,5W | Bora surface 8,5W |
| Power | 4,5W | 8,5W |
| Installation | Surface | Surface |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 290 lm / 300 lm | 530 lm / 540 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome / Rose gold | White / Black / Chrome / Rose gold |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 4621 | ☐ | 2.700K | 4629 |
| | ☐ | 3.000K | 4622 | ☐ | 3.000K | 4630 |
| | ■ | 2.700K | 4623 | ■ | 2.700K | 4631 |
| | ■ | 3.000K | 4624 | ■ | 3.000K | 4632 |
| | ■ | 2.700K | 4625 | ■ | 2.700K | 4633 |
| | ■ | 3.000K | 4626 | ■ | 3.000K | 4634 |
| | ■ | 2.700K | 4627 | ■ | 2.700K | 4635 |
| | ■ | 3.000K | 4628 | ■ | 3.000K | 4636 |
| | UGR <10 \| PF >0,5 \| 38° | | | UGR <15 \| PF >0,6 \| 36° | | |

CE RoHS EMC


3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C -20°C | 1/18



New

## Alp surface






### Technical Information

| | |
|---|---|
| Power | 4,5W |
| Installation | Surface |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 220 lm |
| Material | Aluminium |
| Finishes | White / Black |


| Code | | | |
|---|---|---|---|
| | ☐ | 2.700K | 5357 |
| | ☐ | 3.000K | 5358 |
| | ■ | 2.700K | 5360 |
| | ■ | 3.000K | 5361 |

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 36° | 50/60 Hz | +40°C -20°C | 1/18


## Zoe surface






## Zoe recessed






## Technical Information

| | | |
|---|---|---|
| Power | 7W | 7W |
| Installation | Surface | Recessed |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 360 lm / 370 lm | 360 lm / 370 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 4803 | ☐ | 2.700K | 4799 |
| | ☐ | 3.000K | 4804 | ☐ | 3.000K | 4800 |
| | ■ | 2.700K | 4805 | ■ | 2.700K | 4801 |
| | ■ | 3.000K | 4806 | ■ | 3.000K | 4802 |


CE RoHS EAC

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 38° | 50/60 Hz | +40°C -20°C | 1/36




## Atmos slim 25






## Atmos slim 45



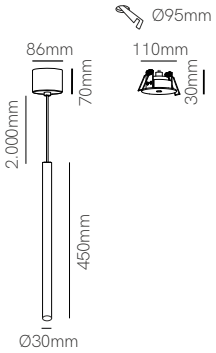


*Need Tuya Smart App to work.

## Technical Information

| | Atmos slim 25 | Atmos slim 45 |
|---|---|---|
| Power | 6W | 6W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Tuya 2.700K - 4.000K | Tuya 2.700K - 4.000K |
| Lumens | 460 lm | 460 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome | White / Black / Chrome |

| Code | | |
|---|---|---|
| | ☐ 4930 | ☐ 4750 |
| | ■ 4931 | ■ 4751 |
| | ☐ 4932 | ☐ 4752 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Gateway Wifi
4956 ☐


CE RoHS

*See page 8 for Gateway additional info.
*All versions included surface base (mounted) and recessed base (not mounted).

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 45° | 50/60 Hz | +50°C -10°C | IK03 | tuya | 1/10


## Atmos 25






## Atmos 45



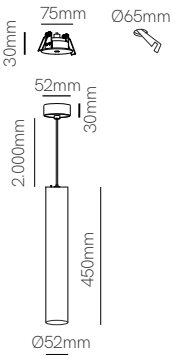


## Technical Information

| | Atmos 25 | Atmos 45 |
|---|---|---|
| Power | 7W | 10W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 770 lm | 1.100 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome | White / Black / Chrome |

| Code | | |
|---|---|---|
| | ☐ 4461 | ☐ 4463 |
| | ■ 4462 | ■ 4464 |
| | ▣ 4952 | ▣ 4953 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | 1/8 | 1/4 |

ⓘ Consult delivery terms and conditions.

## Accessories



Included with:
4461 / 4463



Included with:
4461 / 4462 / 4463 / 4464

CE RoHS EMC


*All versions included surface base (mounted) and recessed base (not mounted).

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH




## Atmos 25 GU10



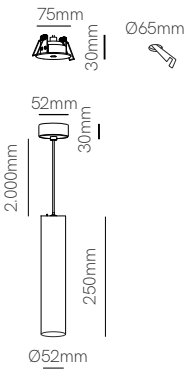


## Atmos 45 GU10



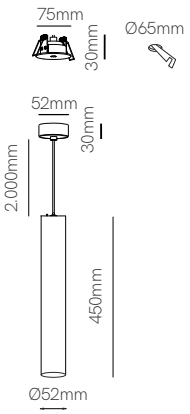


*All versions included surface base (mounted) and recessed base (not mounted).

## Technical Information

| | | |
|---|---|---|
| Installation | Surface / Recessed | Surface / Recessed |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome | White / Black / Chrome |

| Code | | |
|---|---|---|
| | ☐ 4465 | ☐ 4467 |
| | ■ 4466 | ■ 4468 |
| | ▢ 4954 | ▢ 4955 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | 1/8 | 1/4 |

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | IP 20 | 220/240 VAC


bauhaus
CHANEL
CHANEL
Vermeer
CHANEL
TOM FORD




## Ark surface






## Ark recessed






## Technical Information

| | Ark surface | Ark recessed |
|---|---|---|
| Power | 6W | 6W |
| Installation | Surface | Recessed |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 350 lm / 360 lm | 350 lm / 360 lm |
| Material | Aluminium and acrylic | Aluminium and acrylic |
| Finishes | White-transparent / Black-transparent / Black-gray | White-transparent / Black-transparent / Black-gray |

| Code | Ark surface | Ark recessed |
|---|---|---|
| | 4814 White-transp. 2.700K | 4808 White-transp. 2.700K |
| | 4815 White-transp. 3.000K | 4809 White-transp. 3.000K |
| | 4816 Black-transp. 2.700K | 4810 Black-transp. 2.700K |
| | 4817 Black-transp. 3.000K | 4811 Black-transp. 3.000K |
| | 4818 Black-gray 2.700K | 4812 Black-gray 2.700K |
| | 4819 Black-gray 3.000K | 4813 Black-gray 3.000K |


CE RoHS


3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 90° | 50/60 Hz | +40°C -20°C | 1/12



New


## Hat surface

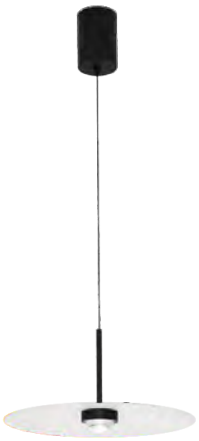

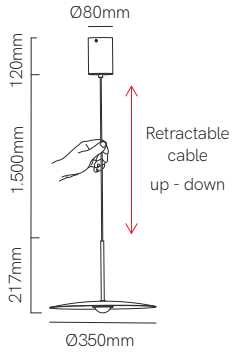


## Hat recessed



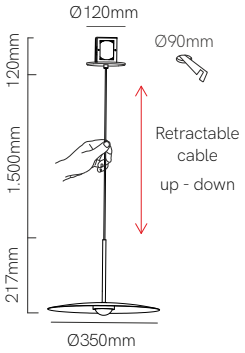


## Technical Information

| | Hat surface | Hat recessed |
|---|---|---|
| Power | 8W | 8W |
| Installation | Surface | Recessed |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 835 lm | 835 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 5345 | ☐ | 2.700K | 5351 |
| | ☐ | 3.000K | 5346 | ☐ | 3.000K | 5352 |
| | ■ | 2.700K | 5348 | ■ | 2.700K | 5354 |
| | ■ | 3.000K | 5349 | ■ | 3.000K | 5355 |

CE RoHS


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,6 | CRI ≥90 | 83° | 50/60 Hz | +40°C -20°C | 1/5



## Volt round 1







## Volt square 1






*Included surface base (mounted) and recessed base (not mounted).

## Technical Information

| | | |
|---|---|---|
| Power | 8W | 8W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 570 lm | 570 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 5041 | ☐ 5043 |
| | ■ 5042 | ■ 5044 |
| | ⓘ Custom RAL | ⓘ Custom RAL |


CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 100/277 VAC | PF >0,9 | CRI ≥90 | 38° | IK06 | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20


## Volt round 3






## Volt square 3






### Technical Information

| | Volt round 3 | Volt square 3 |
|---|---|---|
| Power | 24W | 24W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.700 lm | 1.700 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 5045 | ☐ 5047 |
| | ■ 5046 | ■ 5048 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | PF >0,9 | CRI ≥90 | 38° | IK06 | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/10


1


## Volt round 1 GU10



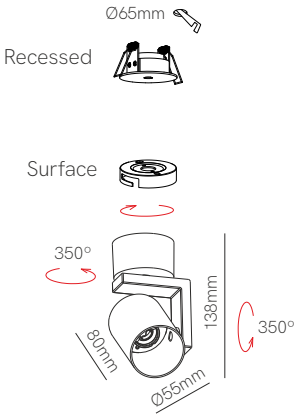


## Volt square 1 GU10



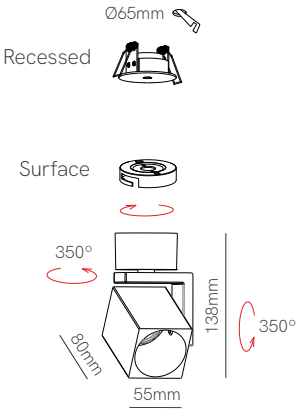


*Included surface base (mounted) and recessed base (not mounted).

## Technical Information

| | | |
|---|---|---|
| Installation | Surface / Recessed | Surface / Recessed |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 5049 | ☐ 5051 |
| | ■ 5050 | ■ 5052 |
| | ⓘ Custom RAL | ⓘ Custom RAL |


CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | IK06 | 1/20


## Volt round 3 GU10






## Volt square 3 GU10






## Technical Information

| | | |
|---|---|---|
| Installation | Surface | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 5053 | ☐ 5055 |
| | ■ 5054 | ■ 5056 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | IK06 | 1/10




## Tot 40W



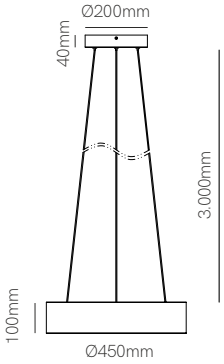


## Tot 60W



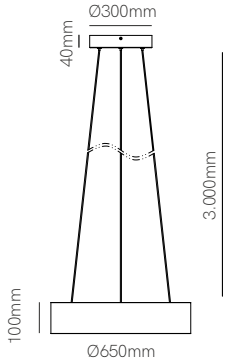


*Need Tuya Smart App to work.

## Technical Information

| | 40W | 60W |
|---|---|---|
| Power | 40W | 60W |
| Installation | Surface / Pendant | Surface / Pendant |
| Color Temperature | Tuya 2.600K - 4.000K | Tuya 2.600K - 4.000K |
| Lumens | 3.400 lm | 5.900 lm |
| Material | Aluminium and polycarbonate | Aluminium and polycarbonate |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 4902 | ☐ 4904 |
| | ■ 4903 | ■ 4905 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | ⓘ Electrolytic Plating | ⓘ Electrolytic Plating |

ⓘ Consult delivery terms and conditions.

## Accessories



Gateway Wifi
4956 ☐


CE RoHS

*See page 8 for Gateway additional info.
*Included recessed base (not mounted) and surface base (mounted).


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | +50°C -20°C | tuya | 1




## Rubyc dimmable









## Rubyc








## Technical Information

| | Rubyc dimmable | Rubyc |
|---|---|---|
| Power | 14W | 14W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.205 lm | 1.205 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |




| Code | | |
|---|---|---|
| | ☐ 5069 | ☐ 4230-N |
| | ■ 5070 | ■ 4231-N |
| | ⓘ Custom RAL | ⓘ Custom RAL |

TRIAC DIMM

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥97 | 40° | 50/60 Hz | +40°C -10°C | CCT SWITCH | AKZO NOBEL | 1/4/12

| Mini rubyc dimmable | Mini rubyc |
|---|---|
|  |  |
|  |  |
|  |  |



## Technical Information

| | | |
|---|---|---|
| Power | 7W | 7W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 850 lm | 850 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | Black |
| Code | ☐ 4332-N | ■ 4333 |
| | ■ 4333-N | Custom RAL |
| | ⓘ Custom RAL ⓘ | |


TRIAC DIMM

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40° | 50/60 Hz | +40°C -20°C | CCT SWITCH | AKZO NOBEL | 1/30




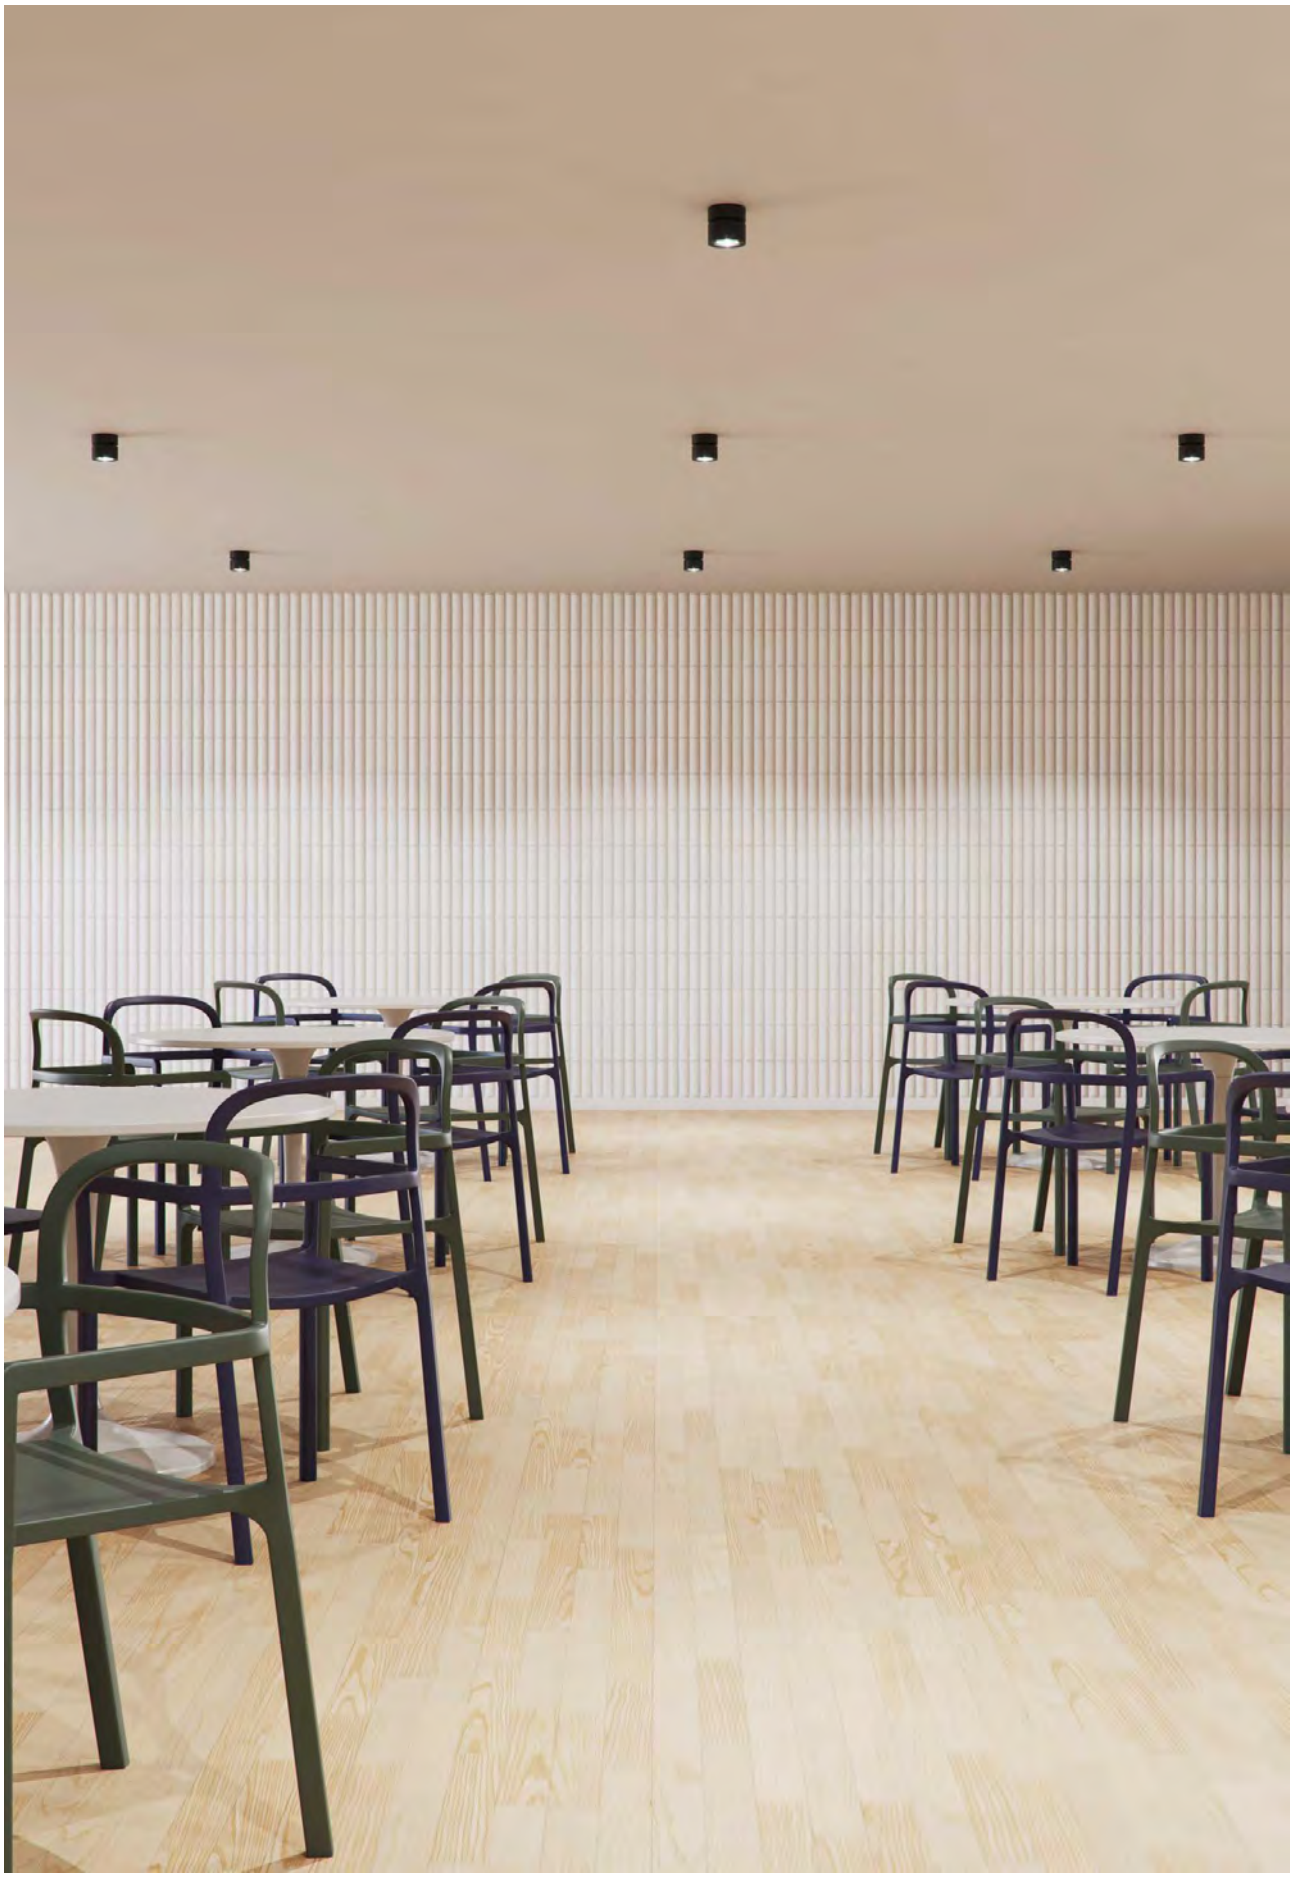

## Concord dimmable








## Technical Information

| | |
|---|---|
| Power | 14W |
| Installation | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.205 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | 5071 |
| | 5072 |
| ⓘ | Custom RAL |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥97 | 40° | 50/60 Hz | +40°C -10°C | TRIAC DIMM | CCT SWITCH | AKZO NOBEL | 1/4/12

## Mini concord dimmable








## Technical Information

| | |
|---|---|
| Power | 7W |
| Installation | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 850 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | 4334-N |
| | 4335-N |
| ⓘ | Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40° | 50/60 Hz | +40°C -20°C | TRIAC DIMM | CCT SWITCH | AKZO NOBEL | 1/30






## Plus








## Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.040 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ☐ 4522 |
| | ■ 4523 |
| | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 15° 35° 60° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20



New


## Argo






## Argo large






## Argo flat






### Technical Information




| | Argo | Argo large | Argo flat |
|---|---|---|---|
| Power | 3,5W | 3,5W | 2W |
| Installation | Recessed | Recessed | Recessed |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 125 lm | 125 lm | 80 lm |
| Material | Aluminium and acrylic | Aluminium and acrylic | Aluminium and acrylic |
| Finishes | White / Black | White / Black | White / Black |

| Code | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 5246 | ☐ | 2.700K | 5252 | ☐ | 2.700K | 5258 |
| | ☐ | 3.000K | 5247 | ☐ | 3.000K | 5253 | ☐ | 3.000K | 5259 |
| | ☐ | 4.000K | 5248 | ☐ | 4.000K | 5254 | ☐ | 4.000K | 5260 |
| | ■ | 2.700K | 5249 | ■ | 2.700K | 5255 | ■ | 2.700K | 5261 |
| | ■ | 3.000K | 5250 | ■ | 3.000K | 5256 | ■ | 3.000K | 5262 |
| | ■ | 4.000K | 5251 | ■ | 4.000K | 5257 | ■ | 4.000K | 5263 |

CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥90 | 180° | 50/60 Hz | +40°C -20°C | 1/100



| | Mac wall 120mm | Mac wall 180mm | Mac wall 250mm |
|---|---|---|---|
| |  |  |  |
| |   |   |   |

*Included 33mm base, optional 53mm base.

## Technical Information

| | | | |
|---|---|---|---|
| Power | 6W | 15W | 20W |
| Installation | Surface | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 600 lm | 1.500 lm | 2.000 lm |
| Material | Aluminium + pc / Pc (wood) | Aluminium + pc / Pc (wood) | Aluminium + pc / Pc (wood) |
| Finishes | White / Black / Wood / Corten | White / Black / Wood / Corten | White / Black / Wood / Corten |

| Code | | | |
|---|---|---|---|
| | ☐ 4995 | ☐ 4998 | ☐ 5001 |
| | ■ 4996 | ■ 4999 | ■ 5002 |
| | ■ 4997 | ■ 5000 | ■ 5003 |
| | ■ 5218 New | ■ 5219 New | ■ 5220 New |
| | ⓘ Custom RAL | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories New

53mm

Large base for 120mm

☐ 5226 ■ 5227 ■ 5228 ■ 5229

53mm

Large base for 180mm

☐ 5230 ■ 5231 ■ 5232 ■ 5233

53mm

Large base for 250mm

☐ 5234 ■ 5235 ■ 5236 ■ 5237

53mm


CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | IK06 | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/10




## One wall






## One wall dual






*GU10 Bulbholder included.

## Technical Information

| | One wall | One wall dual |
|---|---|---|
| Installation | Surface | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |
| Bulbholder | 50mm GU10 | 50mm GU10 |

| Code | | |
|---|---|---|
| | ☐ 5006 | ☐ 5009 |
| | ■ 5007 | ■ 5010 |
| | ■ 5008 | ■ 5011 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/20




## Zio wall






## Zio wall dual






*GU10 Bulbholder included.

## Technical Information

| | | |
|---|---|---|
| Installation | Surface | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |
| Bulbholder | 50mm GU10 | 50mm GU10 |

| Code | | |
|---|---|---|
| | 5012 | 5015 |
| | 5013 | 5016 |
| | 5014 | 5017 |
| ⓘ | Custom RAL | ⓘ Custom RAL |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/20




## Icon 7W






## Icon 12W






## Technical Information

| | Icon 7W | Icon 12W |
|---|---|---|
| Power | 7W | 12W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 770 lm | 1.320 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | |
|---|---|---|
| | ☐ 4383 | ☐ 4386 |
| | ■ 4384 | ■ 4387 |
| | ■ 4385 | ■ 4388 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,5 | CRI ≥90 | 120° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/12



New

## Tron






## Technical Information

| | |
|---|---|
| Power | 8W / 16W / 24W |
| Lumens | 720 lm - 2.400 lm |
| Installation | Wall |
| Material | Aluminium |

| Code | | Diffuser | | Size (X) | | CCT (Lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 9 | Opal | 7 | 290mm | 1 | 2.700K (60 lm/W) - 29W/m | 2 | Triac | 4 | White (9003) | 1 |
| | | | | 590mm | 2 | 3.000K (65 lm/W) - 29W/m | 3 | | | Black (9005) | 2 |
| | | | | 870mm | 3 | 4.000K (70 lm/W) - 29W/m | 4 | | | ⓘ Custom RAL | C |

Code: 9 7 4

CE RoHS EMC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.


5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 0,87m Max | TRIAC DIMM



New


## Sphere wall






## Sphere Alp wall






### Technical Information

| | Sphere wall | Sphere Alp wall |
|---|---|---|
| Power | 9W | 20W |
| Installation | Magnet Surface | Surface |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 465 lm | 680 lm |
| Material | Aluminium and glass | Aluminium and glass |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 5333 | ☐ | 2.700K | 5339 |
| | ☐ | 3.000K | 5334 | ☐ | 3.000K | 5340 |
| | ■ | 2.700K | 5336 | ■ | 2.700K | 5342 |
| | ■ | 3.000K | 5337 | ■ | 3.000K | 5343 |

IP 54 | PF >0,6 | 360°

IP 20 | PF >0,9 | 360° | 36°

CE RoHS


3 YEARS WARRANTY | 30.000 HOURS | 220/240 VAC | UGR <19 | CRI ≥90 | 50/60 Hz | +40°C -20°C | 1/6



New


## Sweet usb-c






## Sweet usb-a






## Technical Information

| | Sweet usb-c | Sweet usb-a |
|---|---|---|
| Power | 4W | 4W |
| Installation | Surface | Surface |
| Color Temperature | 2.700K | 2.700K |
| Lumens | 150 lm / 90 lm / 40 lm | 150 lm / 90 lm / 40 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | Black |
| Code | ☐ 5155<br>■ 5156 | ■ 4175 |
| | USB-C 5V 2A \| CRI ≥90 | USB-A 5V 2A \| CRI ≥80 |

CE RoHS EMC

*Charger by induction and USB.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,4 | 20° | 5W | 50/60 Hz | 3 INTENSITIES | +40°C -20°C | 1/10




New

## Beam






## Technical Information

| | |
|---|---|
| Power | 5W |
| Installation | Surface |
| Color Temperature | 2.700K |
| Lumens | 380 lm / 190 lm / 95 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5157 |
| | ■ 5158 |

CE RoHS

*Charger by USB-C.


5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥90 | 40° | 50/60 Hz | USB-C 5V 2A | 3 INTENSITIES | +40°C -20°C | 1/12



New

## Pure






## Technical Information

| | |
|---|---|
| Power | 4W |
| Installation | Surface |
| Color Temperature | 2.700K |
| Lumens | 155 lm / 80 lm / 40 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5159 |
| | ■ 5160 |

CE RoHS

*Charger by USB.


3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | USB-C 5V 2A | CRI ≥90 | 30° | 50/60 Hz | 3 INTENSITIES | +40°C -20°C | 1/20



New

## Oma







## Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Surface |
| Color Temperature | 3.000K |
| Lumens | 144 lm |
| Material | Aluminium and glass |
| Finishes | White / Amber / Turquoise |

| Code | |
|---|---|
| | 5381 |
| | 5382 |
| | 5383 |


CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥90 | 50/60 Hz | TRIAC DIMM | +40°C -20°C | 1/8

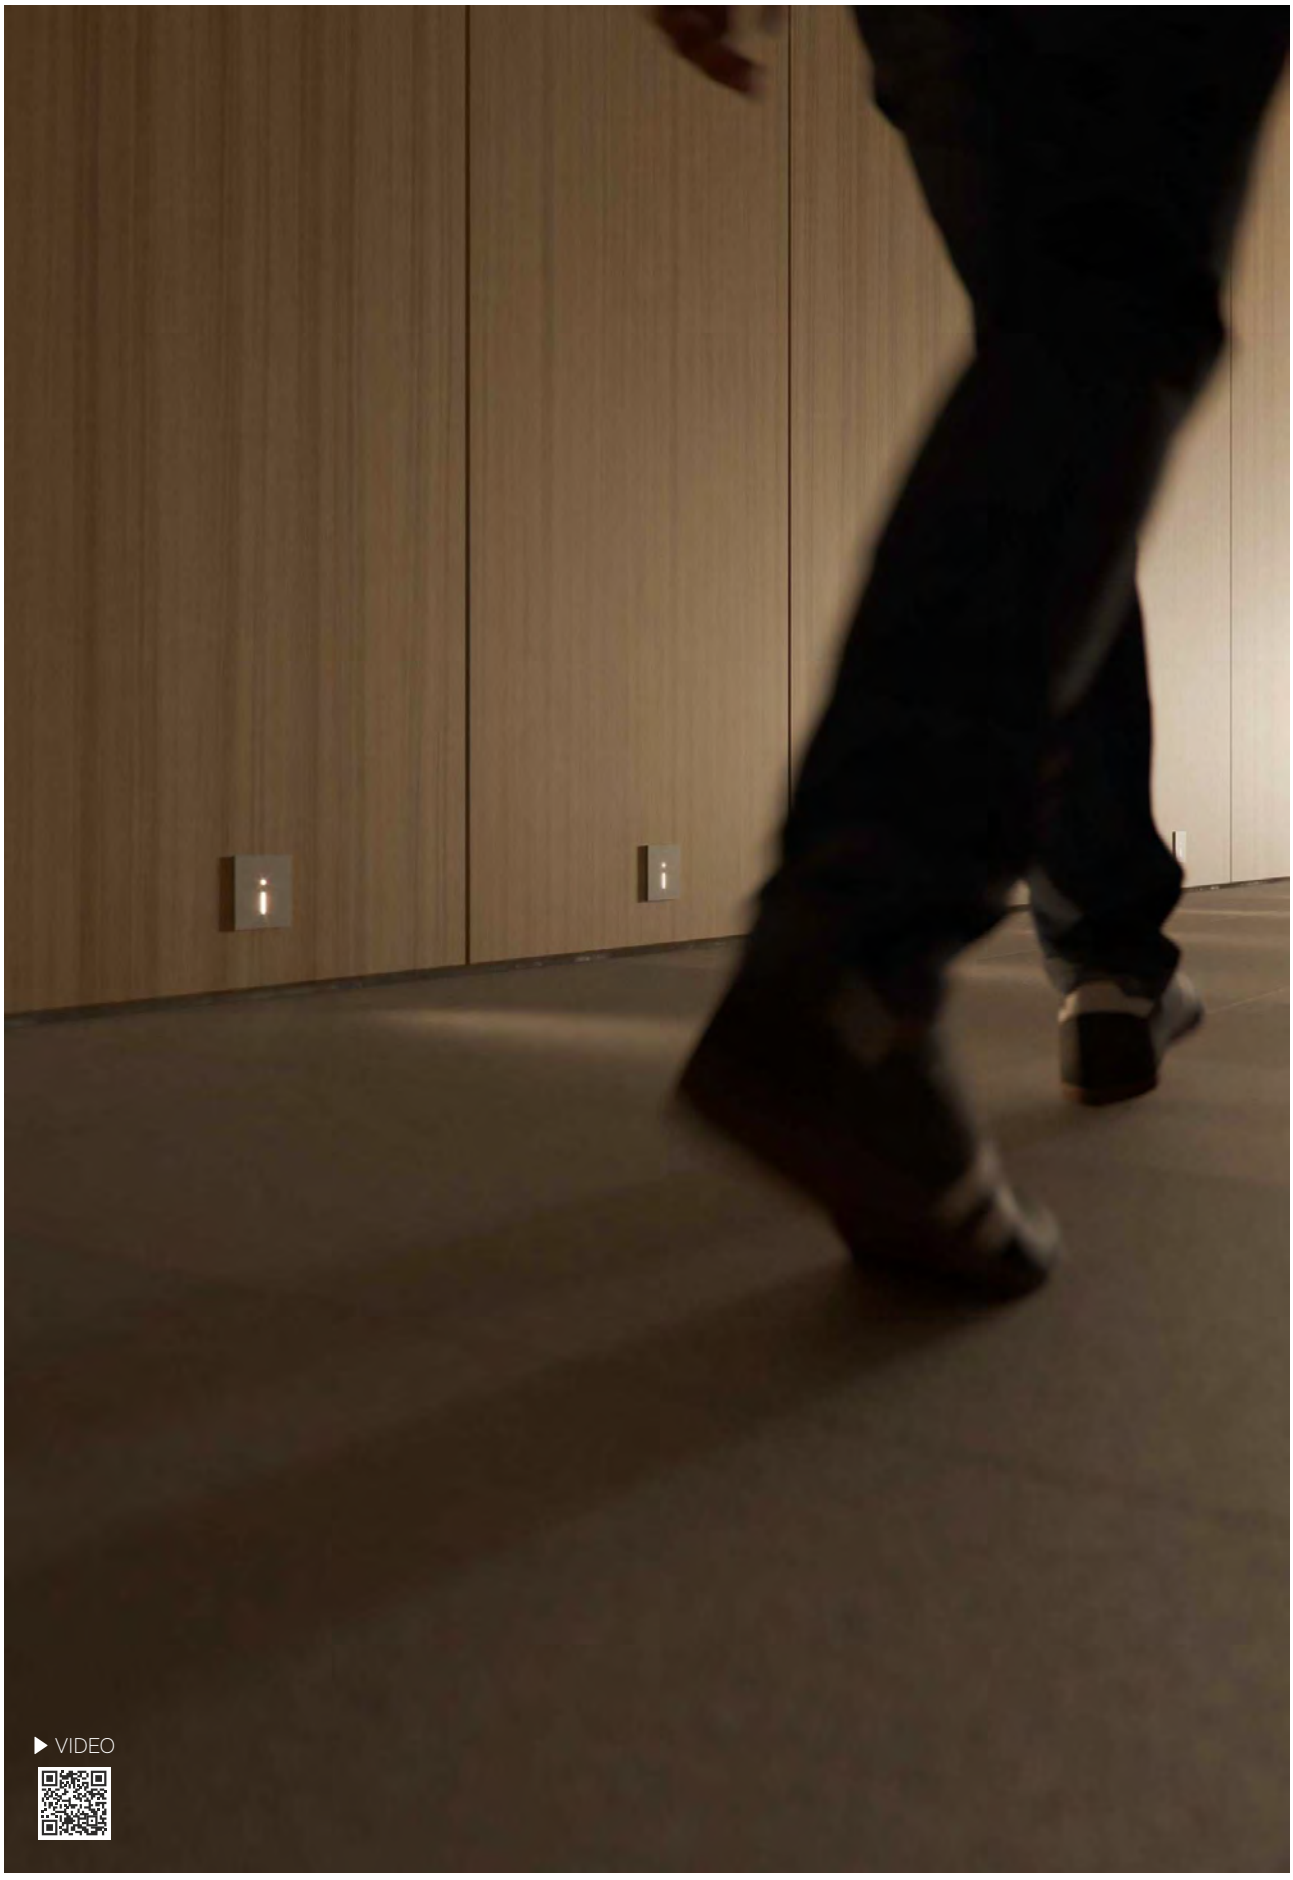
▶ VIDEO

## Lao











Recessed box included
66mm x Ø73mm



White and black cover included

*Recessed box, white and black cover included.

## Technical Information


| | |
|---|---|
| Power | 1,5W |
| Installation | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 20 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ☐ ■ 5027 |
| ⓘ | Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 175/265 VAC | PF >0,4 | CRI ≥80 | 38° | 50/60 Hz | +45°C -20°C | 6 - 8m | ON OFF | OFF 30 sec | CCT SWITCH | 1/50

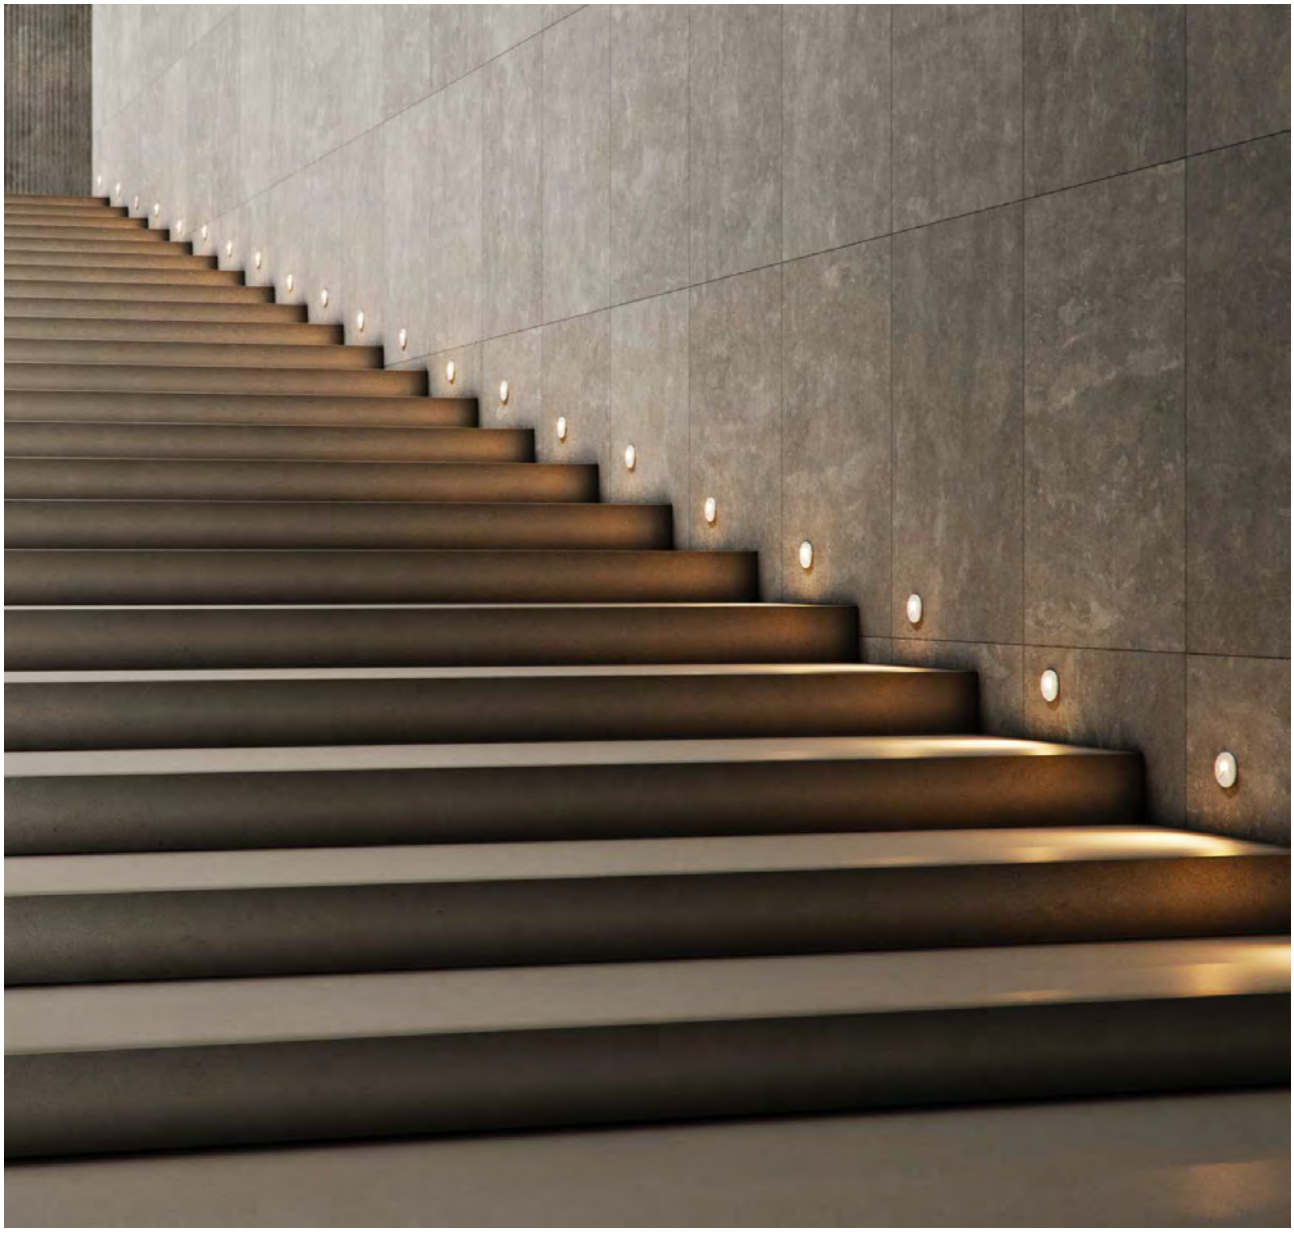



## Pun











Recessed box included
66mm x Ø73mm



White and black cover included

*Recessed box, white and black cover included.

## Technical Information

| | |
|---|---|
| Power | 3W |
| Installation | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 65 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ☐ ■ 5029 |
| | ⓘ Custom RAL |

CE RoHS


ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 175/265 VAC | PF >0,4 | CRI ≥80 | 38° | 50/60 Hz | IK07 | +45°C -20°C | CCT SWITCH | 1/50



## Ilo








## Skin






*Recessed box included.

## Technical Information






| | Ilo | Skin |
|---|---|---|
| Power | 2W | 2W |
| Installation | Recessed | Recessed |
| Color Temperature | 3.000K | 3.000K |
| Lumens | 60 lm | 60 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 4126 | ☐ 4108 |
| | ■ 4127 | ■ 4109 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥80 | 120° | 50/60 Hz | IK07 | +50°C -20°C | 1/50

| Port | Grow | Steps |
|---|---|---|
|  |  |  |
|  |  |  |
|  |  |  |

*Recessed box included.


## Technical Information

| | Port | Grow | Steps |
|---|---|---|---|
| Power | 4W | 4W | 4W |
| Installation | Recessed | Recessed | Recessed |
| Color Temperature | 3.000K | 3.000K | 3.000K |
| Lumens | 60 lm | 60 lm | 60 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |
| Code | ☐ 4112 | ☐ 4106 | ☐ 4110 |
| | ■ 4113 | ■ 4107 | ■ 4111 |
| | ⓘ Custom RAL | ⓘ Custom RAL | ⓘ Custom RAL |
| | 120° | 120° | 120° |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥80 | 50/60 Hz | IK07 | +50°C -20°C | 1/50

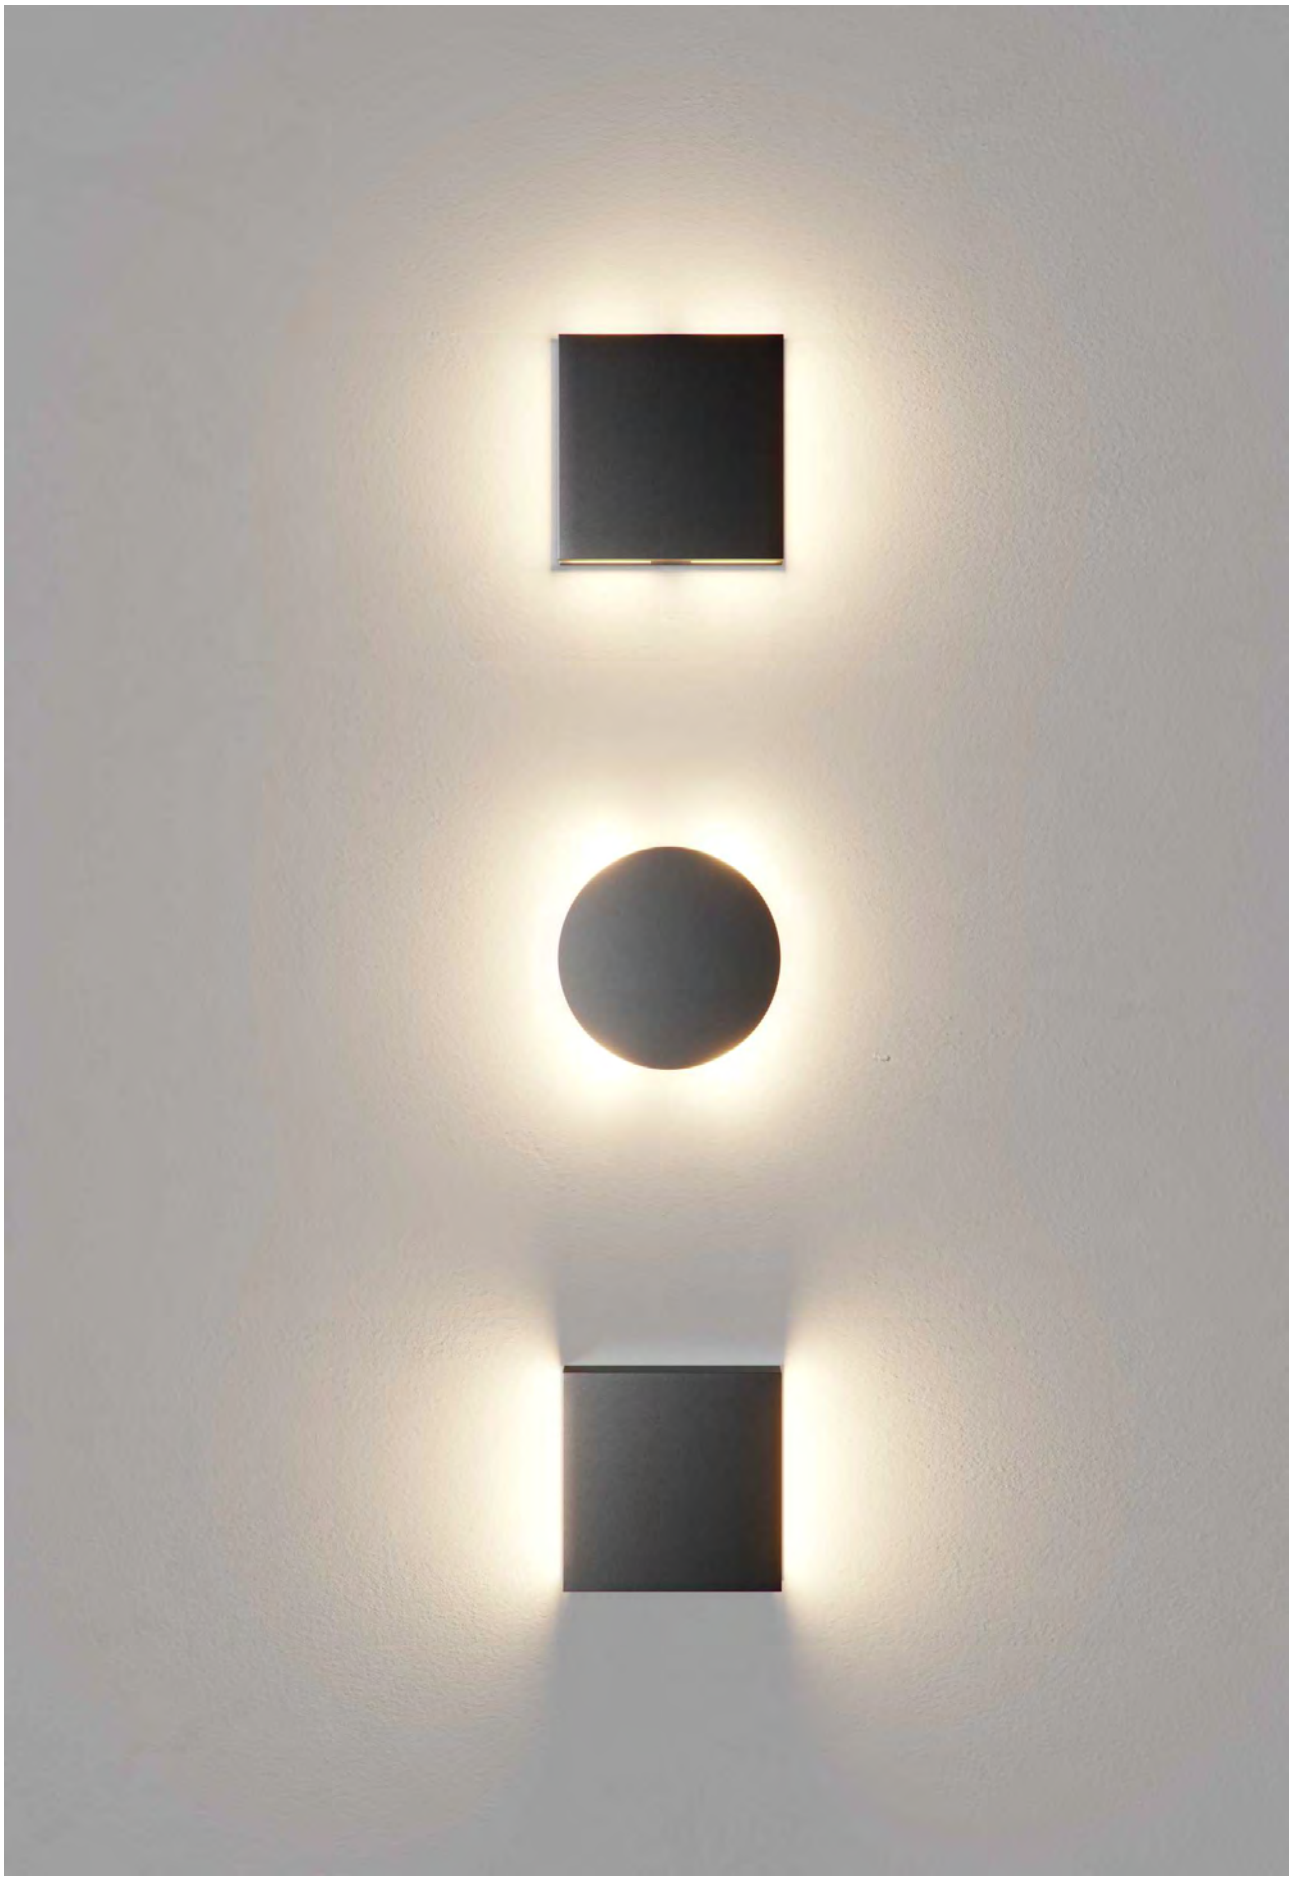



## Stem






## Technical Information

| | |
|---|---|
| Power | 5W |
| Installation | Desktop |
| Color Temperature | 2.700K |
| Lumens | 175 lm |
| Material | Aluminium and polycarbonate |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 4979 |
| | ■ 4981 |

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,45 | CRI ≥90 | 30° | 5W | 50/60 Hz | IK06 | +50°C -20°C | 1/20




▶ VIDEO

New

## Bag






## Technical Information

| | |
|---|---|
| Power | 2W |
| Installation | Portable |
| Color Temperature | 3.000K |
| Lumens | 50 lm |
| Material | Aluminium |
| Finishes | White / Black / Brushed Gold / Champagne |

| Code | |
|---|---|
| | 5329 |
| | 5330 |
| | 5331 |
| | 5332 |

CE RoHS


3 YEARS WARRANTY BATTERY 2 YEARS | 30.000 HOURS | 2,5 HOURS | 3,5 HOURS | USB-C 5V | 1.800 mAh | IP 20 | CRI ≥90 | 180° | DIMMABLE | IK06 | +40°C -20°C | 1/20


▶ VIDEO

New

## Bimba






## Technical Information

| | |
|---|---|
| Power | 2W |
| Installation | Portable |
| Color Temperature | Switch 2.000K / 3.100K / 5.000K |
| Lumens | 118 lm |
| Material | Aluminium |
| Finishes | White / Brushed Gold / Champagne |

| Code | |
|---|---|
| | 5325 |
| | 5327 |
| | 5328 |

CE RoHS

3 YEARS WARRANTY BATTERY 1 YEARS | 9.000 HOURS | 3,5 HOURS | 5 HOURS | USB-C 5V | 3.000 mAh | IP 65 | CRI ≥80 | 110° | DIMMABLE | IK04 | +40°C -20°C | CCT SWITCH | 1/8













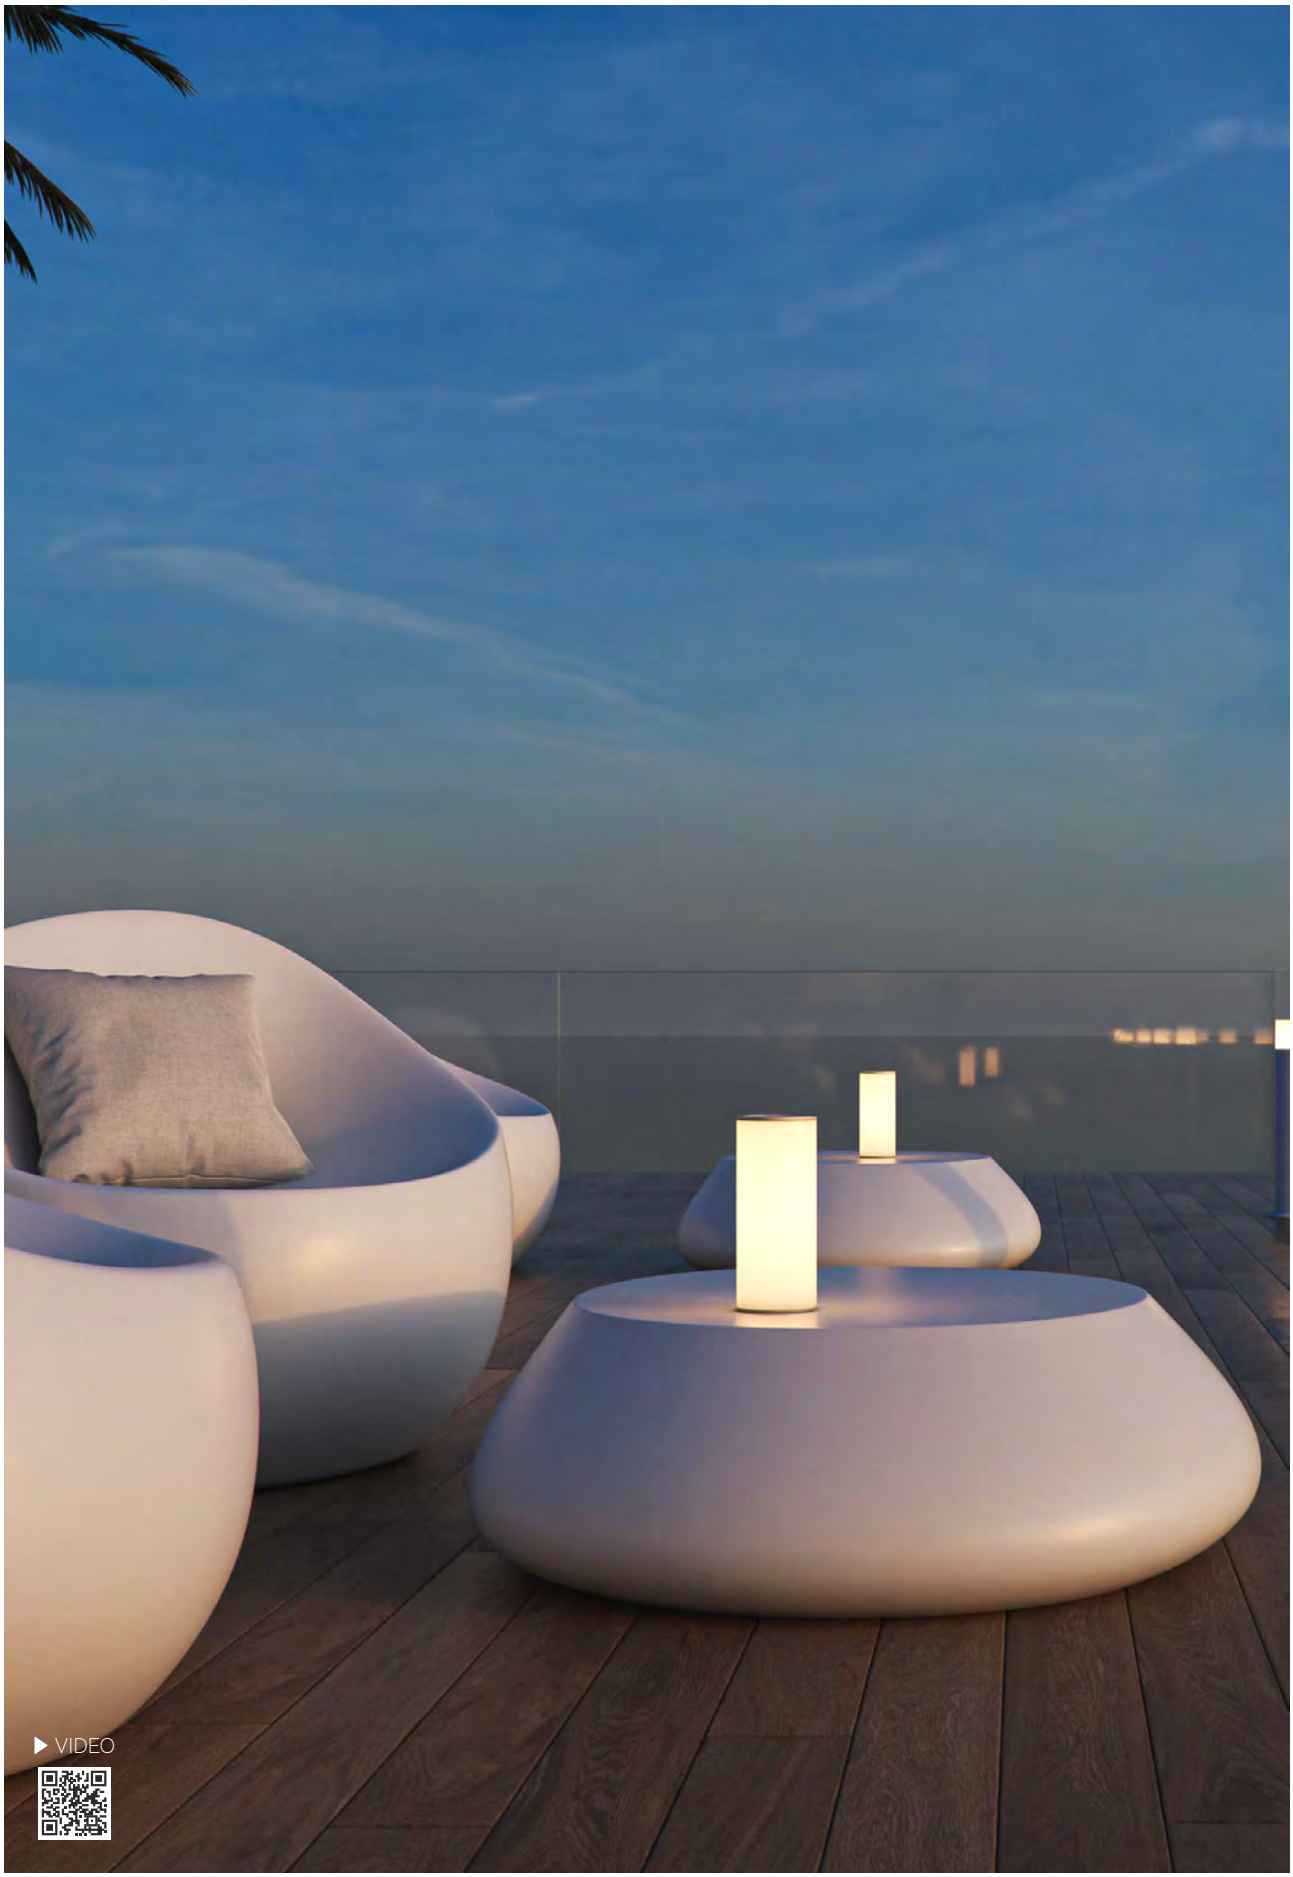


▶ VIDEO

## Converse lighting






## Technical Information

| | |
|---|---|
| Power | 2,5W |
| Installation | Portable |
| Color Temperature | 2.700K / 5.000K |
| Lumens | 225 lm |
| Finishes | White |

| | |
|---|---|
| Code | ☐ 3916-N |

CE RoHS


3 YEARS WARRANTY BATTERY 2 YEARS | 50.000 HOURS | 5-6 HOURS | 4-150 HOURS | MICRO USB 5V | 2.200 mAh | IP 20 | CRI ≥82 | 360° | DIMMABLE | +40°C -20°C | 1/15

# Downlights




## Kora round 20W






## Kora round 25W






### Technical Information


| | | |
|---|---|---|
| Power | 20W | 25W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.400 lm | 3.000 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White | White |
| Code | ☐ 4832 | ☐ 4500-V2 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +45°C -25°C | CCT SWITCH | 1/5


## Kora square 20W






## Kora square 25W






### Technical Information

| | | |
|---|---|---|
| Power | 20W | 25W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.400 lm | 3.000 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White | White |
| Code | ☐ 4831 | ☐ 4499-V2 |


CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +45°C -25°C | CCT SWITCH | 1/5



iting
om
123



| Thessis 15W | Thessis 25W | Thessis 35W |
|---|---|---|
|  |  |  |




## Technical Information

| | Thessis 15W | Thessis 25W | Thessis 35W |
|---|---|---|---|
| Power | 15W | 25W | 35W |
| Installation | Recessed | Recessed | Recessed |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 1.300 lm | 2.625 lm | 3.100 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White / Black | White / Black | White |
| Code | ☐ 4766 | ☐ 4236 | ☐ 5030 |
| | ■ 4987 | ■ 4988 | ⓘ Custom RAL |
| | ⓘ Custom RAL | ⓘ Custom RAL | |
| | UGR <19 | UGR <19 | |

CE RoHS EMC


ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥85 | 90° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/6

| Thessis 15W dimmable | Thessis 25W dimmable |
|---|---|








## Technical Information

| | | |
|---|---|---|
| Power | 15W | 25W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 1.300 lm | 2.625 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White | White |
| Code | ☐ 4767 | ☐ 4691 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 25.000 HOURS | → | IP 40 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥85 | 90° | 50/60 Hz | IK06 | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/6





## Air switch






## Technical Information

| | |
|---|---|
| Power | 22W |
| Installation | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.200 lm |
| Material | Polybutylene and Polycarbonate |
| Finishes | White |

| | |
|---|---|
| Code | ☐ 5018 |


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 100/277 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/6




## Noi switch






## Noi dimmable






## Technical Information

| | Noi switch | Noi dimmable |
|---|---|---|
| Power | 14W | 14W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | 3.000K / 4.000K |
| Lumens | 1.320 lm | 1.100 lm / 1.320 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White | White |

| Code | | |
|---|---|---|
| | ☐ 5019 | ☐ 3.000K 3485 |
| | | ☐ 4.000K 3486 |

100/277 VAC | CCT SWITCH

220/240 VAC | TRIAC DIMM


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | 1/6




## Compac round






## Compac square






## Technical Information

| | Compac round | Compac square |
|---|---|---|
| Power | 8W | 8W |
| Installation | Recessed | Recessed |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 594 lm / 607 lm / 660 lm | 594 lm / 607 lm / 660 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White | White |

| Code | | |
|---|---|---|
| ☐ 2.700K | 3951 | ☐ 2.700K 3948 |
| ☐ 3.000K | 3952 | ☐ 3.000K 3949 |
| ☐ 4.000K | 3953 | ☐ 4.000K 3950 |
| ⓘ Custom RAL | | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | PF >0,5 | CRI ≥80 | 90° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | 1/6/30




# Industrial lighting

New


## Ufo Lens switch
60W / 80W / 100W






## Ufo Lens switch
90W / 120W / 150W







## Technical Information

| | | |
|---|---|---|
| Power | Switch 60W / 80W / 100W | Switch 90W / 120W / 150W |
| Installation | Surface | Surface |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 131-167 lm/W | 128-167 lm/W |
| Material | Aluminium | Aluminium |
| Finishes | Black | Black |
| Code | ■ 5147 | ■ 5148 |

## Accessories




Lira 100W/150W/200W
■ 4566

CE RoHS


5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 110° | 50/60 Hz | IK10 | +45°C -25°C | CCT SWITCH | POWER SWITCH | >6KV | 1

New

## Ufo Lens switch
120W / 160W / 200W









## Ufo Lens switch
140W / 190W / 240W










## Technical Information

| | Switch 120W / 160W / 200W | Switch 140W / 190W / 240W |
|---|---|---|
| Power | Switch 120W / 160W / 200W | Switch 140W / 190W / 240W |
| Installation | Surface | Surface |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 123-169 lm/W | 125-156 lm/W |
| Material | Aluminium | Aluminium |
| Finishes | Black | Black |
| Code | ■ 5149 | ■ 5150 |

## Accessories




Lira 100W/150W/200W
■ 4566




Lira 240W
■ 4567

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 110° | 50/60 Hz | IK10 | +45°C -25°C | CCT SWITCH | POWER SWITCH | >6KV | 1








Ufo Lens switch


▶ VIDEO


110º
90º
60º


## Ufo Lens Dali 100W






## Ufo Lens Dali 150W







## Technical Information


| | 100W | 150W |
|---|---|---|
| Power | 100W | 150W |
| Installation | Surface | Surface |
| Color Temperature | 4.000K / 5.000K | 4.000K / 5.000K |
| Lumens | 16.000 lm / 16.200 lm | 24.000 lm / 24.200 lm |
| Material | Aluminium | Aluminium |
| Finishes | Black | Black |

| Code | | |
|---|---|---|
| | ■ 4.000K 4915 | ■ 4.000K 4917 |
| | ■ 5.000K 4916 | ■ 5.000K 4918 |

## Accessories




Lira 100W/150W/200W
■ 4566





Lira 240W
■ 4567

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 120° | 50/60 Hz | IK10 | +50°C -30°C | >4KV | DALI 2 | 1


## Ufo Lens Dali 200W






## Ufo Lens Dali 240W








## Technical Information

| | | |
|---|---|---|
| Power | 200W | 240W |
| Installation | Surface | Surface |
| Color Temperature | 4.000K / 5.000K | 4.000K |
| Lumens | 32.000 lm / 32.200 lm | 38.400 lm |
| Material | Aluminium | Aluminium |
| Finishes | Black | Black |
| Code | ■ 4.000K 4919<br>■ 5.000K 4920 | ■ 4.000K 4921 |

## Accessories




Lira 100W/150W/200W
■ 4566




Lira 240W
■ 4567

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 120° | 50/60 Hz | IK10 | +50°C -30°C | >4KV | DALI 2 | 1



## Rotable Lens

60°

Ufo lens 100W

| 1m | 5m | 11m |
|---|---|---|
| 9.113 lx | 365 lx | 75 lx |

Ufo lens 150W

| 1m | 7m | 14m |
|---|---|---|
| 13.670 lx | 279 lx | 70 lx |

Ufo lens 200W

| 1m | 8m | 16m |
|---|---|---|
| 18.226 lx | 225 lx | 71 lx |

Ufo lens 240W

| 1m | 9m | 19m |
|---|---|---|
| 26.635 lx | 329 lx | 74 lx |




## 90°

| 1m | 5m | 10m |
|---|---|---|
| 7.867 lx | 315 lx | 79 lx |

| 1m | 6m | 13m |
|---|---|---|
| 11.800 lx | 328 lx | 70 lx |

| 1m | 7m | 15m |
|---|---|---|
| 15.733 lx | 321 lx | 70 lx |

| 1m | 9m | 19m |
|---|---|---|
| 26.654 lx | 292 lx | 73 lx |

## 120°

| 1m | 5m | 10m |
|---|---|---|
| 6.638 lx | 266 lx | 66 lx |

| 1m | 6m | 12m |
|---|---|---|
| 9.956 lx | 277 lx | 69 lx |

| 1m | 7m | 14m |
|---|---|---|
| 13.275 lx | 271 lx | 68 lx |

| 1m | 9m | 19m |
|---|---|---|
| 15.882 lx | 324 lx | 68 lx |








# Light output

| 1m | 7m | 14m |
|---|---|---|
| 14.401 lx | 294 lx | 73lx |

## Ufo 300W






## Technical Information


| | |
|---|---|
| Power | 300W |
| Installation | Surface |
| Color Temperature | 4.000K |
| Lumens | 39.000 lm |
| Material | Aluminium |
| Finishes | Gray |

| | |
|---|---|
| Code | 4.000K 3972 |

CE RoHS


*Lira included.

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 110° | 50/60 Hz | IK10 | +50°C -30°C | >4KV | 1

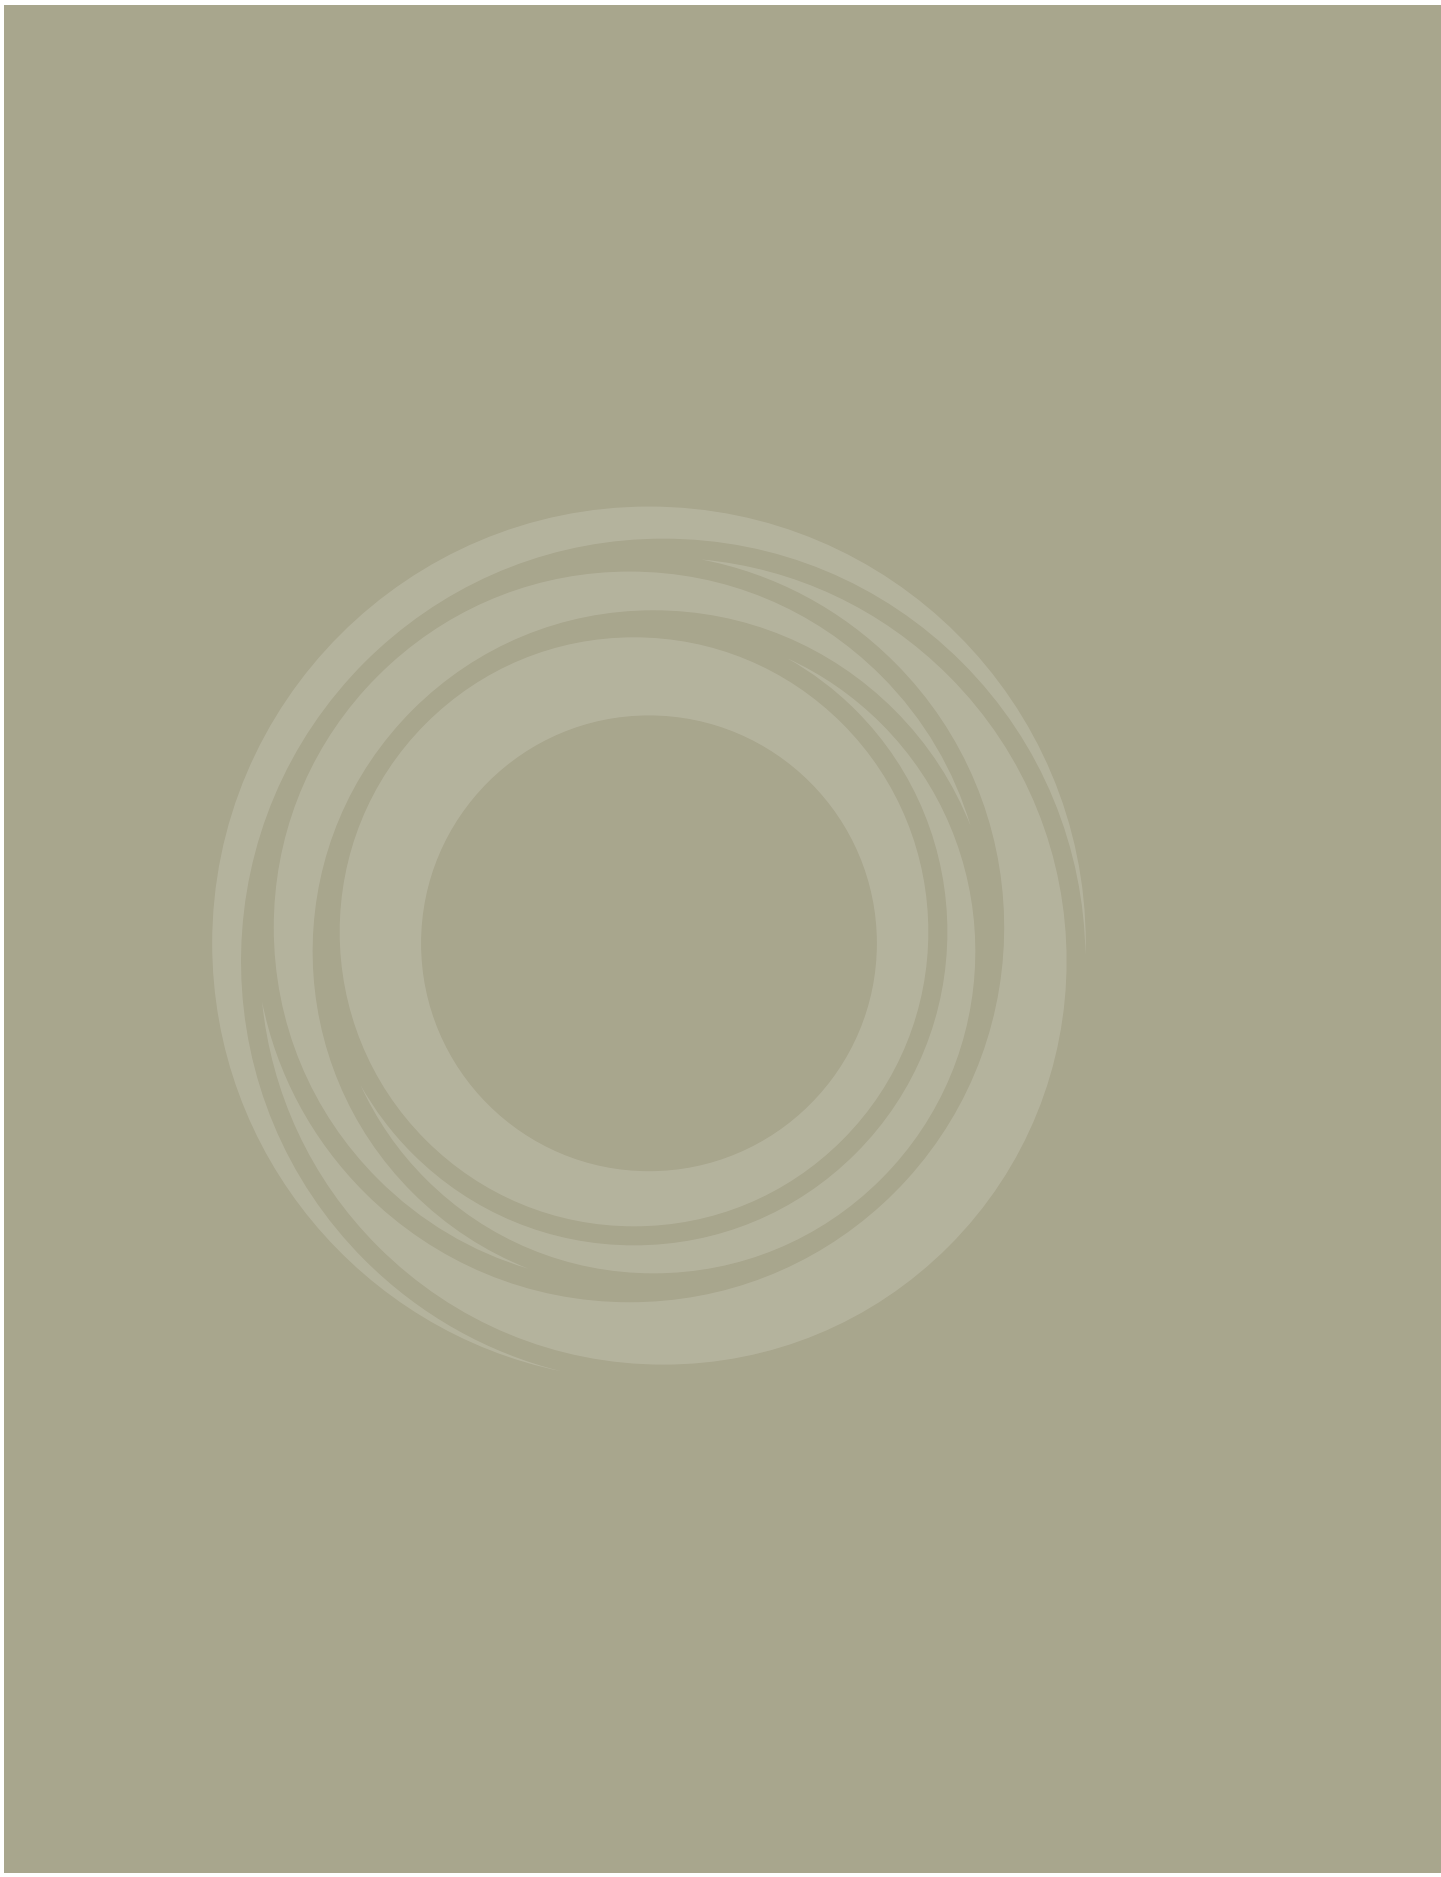

# Outdoor lighting




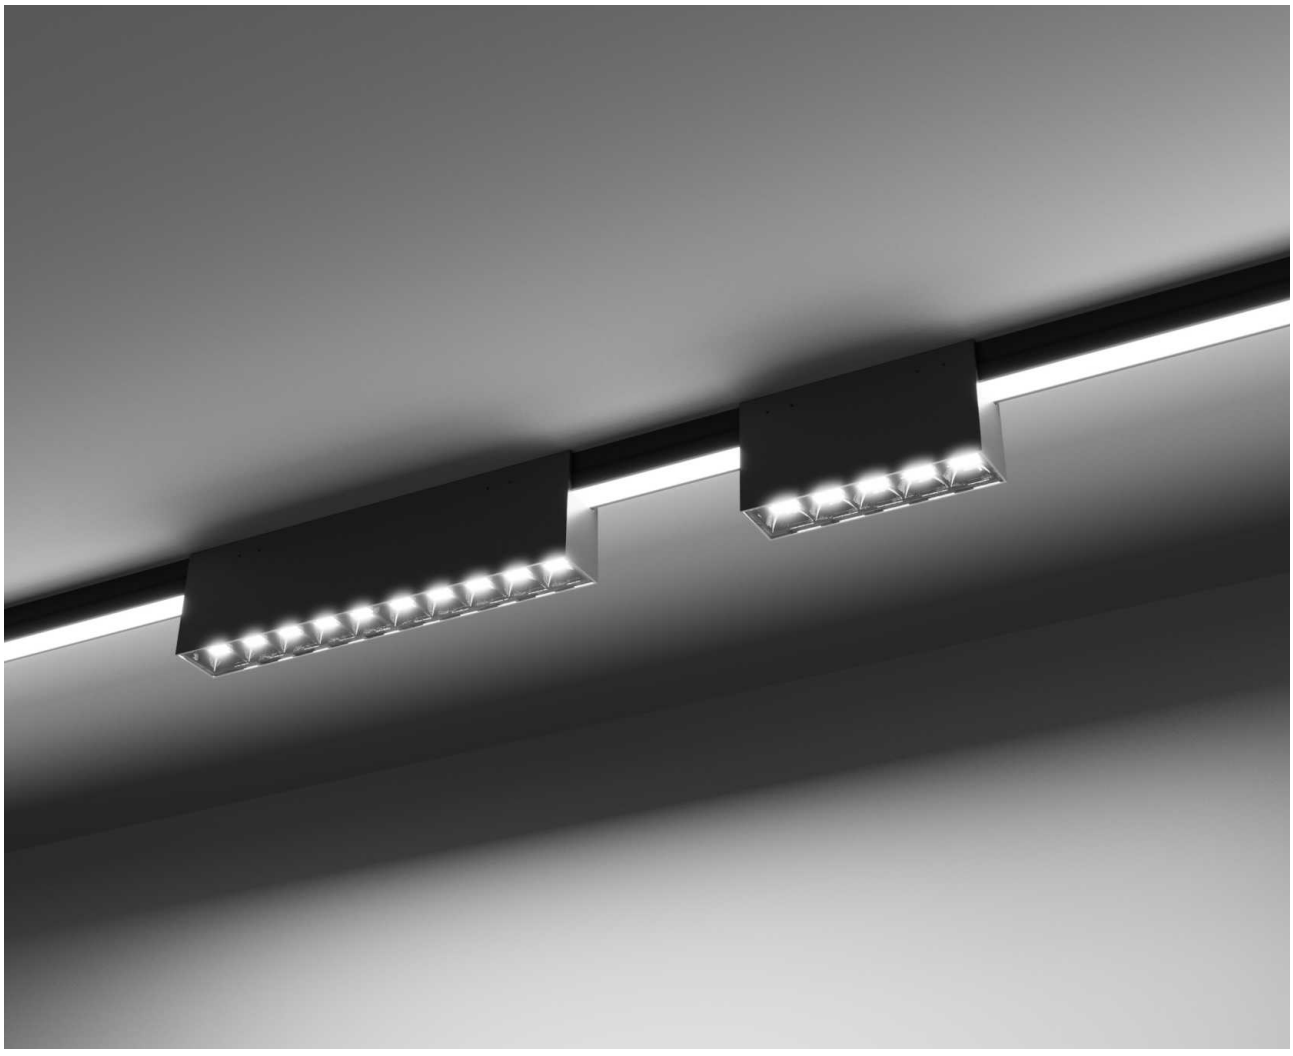

New


## Ice 5






## Ice 10






*Need power supply (page 408).

### Technical Information

| | Ice 5 | Ice 10 |
|---|---|---|
| Power | 10W | 20W |
| Installation | Outdoor Track | Outdoor Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 685 lm | 1.110 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 5384 | ☐ | 2.700K | 5388 |
| | ☐ | 3.000K | 5385 | ☐ | 3.000K | 5389 |
| | ■ | 2.700K | 5386 | ■ | 2.700K | 5390 |
| | ■ | 3.000K | 5387 | ■ | 3.000K | 5391 |
| | | | 1/20 | | | 1/40 |

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | III | 45° | IK06 | +45°C -20°C

New

## Atmos track




*Need power supply (page 408).

## Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Outdoor Track |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 510 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 2.700K | 5392 |
| | ☐ | 3.000K | 5393 |
| | ■ | 2.700K | 5394 |
| | ■ | 3.000K | 5395 |


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | 38° | IK06 | +45°C -20°C | 1/20

New

## Bit






*Need power supply (page 408).

## Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Outdoor Track |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 630 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 2.700K | 5396 |
| | ☐ | 3.000K | 5397 |
| | ■ | 2.700K | 5398 |
| | ■ | 3.000K | 5399 |


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | III | 55° | IK06 | +45°C -20°C | 1/20

New


## Frame 1m







## Frame 2m






## Frame 3m






*Need power supply (page 408).

## Technical Information


| | Frame 1m | Frame 2m | Frame 3m |
|---|---|---|---|
| Power | 10W | 20W | 30W |
| Installation | Outdoor Track | Outdoor Track | Outdoor Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 680 lm | 1.400 lm | 2.055 lm |
| Material | Silicone | Silicone | Silicone |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 5400 | ☐ 2.700K | 5402 | ☐ 2.700K 5404 |
| | ☐ | 3.000K | 5401 | ☐ 3.000K | 5403 | ☐ 3.000K 5405 |

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | CRI ≥90 | 100° | 125mm | IK06 | +45°C -20°C | 1/15

# Outdoor track accessories New

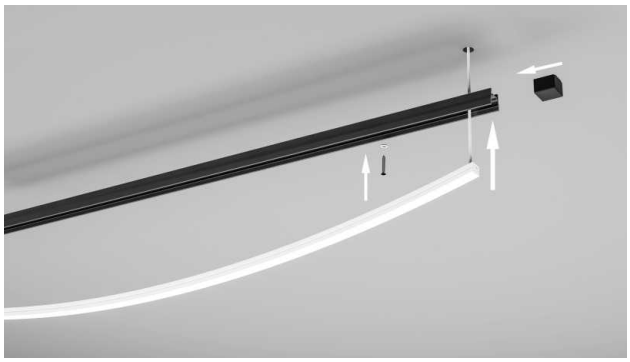









## Outdoor Track
W: 26mm H: 25mm

| | | |
|---|---|---|
| ☐ | 5406 | 1m |
| ☐ | 5407 | 2m |
| ☐ | 5408 | 3m |
| ■ | 5409 | 1m |
| ■ | 5410 | 2m |
| ■ | 5411 | 3m |



## L joint ceiling
L: 70mm W: 70mm H: 26mm

| | |
|---|---|
| ☐ | 5412 |
| ■ | 5413 |



## L joint wall ceiling
L: 70mm W: 70mm H: 30mm

| | |
|---|---|
| ☐ | 5425 |
| ■ | 5426 |



## Linear joint
L: 100mm W: 30mm H: 26mm

| | |
|---|---|
| ☐ | 5414 |
| ■ | 5415 |



## End cap
L: 62mm W: 30mm H: 26mm

| | |
|---|---|
| ☐ | 5416 |
| ■ | 5417 |



## Waterproof silicone cover
L: 20mm W: 14mm H: 4mm

| | |
|---|---|
| ☐ | 5418 |

Power supplies 48V (page 408).


CE RoHS

3 YEARS WARRANTY | IP 65 | IK06




## Mac 30






## Mac 60






## Technical Information

| | Mac 30 | Mac 60 |
|---|---|---|
| Power | 12W | 12W |
| Installation | Floor | Floor |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 890 lm / 900 lm | 890 lm / 900 lm |
| Material | Aluminium and Polycarbonate | Aluminium and Polycarbonate |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 3.000K | 4837 | ☐ | 3.000K | 4843 |
| | ☐ | 4.000K | 4838 | ☐ | 4.000K | 4844 |
| | ■ | 3.000K | 4839 | ■ | 3.000K | 4845 |
| | ■ | 4.000K | 4840 | ■ | 4.000K | 4846 |
| | ■ | 3.000K | 4841 | ■ | 3.000K | 4847 |
| | ■ | 4.000K | 4842 | ■ | 4.000K | 4848 |
| | | | 1/12 | | | 1/6 |

CE RoHS


3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | IK06 | +50°C -20°C



New

## Mac wall base






## Technical Information

| | |
|---|---|
| Power | 12W |
| Installation | Wall |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.020 lm |
| Material | Aluminium and Polycarbonate |
| Finishes | White / Black / Corten |

| Code | |
|---|---|
| | 5264 |
| | 5265 |
| | 5266 |


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 110° | 50/60 Hz | IK06 | +50°C -20°C | CCT SWITCH | 1/6




## Tura 30






## Tura 60






## Technical Information

| | Tura 30 | Tura 60 |
|---|---|---|
| Power | 12W | 12W |
| Installation | Floor | Floor |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 950 lm / 960 lm | 950 lm / 960 lm |
| Material | Aluminium and Methacrylate | Aluminium and Methacrylate |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 3.000K | 4849 | ☐ | 3.000K | 4855 |
| | ☐ | 4.000K | 4850 | ☐ | 4.000K | 4856 |
| | ■ | 3.000K | 4851 | ■ | 3.000K | 4857 |
| | ■ | 4.000K | 4852 | ■ | 4.000K | 4858 |
| | ■ | 3.000K | 4853 | ■ | 3.000K | 4859 |
| | ■ | 4.000K | 4854 | ■ | 4.000K | 4860 |
| | | | 1/6 | | | 1/4 |


CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 180° | 50/60 Hz | IK06 | +50°C -20°C




## Clos 8W






## Clos 16W






*Accessories (pages 562 and 563).

## Technical Information

| | 8W | 16W |
|---|---|---|
| Power | 8W | 16W |
| Installation | Surface / Floor | Surface / Floor |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 1.000 lm | 2.100 lm |
| Material | Aluminium and polycarbonate | Aluminium and polycarbonate |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | |
|---|---|---|
| | ☐ 4876 | ☐ 4879 |
| | ■ 4877 | ■ 4880 |
| | ■ 4878 | ■ 4881 |

120° 120°


CE RoHS EMC


5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 175/265 VAC | PF >0,9 | CRI ≥80 | 50/60 Hz | IK08 | +40°C -25°C | CCT SWITCH | 1/20

| Clos 8W base 30cm | Clos 16W base 30cm |
|---|---|








*Need Clos (page 561).

## Technical Information

| | | |
|---|---|---|
| Installation | Surface / Floor | Surface / Floor |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | |
|---|---|---|
| | ☐ 4882 | ☐ 4888 |
| | ■ 4883 | ■ 4889 |
| | ■ 4884 | ■ 4890 |







5 YEARS WARRANTY | IK08 | 1/24

| Clos 8W base 60cm | Clos 16W base 60cm |
|---|---|








*Need Clos (page 561).

## Technical Information

| | | |
|---|---|---|
| Installation | Surface / Floor | Surface / Floor |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |


| Code | | |
|---|---|---|
| | ☐ 4885 | ☐ 4891 |
| | ■ 4886 | ■ 4892 |
| | ■ 4887 | ■ 4893 |

5 YEARS WARRANTY | IK08 | 1/12




## Mini comet






## Comet






## Technical Information

| | Mini comet | Comet |
|---|---|---|
| Power | Switch 10W / 20W | Switch 20W / 40W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 10W: 1.250 lm / 20W 2.400 lm | 20W: 2.500 lm / 40W: 5.000 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | |
|---|---|---|
| | ☐ 5075 | ☐ 5073 |
| | ■ 5076 | ■ 5074 |
| | ■ 5113 | ■ 5112 |
| | 1/16 | 1/6 |


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40°x90° | 50/60 Hz | IK10 | +45°C -25°C | AKZO NOBEL | CCT SWITCH | POWER SWITCH | TRIAC DIMM




## Cam 60






## Cam 110






## Technical Information

| | Cam 60 | Cam 110 |
|---|---|---|
| Power | 9W | 9W |
| Installation | Floor | Floor |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 690 lm / 700 lm | 690 lm / 700 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 3.000K | 4709 | ☐ | 3.000K | 3751 |
| | ☐ | 4.000K | 3586 | ☐ | 4.000K | 3752 |
| | ■ | 3.000K | 4710 | ■ | 3.000K | 3753 |
| | ■ | 4.000K | 3590 | ■ | 4.000K | 3754 |
| | | | 1/4 | | | 1/2 |


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 54 | 220/240 VAC | PF >0,7 | CRI ≥80 | 120° | 50 Hz | IK08 | +45°C -25°C





## Neo






## Neo XL






## Technical Information

| | Neo | Neo XL |
|---|---|---|
| Power | 9W | 18W |
| Installation | Surface | Surface |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 690 lm / 700 lm | 1.640 lm / 1.650 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |


| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 3.000K | 3747 | ☐ | 3.000K | 3890 |
| | ☐ | 4.000K | 3748 | ☐ | 4.000K | 3891 |
| | ■ | 3.000K | 3749 | ■ | 3.000K | 3892 |
| | ■ | 4.000K | 3750 | ■ | 4.000K | 3893 |
| | IP 54 \| 220/240 VAC \| PF >0,7 \| 1/12 | | | IP 65 \| 100/240 VAC \| PF >0,9 \| 1/4 | | |

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | CRI ≥80 | 120° | 50 Hz | IK08 | +45°C -25°C


## Neo sensor






## Neo XL sensor






### Technical Information


| | Neo sensor | Neo XL sensor |
|---|---|---|
| Power | 9W | 18W |
| Installation | Surface | Surface |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 690 lm / 700 lm | 1.640 lm / 1.650 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 3.000K | 3585 | ☐ | 3.000K | 3886 |
| | ☐ | 4.000K | 3583 | ☐ | 4.000K | 3887 |
| | ■ | 3.000K | 3584 | ■ | 3.000K | 3888 |
| | ■ | 4.000K | 3582 | ■ | 4.000K | 3889 |
| | | 220/240 VAC \| PF >0,7 \| 1/12 | | | 100/240 VAC \| PF >0,9 \| 1/4 | |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 54 | CRI ≥80 | 120° | 50 Hz | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min



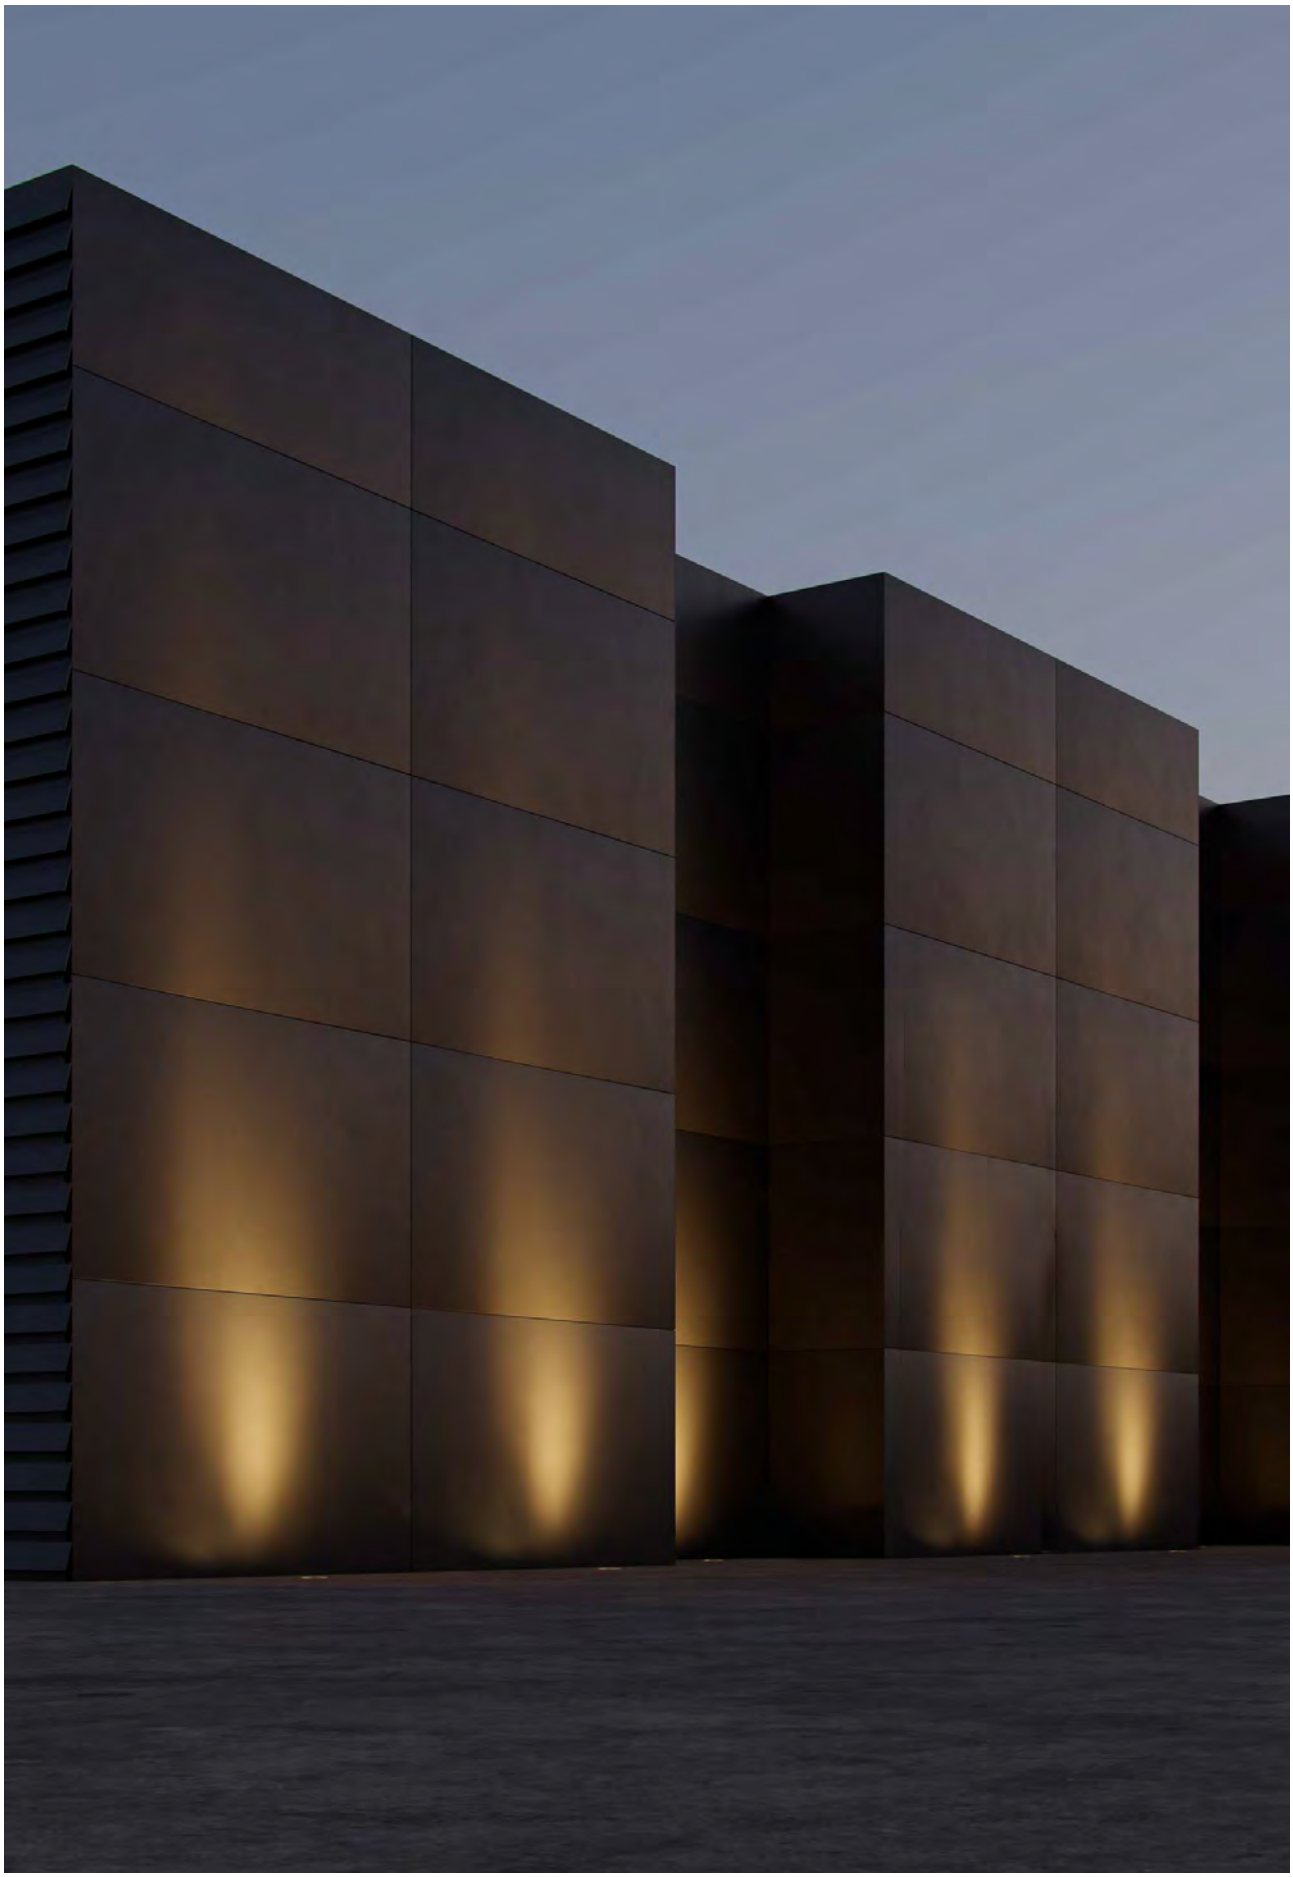


## Sigma 3W






## Sigma 17W






## Technical Information

| | Sigma 3W | Sigma 17W |
|---|---|---|
| Power | 3W | 17W |
| Installation | Recessed | Recessed |
| Color Temperature | 3.000K | 3.000K |
| Lumens | 210 lm | 1.440 lm |
| Material | Aluminium | Aluminium |
| Finishes | Brushed | Brushed |
| Code | 3.000K 4251 | 3.000K 4135 |
| | PF >0,6 \| 1/30 | PF >0,9 \| 1/8 |

CE RoHS EMC


*Integrated driver. Drainage (min. 300mm).

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/277 VAC | CRI ≥80 | CABLE 24CM | 30° | 50/60 Hz | IK05 | +40°C -20°C



## Signal






## Technical Information


| | |
|---|---|
| Power | 9W |
| Installation | Floor / Tree trunk |
| Color Temperature | 3.000K |
| Lumens | 720 lm |
| Material | Aluminium |
| Finishes | Dark gray |

| Code | | | |
|---|---|---|---|
| | ■ | 3.000K | 4290 |

CE RoHS


*Integrated driver. IP65 connection box included.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥80 | CABLE 20CM | 30° | 50/60 Hz | IK05 | +40°C -20°C | 1/25

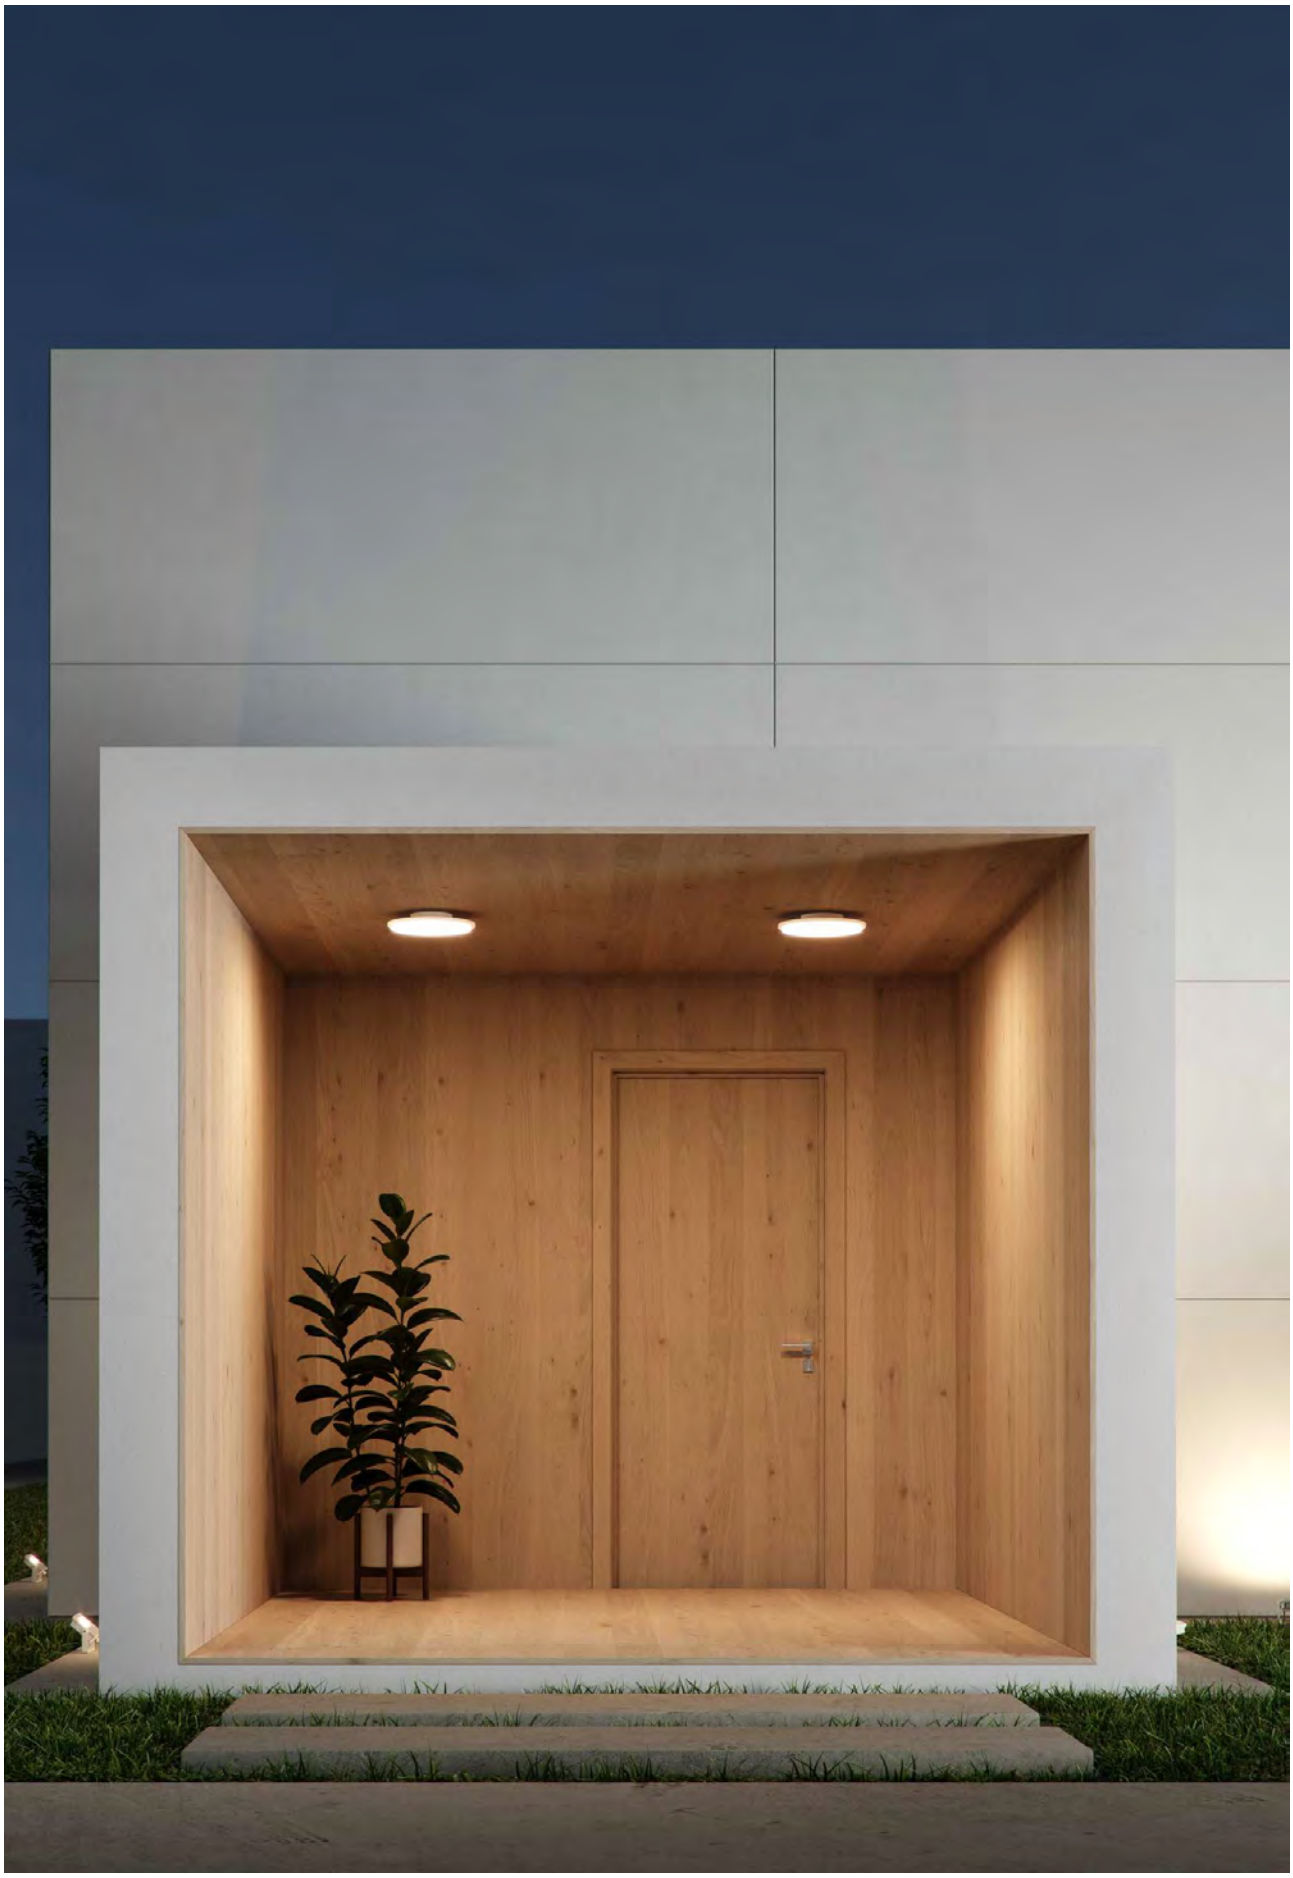

## Gadir






## Technical Information

| | |
|---|---|
| Power | 18W |
| Installation | Surface |
| Color Temperature | 3.000K / 4.000K |
| Lumens | 1.400 lm / 1.500 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 3.000K | 3758 |
| | ☐ | 4.000K | 3589 |
| | ■ | 3.000K | 3757 |
| | ■ | 4.000K | 3593 |
| ⓘ | | Custom RAL | |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 100/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50 Hz | IK08 | +45°C -25°C | 1/4




## Sunset round






## Sunset square






## Technical Information

| | Sunset round | Sunset square |
|---|---|---|
| Power | 16W | 16W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.800 lm | 1.800 lm |
| Material | Policarbonate | Policarbonate |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | |
|---|---|---|
| | 4989 | 4992 |
| | 4990 | 4993 |
| | 4991 | 4994 |
| | Custom RAL | Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/10



New


## Sunset XL






## Sunset XL dual






## Technical Information

| | Sunset XL | Sunset XL dual |
|---|---|---|
| Power | 16W | 2X16W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.300K / 4.000K | Switch 2.700K / 3.300K / 4.000K |
| Lumens | 1.450 lm | 2.900 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | |
|---|---|---|
| | ☐ 5419 | ☐ 5422 |
| | ■ 5420 | ■ 5423 |
| | ■ 5421 | ■ 5424 |
| | 1/20 | 1/15 |


CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥90 | 24° | 50/60 Hz | IK05 | +50°C -25°C | CCT SWITCH




## Lek round






## Lek square






## Technical Information

| | Lek round | Lek square |
|---|---|---|
| Power | 6,8W | 6,8W |
| Installation | Surface | Surface |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 480 lm / 530 lm / 542 lm | 480 lm / 530 lm / 542 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | | Lek round | | Lek square |
|---|---|---|---|---|---|
| | ☐ | 2.700K | 4906 | 4303 | |
| | ☐ | 3.000K | 4907 | 3983 | |
| | ☐ | 4.000K | 4908 | 3984 | |
| | ■ | 2.700K | 4909 | 4304 | |
| | ■ | 3.000K | 4910 | 3985 | |
| | ■ | 4.000K | 4911 | 3986 | |
| | ■ | 2.700K | 4912 | 4312 | |
| | ■ | 3.000K | 4913 | 3987 | |
| | ■ | 4.000K | 4914 | 3988 | |
| ⓘ | | Custom RAL | | ⓘ | Custom RAL |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 54 | 220/240 VAC | PF >0,9 | CRI ≥80 | 0°-120° | 50/60 Hz | IK04 | +40°C -10°C | AKZO NOBEL | 1/12




## Blis round







## Blis square







## Blis rectangular






### Technical Information


| | Blis round | Blis square | Blis rectangular |
|---|---|---|---|
| Power | 15W | 15W | 24W |
| Installation | Surface | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.470 lm | 1.370 lm | 2.360 lm |
| Material | Polycarbonate | Polycarbonate | Polycarbonate |
| Finishes | White / Black / Corten | White / Black / Corten | White / Black / Corten |

| Code | | | |
|---|---|---|---|
| | 4957 | 4960 | 4982 |
| | 4958 | 4961 | 4983 |
| | 4959 | 4962 | 4984 |
| | PF >0,6 \| 250° | PF >0,6 \| 180° | PF >0,9 \| 180° |

CE RoHS EMC


*IP65 connection box included.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | CRI ≥80 | 50/60 Hz | IK04 | +40°C -20°C | CCT SWITCH | 1/6

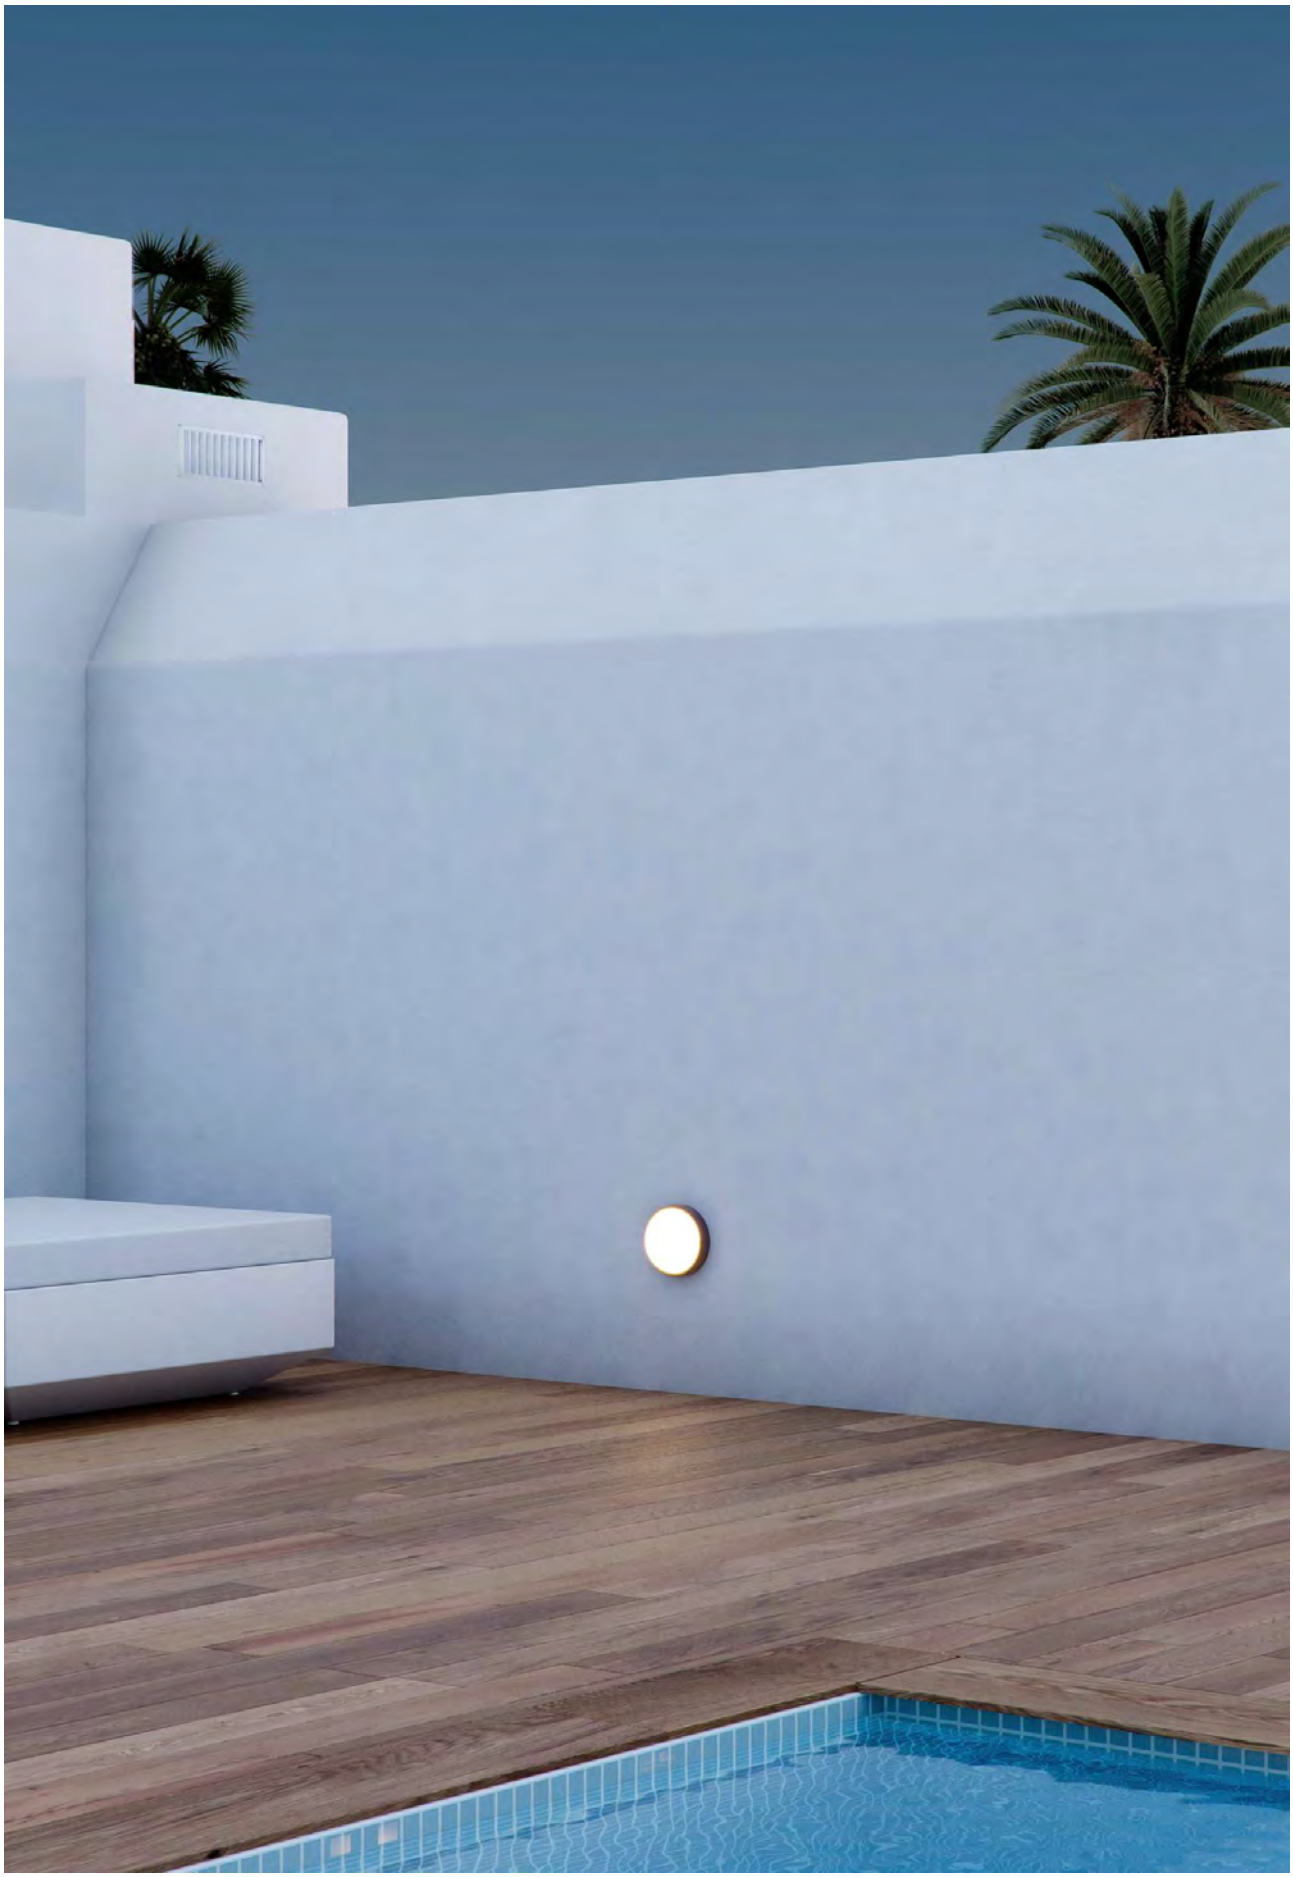

## Selen






## Technical Information

| | |
|---|---|
| Power | 12W |
| Installation | Surface |
| Color Temperature | 3.000K / 4.000K |
| Lumens | 1.200 lm / 1.250 lm |
| Material | Polycarbonate |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 3.000K | 4668 |
| | ☐ | 4.000K | 4667 |
| | ■ | 3.000K | 4828 |
| | ■ | 4.000K | 4827 |
| ⓘ | | Custom RAL | |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK02 | +40°C -20°C | 1/10



## Zibor






## Technical Information

| | |
|---|---|
| Power | 12W |
| Installation | Surface |
| Color Temperature | 3.000K / 4.000K |
| Lumens | 1.200 lm / 1.250 lm |
| Material | Polycarbonate |
| Finishes | White / Black |


| Code | | | |
|---|---|---|---|
| | ☐ | 3.000K | 4670 |
| | ☐ | 4.000K | 4669 |
| | ■ | 3.000K | 4830 |
| | ■ | 4.000K | 4829 |
| ⓘ | | Custom RAL | |



CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK02 | +40°C -20°C | 1/10



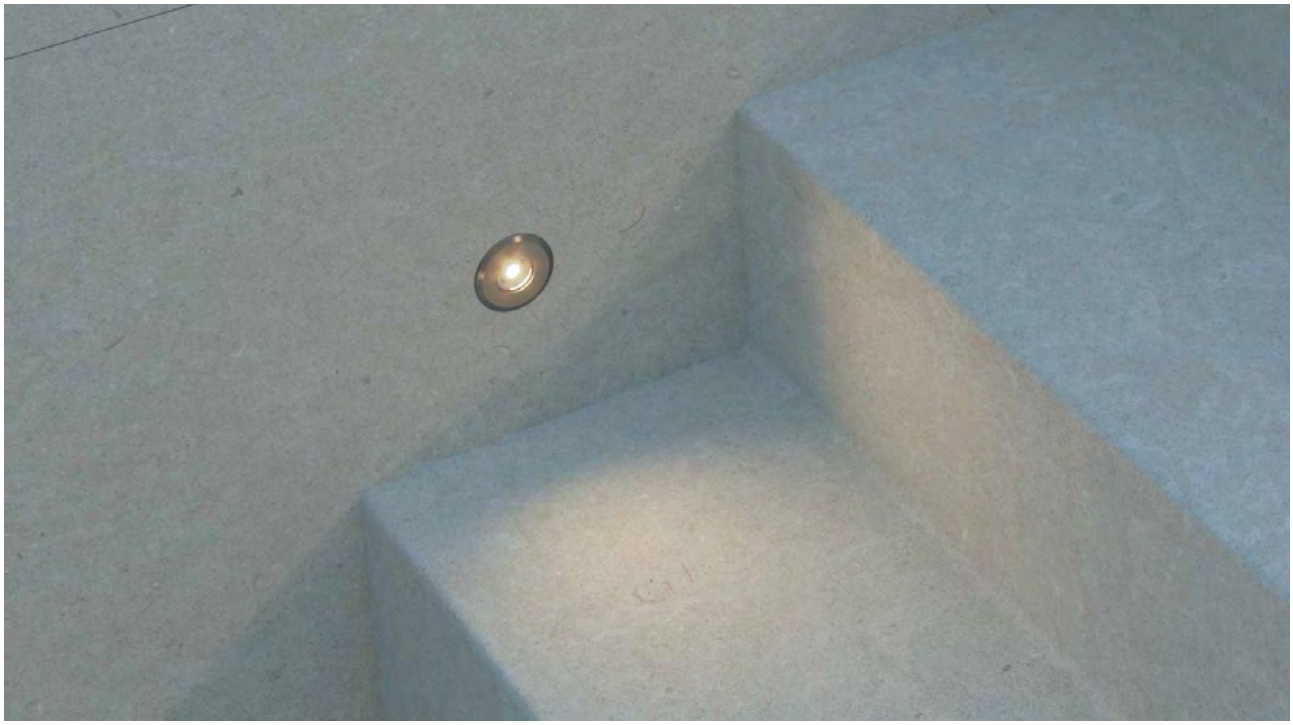



| Optic | Nix |
|---|---|
|  |  |
|  |  |
|  |  |



## Technical Information

| | Optic | Nix |
|---|---|---|
| Power | 2W | 2W |
| Installation | Recessed | Recessed |
| Color Temperature | 3.000K | 3.000K |
| Lumens | 55 lm | 55 lm |
| Material | Inox 304 | Inox 304 |
| Finishes | Brushed Inox | Brushed Inox |
| Code | 4331 | 4369 |







CE RoHS

*Recessed box included. Integrated driver.

3 YEARS WARRANTY | 50.000 HOURS | IP 67 | 100/240 VAC | PF >0,4 | CRI ≥80 | CABLE 50CM | 50/60 Hz | IK09 | +50°C -20°C | 1/50

| Ina | Dis |
|---|---|
|  |  |
|  |  |
|  |  |

## Technical Information

| | Ina | Dis |
|---|---|---|
| Power | 2W | 2W |
| Installation | Recessed | Recessed |
| Color Temperature | 3.000K | 3.000K |
| Lumens | 55 lm | 55 lm |
| Material | Inox 304 | Inox 304 |
| Finishes | Brushed Inox | Brushed Inox |
| Code | 4367 | 4368 |

1.000Kg

1.000Kg

CE RoHS

*Recessed box included. Integrated driver.

3 YEARS WARRANTY | 50.000 HOURS | IP 67 | 100/240 VAC | PF >0,4 | CRI ≥80 | CABLE 50CM | 50/60 Hz | IK09 | +50°C -20°C | 1/50








Showroom Beneito Faure, La Roca del Valles (Spain).

## Polo



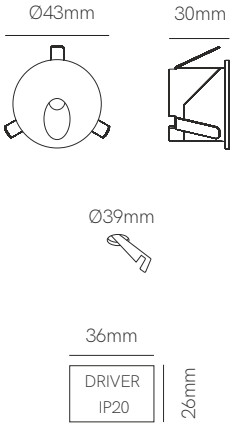


## Technical Information


| | |
|---|---|
| Power | 2W |
| Installation | Recessed |
| Color Temperature | 3.200K / 4.000K |
| Lumens | 90 lm / 96 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 3.200K | 3995 |
| | ☐ | 4.000K | 3996 |
| | ■ | 3.200K | 3997 |
| | ■ | 4.000K | 3998 |
| ⓘ | | Custom RAL | |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 50.000 HOURS | IP 54 | 220/240 VAC | PF >0,5 | CRI ≥80 | 65° | 50/60 Hz | +50°C -20°C | AKZO NOBEL | 1/200

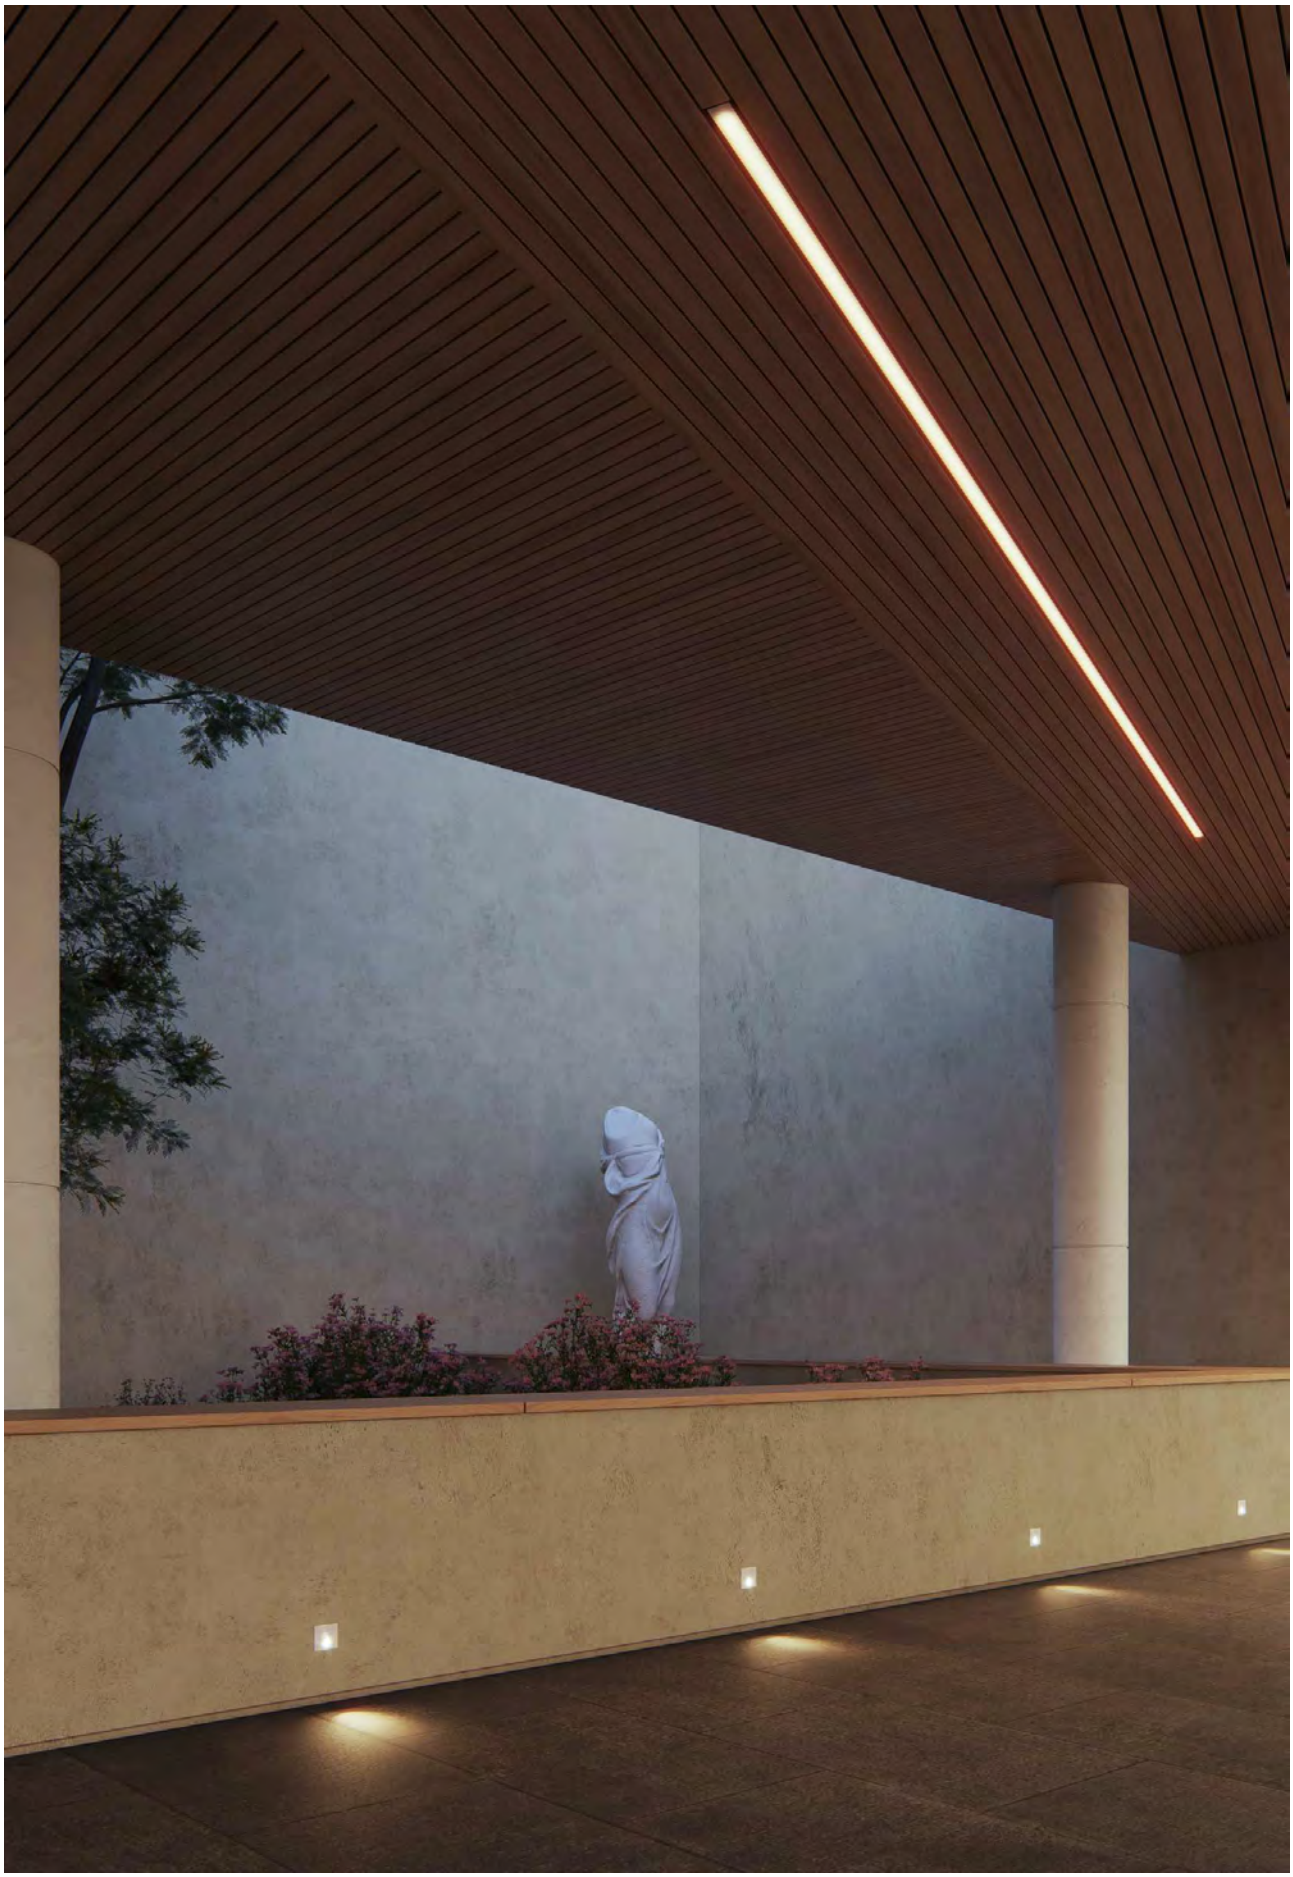

## Luky



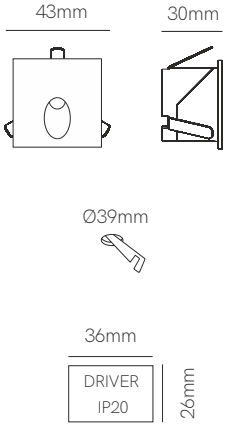


### Technical Information


| | |
|---|---|
| Power | 2W |
| Installation | Recessed |
| Color Temperature | 3.200K / 4.000K |
| Lumens | 90 lm / 96 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 3.200K | 3999 |
| | ☐ | 4.000K | 4000 |
| | ■ | 3.200K | 4001 |
| | ■ | 4.000K | 4002 |
| ⓘ | | Custom RAL | |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 50.000 HOURS | IP 54 | 220/240 VAC | PF >0,5 | CRI ≥80 | 65° | 50/60 Hz | +50°C -20°C | AKZO NOBEL | 1/200

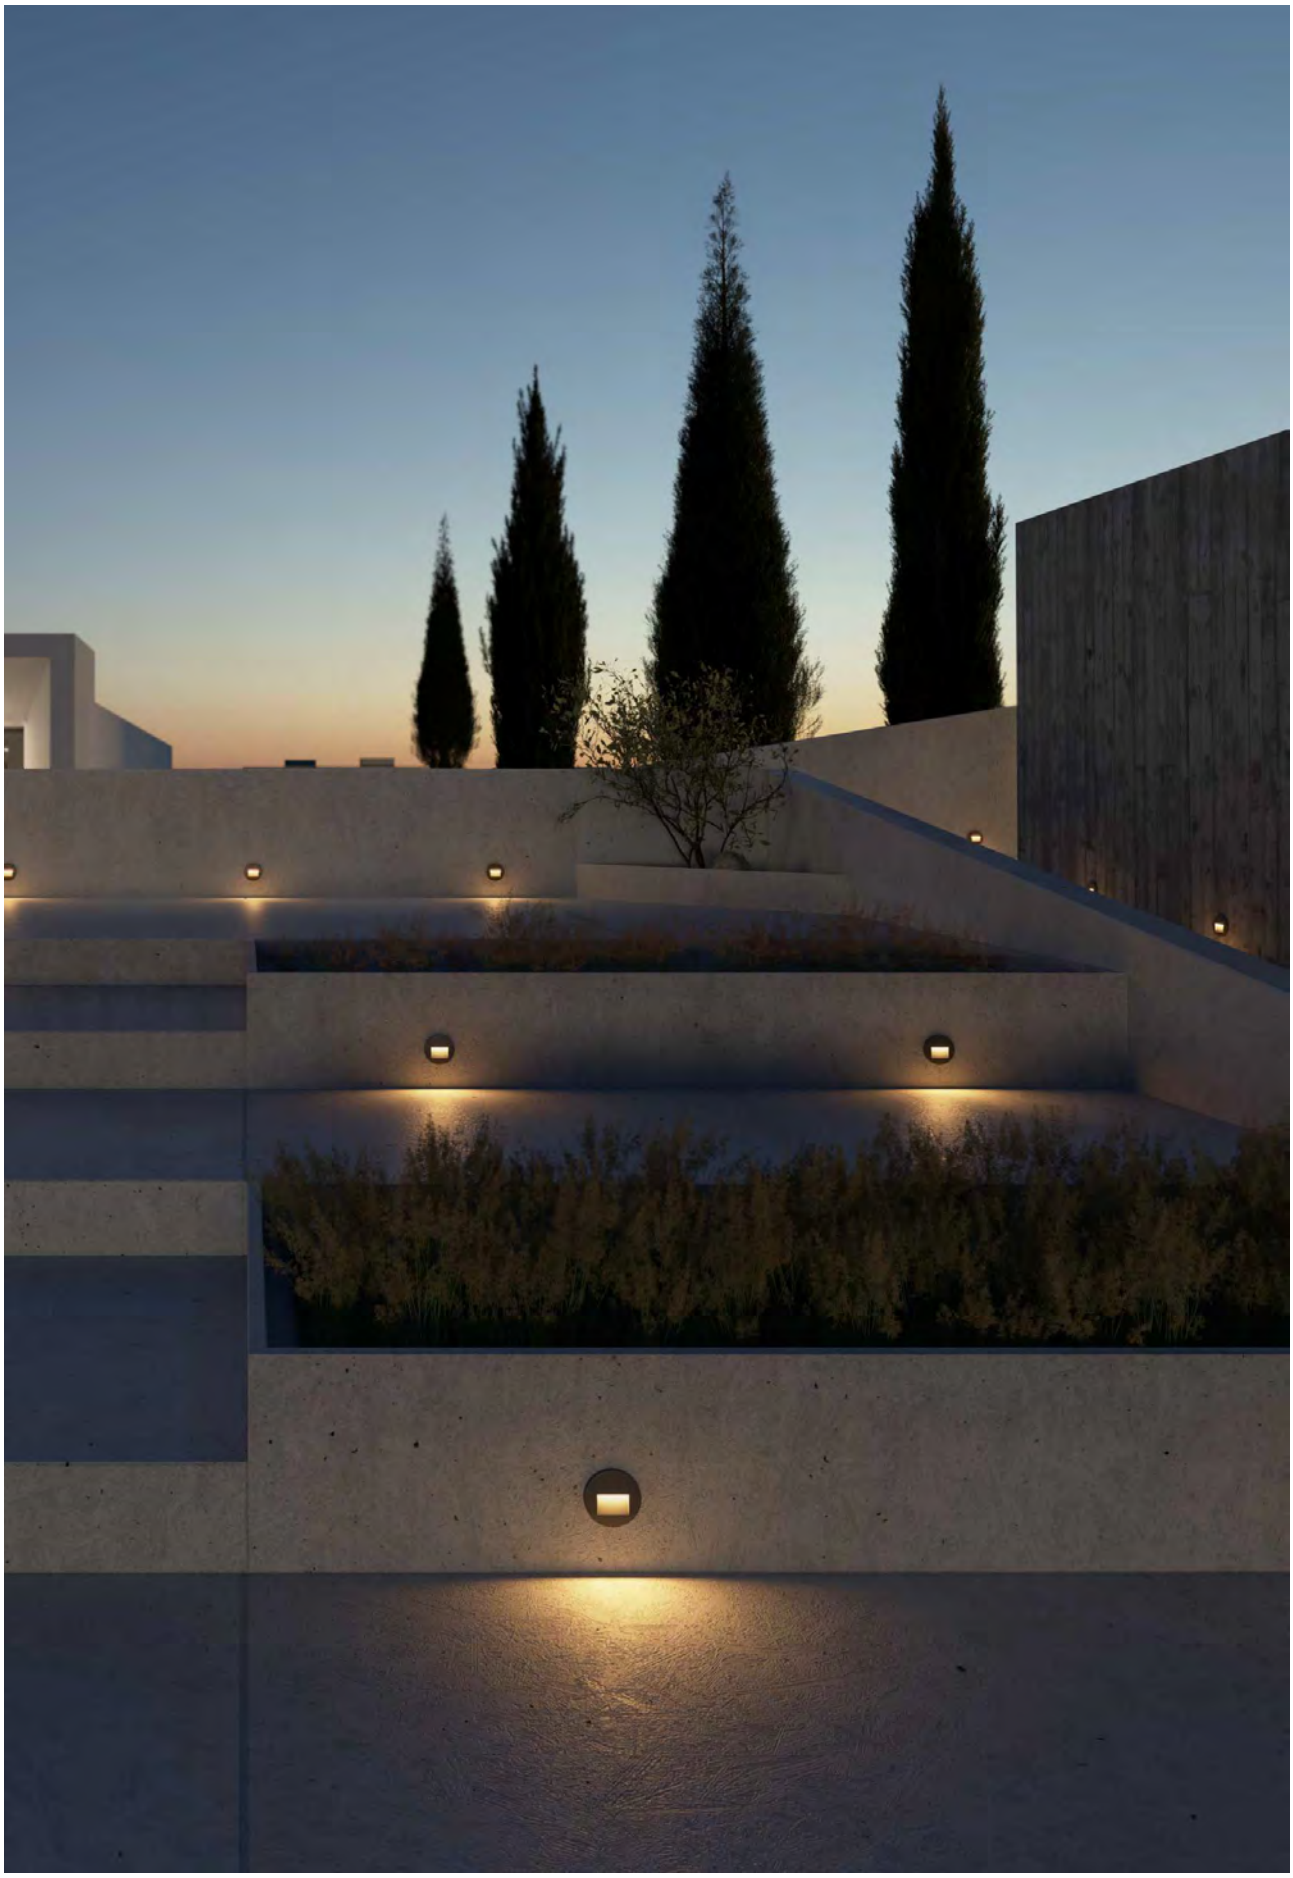

## Mis round switch






## Technical Information

| | |
|---|---|
| Power | 3W |
| Installation | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 200 lm |
| Material | Polycarbonate |
| Finishes | White / Black / Corten |

| Code | |
|---|---|
| | 5020 |
| | 5021 |
| | 5022 |
| ⓘ | Custom RAL |


CE RoHS

*Integrated driver.
ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,5 | CRI ≥80 | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/10/50

## Mis square switch






## Technical Information

| | |
|---|---|
| Power | 3W |
| Installation | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 140 lm |
| Material | Polycarbonate |
| Finishes | White / Black / Corten |

| | |
|---|---|
| Code | ☐ 5023 |
| | ■ 5024 |
| | ■ 5025 |
| | ⓘ Custom RAL |

CE RoHS

*Integrated driver.
ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,5 | CRI ≥80 | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/10/50






New

## Artis square









Recessed box included
107mm x 73mm x 53mm



Surface box included
103mm x 79mm x 57 mm

## Artis round








Recessed box included
67mm x Ø74mm



Surface box included
54mm x Ø80mm

## Technical Information

| | | |
|---|---|---|
| Power | 4,5W | 4,5W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 130 lm | 130 lm |
| Material | Aluminium and glass | Aluminium and glass |
| Finishes | White | White |
| Code | ☐ 5028 | ☐ 5205 |

CE RoHS

*Recessed and surface box included.


3 YEARS WARRANTY | 25.000 HOURS | IP 66 | 175/265 VAC | PF >0,5 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +50°C -20°C | CCT SWITCH | 1/20



New


## Tween surface







## Tween recessed



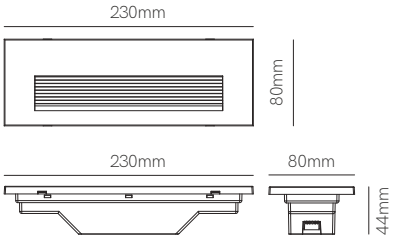


Recessed box included


## Technical Information

| | Tween surface | Tween recessed |
|---|---|---|
| Power | 5W | 5W |
| Installation | Surface | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 360 lm | 360 lm |
| Material | Polycarbonate | Polycarbonate |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | |
|---|---|---|
| | ☐ 5196 | ☐ 5199 |
| | ■ 5197 | ■ 5200 |
| | ■ 5198 | ■ 5201 |


CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 110/240 VAC | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/50

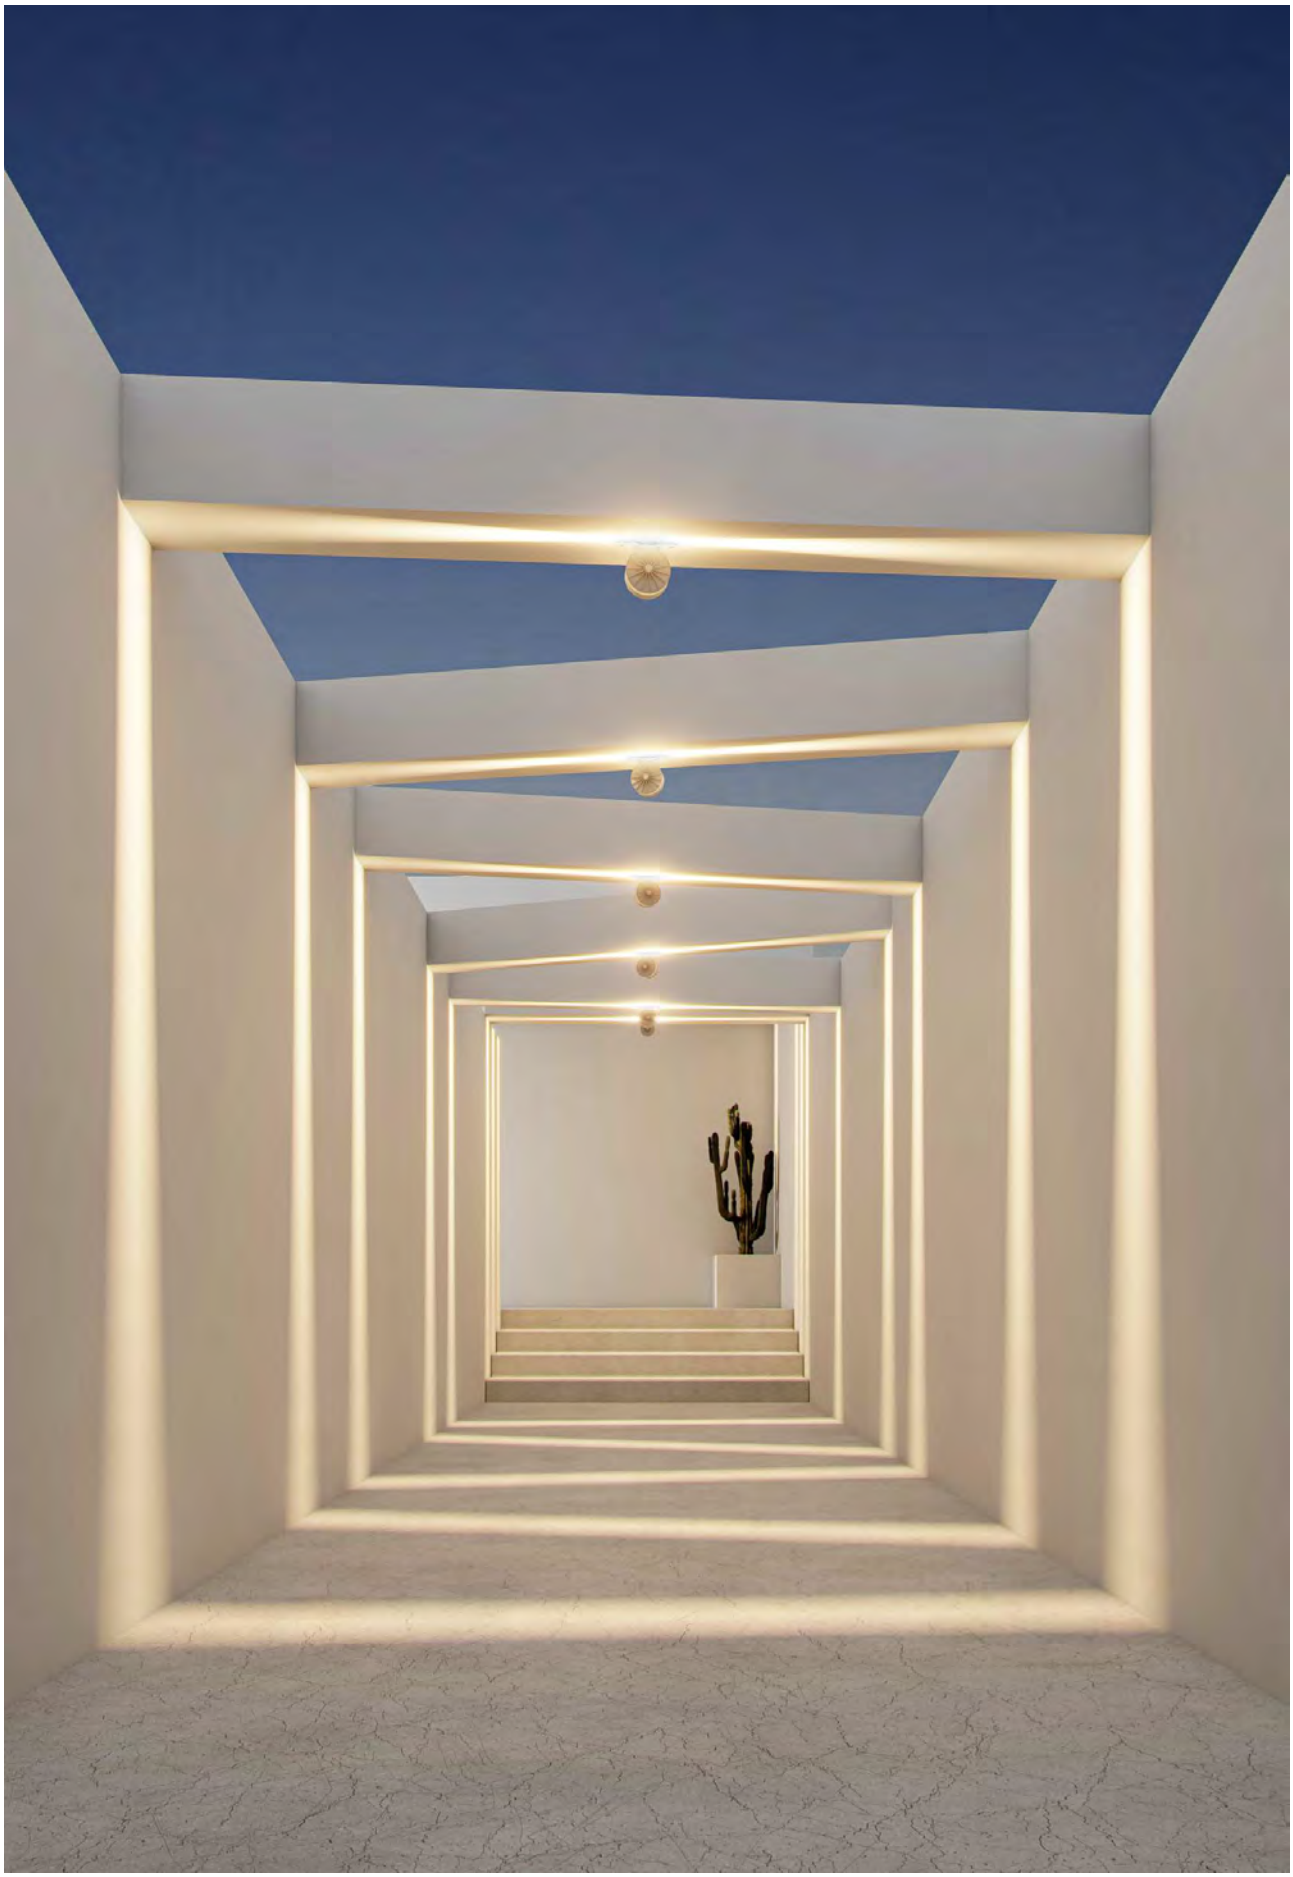

## Nik






### Technical Information


| | |
|---|---|
| Power | 5W |
| Installation | Surface |
| Color Temperature | 3.000K / 4.000K |
| Lumens | 340 lm / 350 lm |
| Material | Aluminium |
| Finishes | Gray |

| Code | | |
|---|---|---|
| | 3.000K | 4291 |
| | 4.000K | 4292 |

CE RoHS


*Integrated driver.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥70 | 5° | 50/60 Hz | IK05 | +40°C -20°C | 1/40

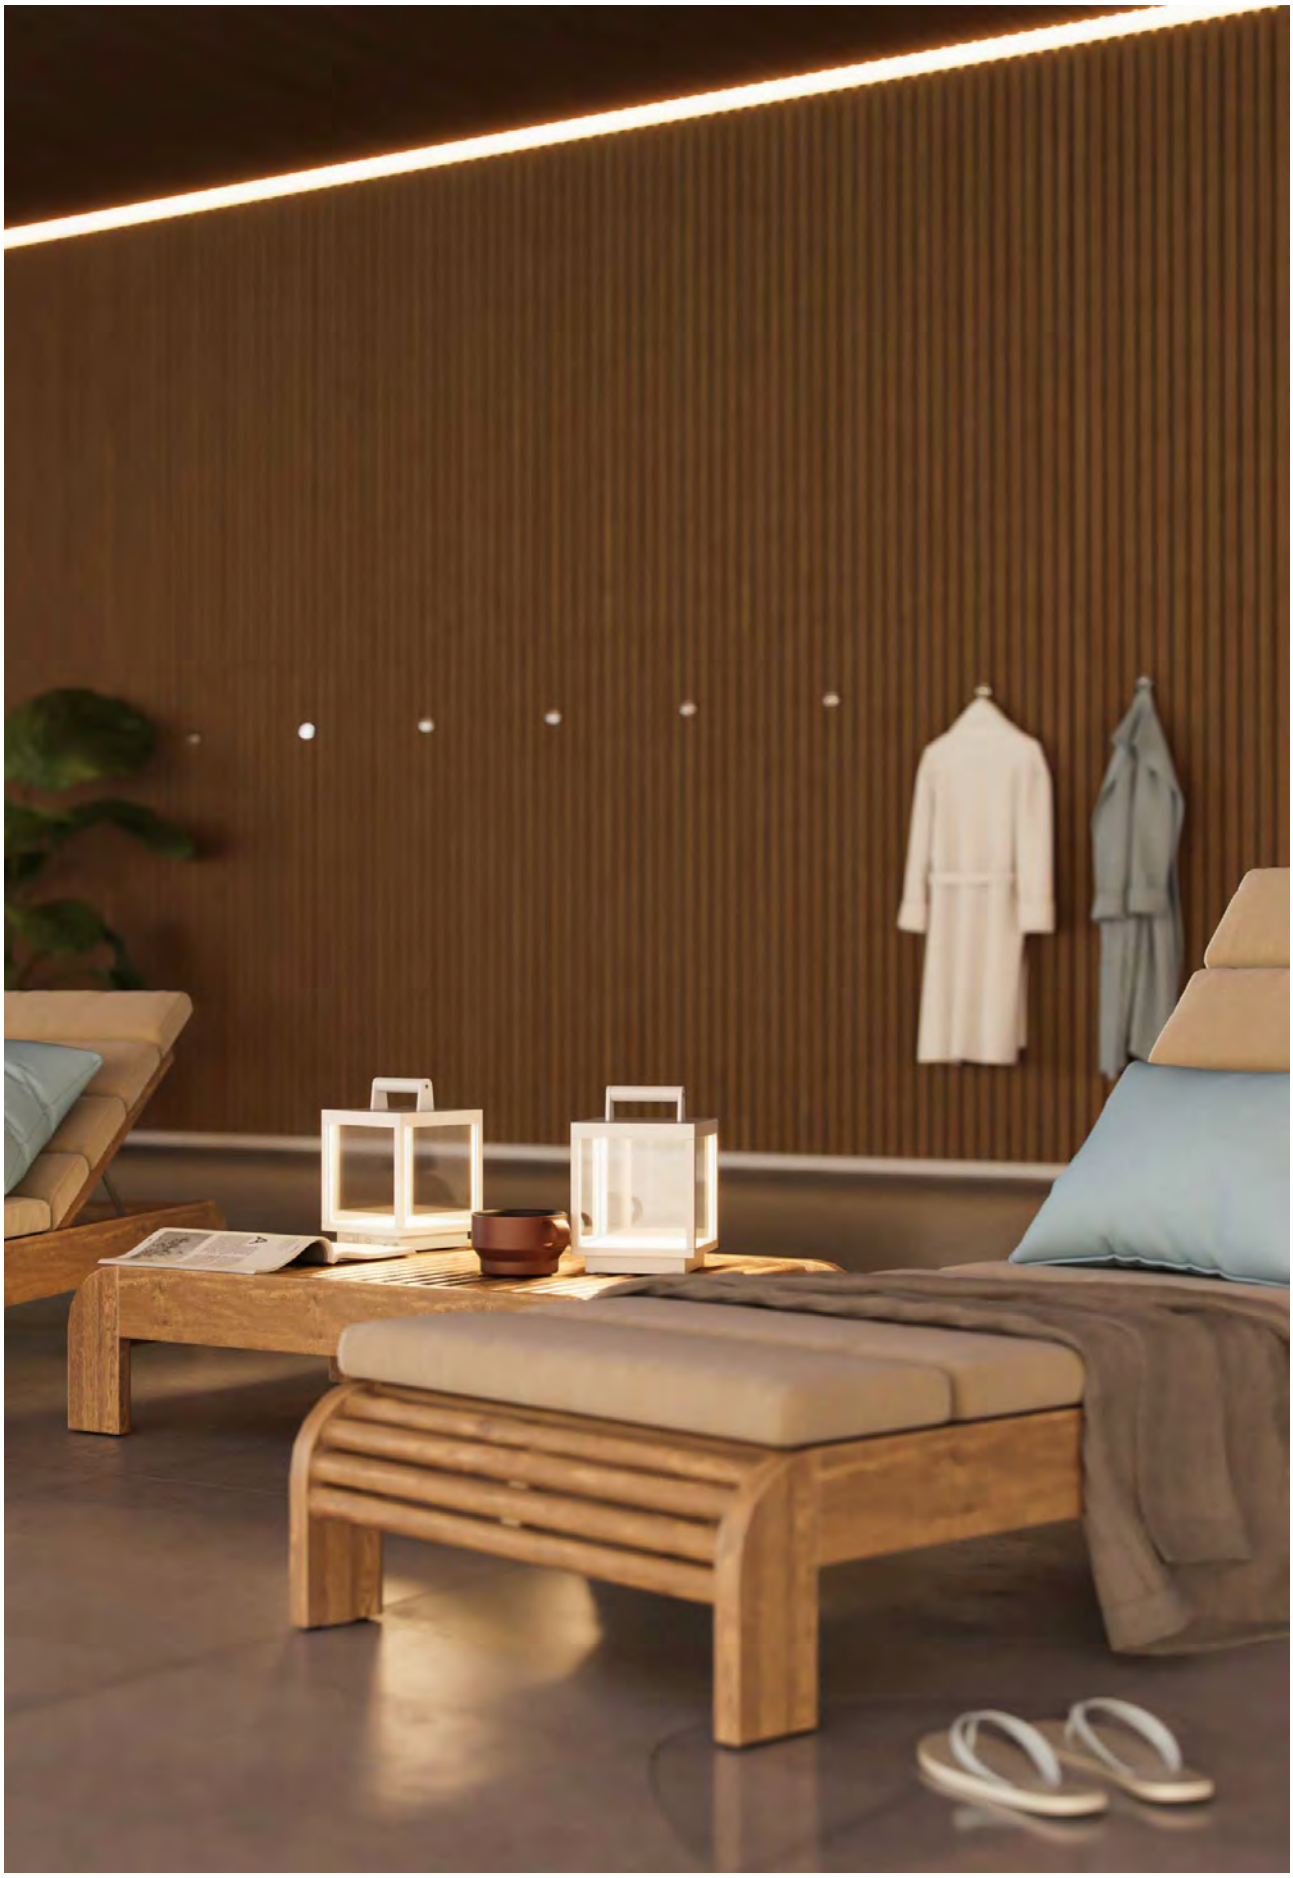

## Visor






## Technical Information

| | |
|---|---|
| Power | 5W |
| Installation | Portable |
| Color Temperature | 3.000K |
| Lumens | 460 lm / 230 lm / 46 lm |
| Material | Aluminium |
| Finishes | White / Corten |

| Code | |
|---|---|
| | 3929 |
| | 3931 |

CE RoHS


*Charger by USB. Charger included.

3 YEARS WARRANTY BATTERY 2 YEARS | 30.000 HOURS | POWER BANK | 6,5 HOURS | 5/11/25 HOURS | 3,7V USB | 7.800 mAh | IP 65 | CRI ≥80 | 120° | IK05 | 3 INTENSITIES | +45°C -20°C | 1/4



## Fix






## Technical Information

| | |
|---|---|
| Installation | Surface / Floor |
| Material | Polypropylene |
| Finishes | Black |
| Lamp Holder | E27 |

| | |
|---|---|
| Code | ■ 4820 |

CE RoHS

*Spike included. Recomended lamp Par 38 (page 704).


3 YEARS WARRANTY | IP 65 | 50/60 Hz | 1/6






## Sair 10W






## Sair 20W






## Technical Information

| | Sair 10W | Sair 20W |
|---|---|---|
| Power | 10W | 20W |
| Installation | Floor | Floor |
| Color Temperature | 3.000K | 3.000K |
| Lumens | 900 lm | 1.500 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | |
|---|---|---|
| ☐ | 4894 | 4897 |
| ■ | 4895 | 4898 |
| ■ | 4896 New | 4899 New |

CE RoHS


*Spike included.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/265 VAC | PF >0,9 | CRI ≥95 | CABLE 24CM | 18° | 50/60 Hz | IK05 | +40°C -20°C | 1/20



## Caddie






## Technical Information

| | |
|---|---|
| Power | 3W |
| Installation | Floor |
| Color Temperature | 3.000K |
| Lumens | 270 lm |
| Material | Aluminium |
| Finishes | Black / Corten |

| Code | |
|---|---|
| | 3581 |
| | 4923 |

CE RoHS EMC


*Spike included.

3 YEARS WARRANTY | 35.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥72 | CABLE 24CM | 45° | 50/60 Hz | IK05 | +40°C -20°C | 1/50



## Fade






## Technical Information


| | |
|---|---|
| Power | 5W |
| Installation | Floor |
| Color Temperature | 3.000K |
| Lumens | 450 lm |
| Material | Aluminium |
| Finishes | Black / Corten |

| Code | |
|---|---|
| | 3580 |
| | 4924 |

CE RoHS


*Spike included.

3 YEARS WARRANTY | 35.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥80 | CABLE 24CM | 45° | 50/60 Hz | IK05 | +40°C -20°C | 1/50

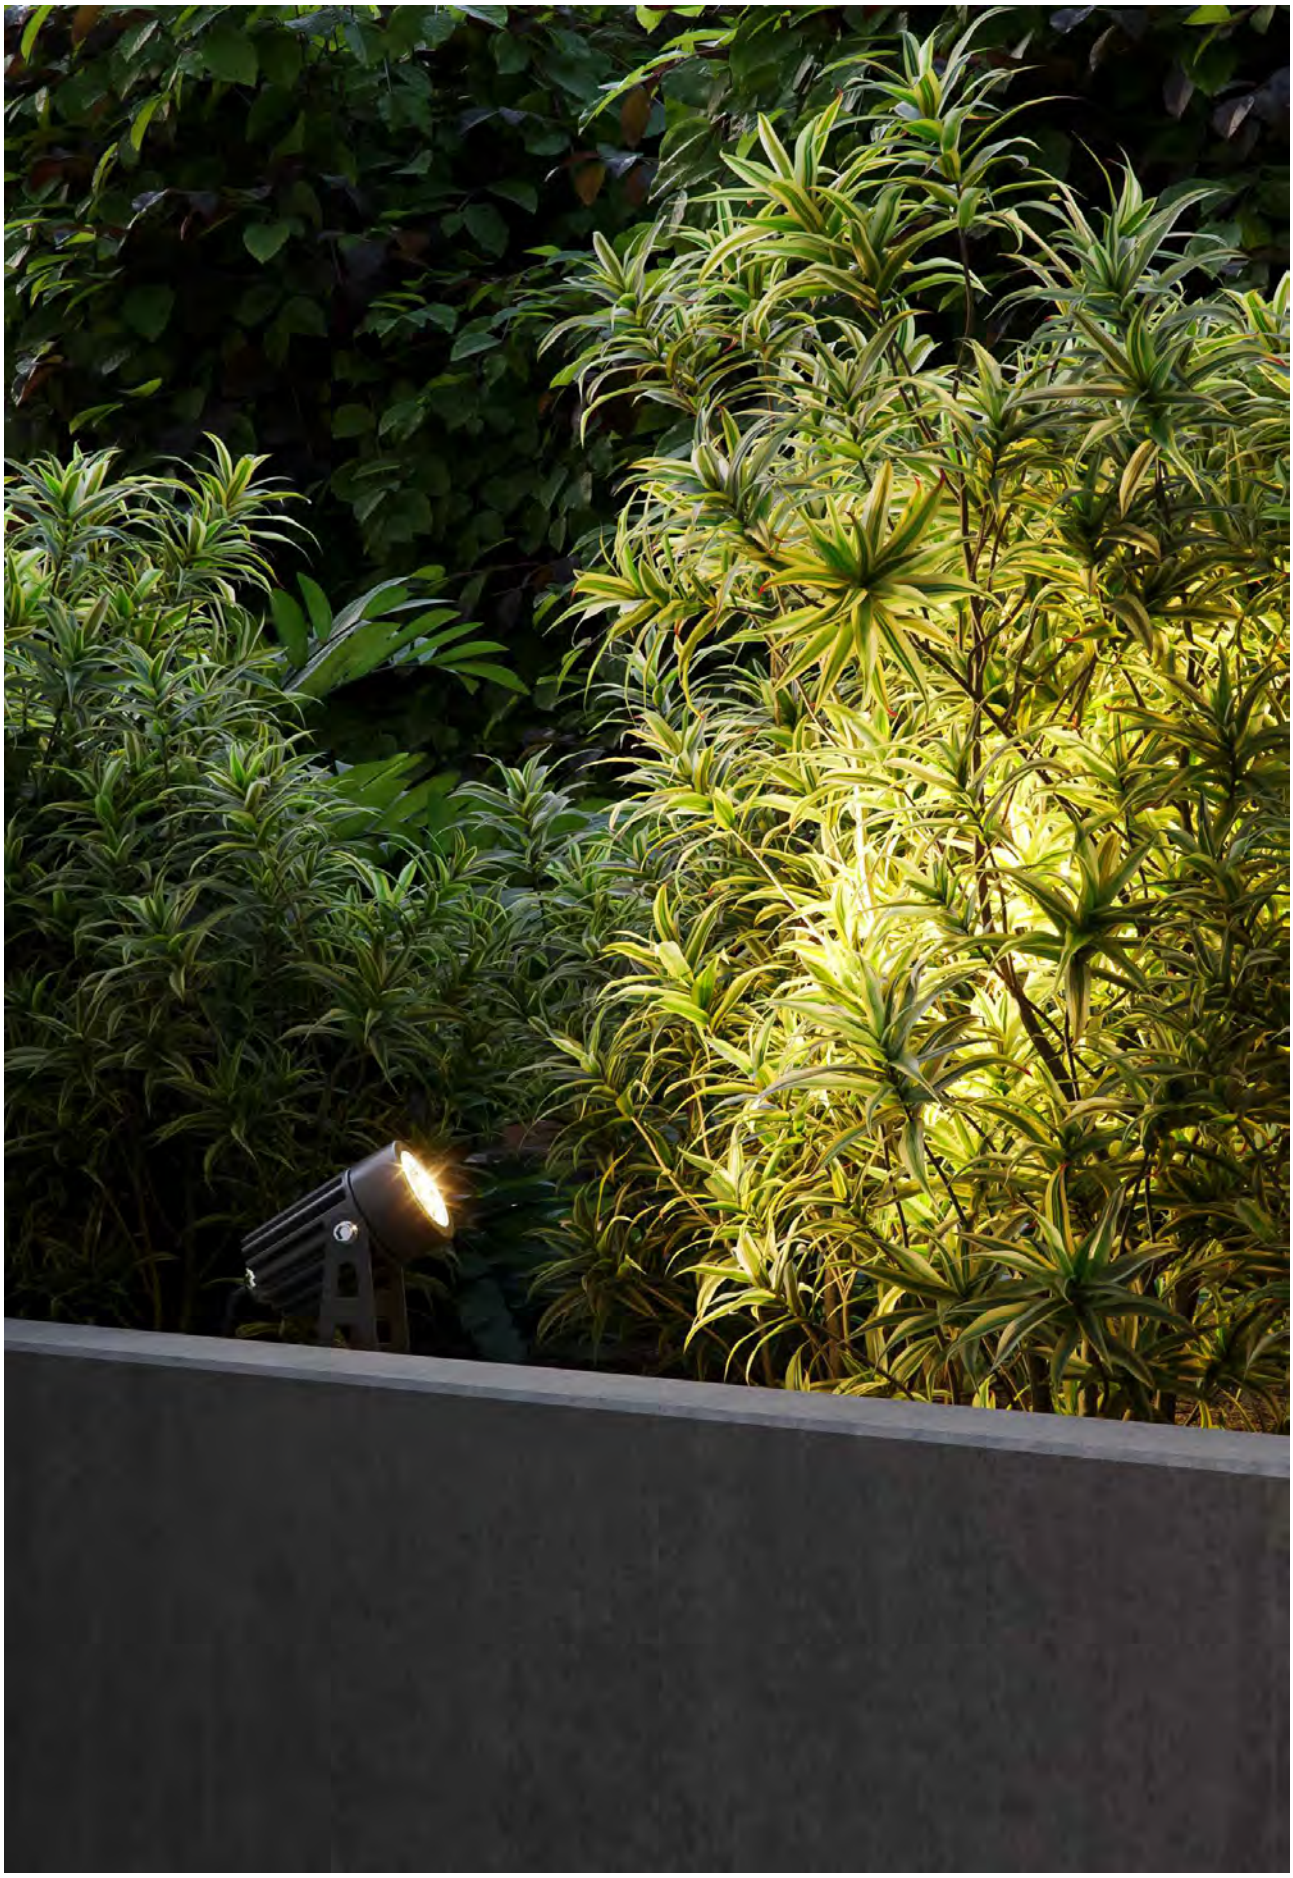


## Zas round






## Zas square






## Technical Information

| | Zas round | Zas square |
|---|---|---|
| Power | 3W | 7W |
| Installation | Floor | Floor |
| Color Temperature | 3.000K | 3.000K |
| Lumens | 240 lm | 450 lm |
| Material | Aluminium | Aluminium |
| Finishes | Black / Corten | White / Black / Corten |

| Code | Zas round | Zas square |
|---|---|---|
| | 4134 | 4690 |
| | 4922 | 4692 |
| | | 4693 |

100/277 VAC | 20.000 HOURS | PF >0,6 | 30° | IK05

220/240 VAC | 30.000 HOURS | PF >0,9 | 40° | IK08

CE RoHS EMC


*Spike included.

3 YEARS WARRANTY | IP 65 | CRI ≥80 | CABLE 24CM | 50/60 Hz | +40°C -20°C | 1/50



## Sky with spike






## Technical Information

| | |
|---|---|
| Power | 10W |
| Installation | Floor |
| Color Temperature | 3.000K / GREEN |
| Lumens | 1.000 lm / 820 lm |
| Material | Aluminium |
| Finishes | Corten |

| Code | | | |
|---|---|---|---|
| | | 3.000K | 4340 |
| | | GREEN | 4341 |

CE RoHS


*Spike included.

5 YEARS WARRANTY | 50.000 HOURS | | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >1KV | 1/32




## Sky switch 10W






## Sky switch 20W






## Technical Information

| | | |
|---|---|---|
| Power | 10W | 20W |
| Installation | Surface | Surface |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 1.200 lm | 2.400 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Gray | White / Black / Gray |

| Code | | |
|---|---|---|
| | ☐ 4679 | ☐ 4682 |
| | ■ 4680 | ■ 4683 |
| | ■ 4681 | ■ 4684 |
| | 1/32 | 1/24 |

## Accessories




Optional spike
4027 ■

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | CCT SWITCH | >1KV


## Sky switch 30W






## Sky switch 40W






## Technical Information

| | Sky switch 30W | Sky switch 40W |
|---|---|---|
| Power | 30W | 40W |
| Installation | Surface | Surface |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 3.600 lm | 4.800 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Gray | White / Black / Gray |


| Code | | |
|---|---|---|
| | ☐ 4685 | ☐ 4688 |
| | ■ 4686 | ■ 4689 |
| | ■ 4687 | ■ 4694 |
| | 1/24 | 1/12 |

## Accessories

Optional spike
4027 ■


CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | CCT SWITCH | >1KV

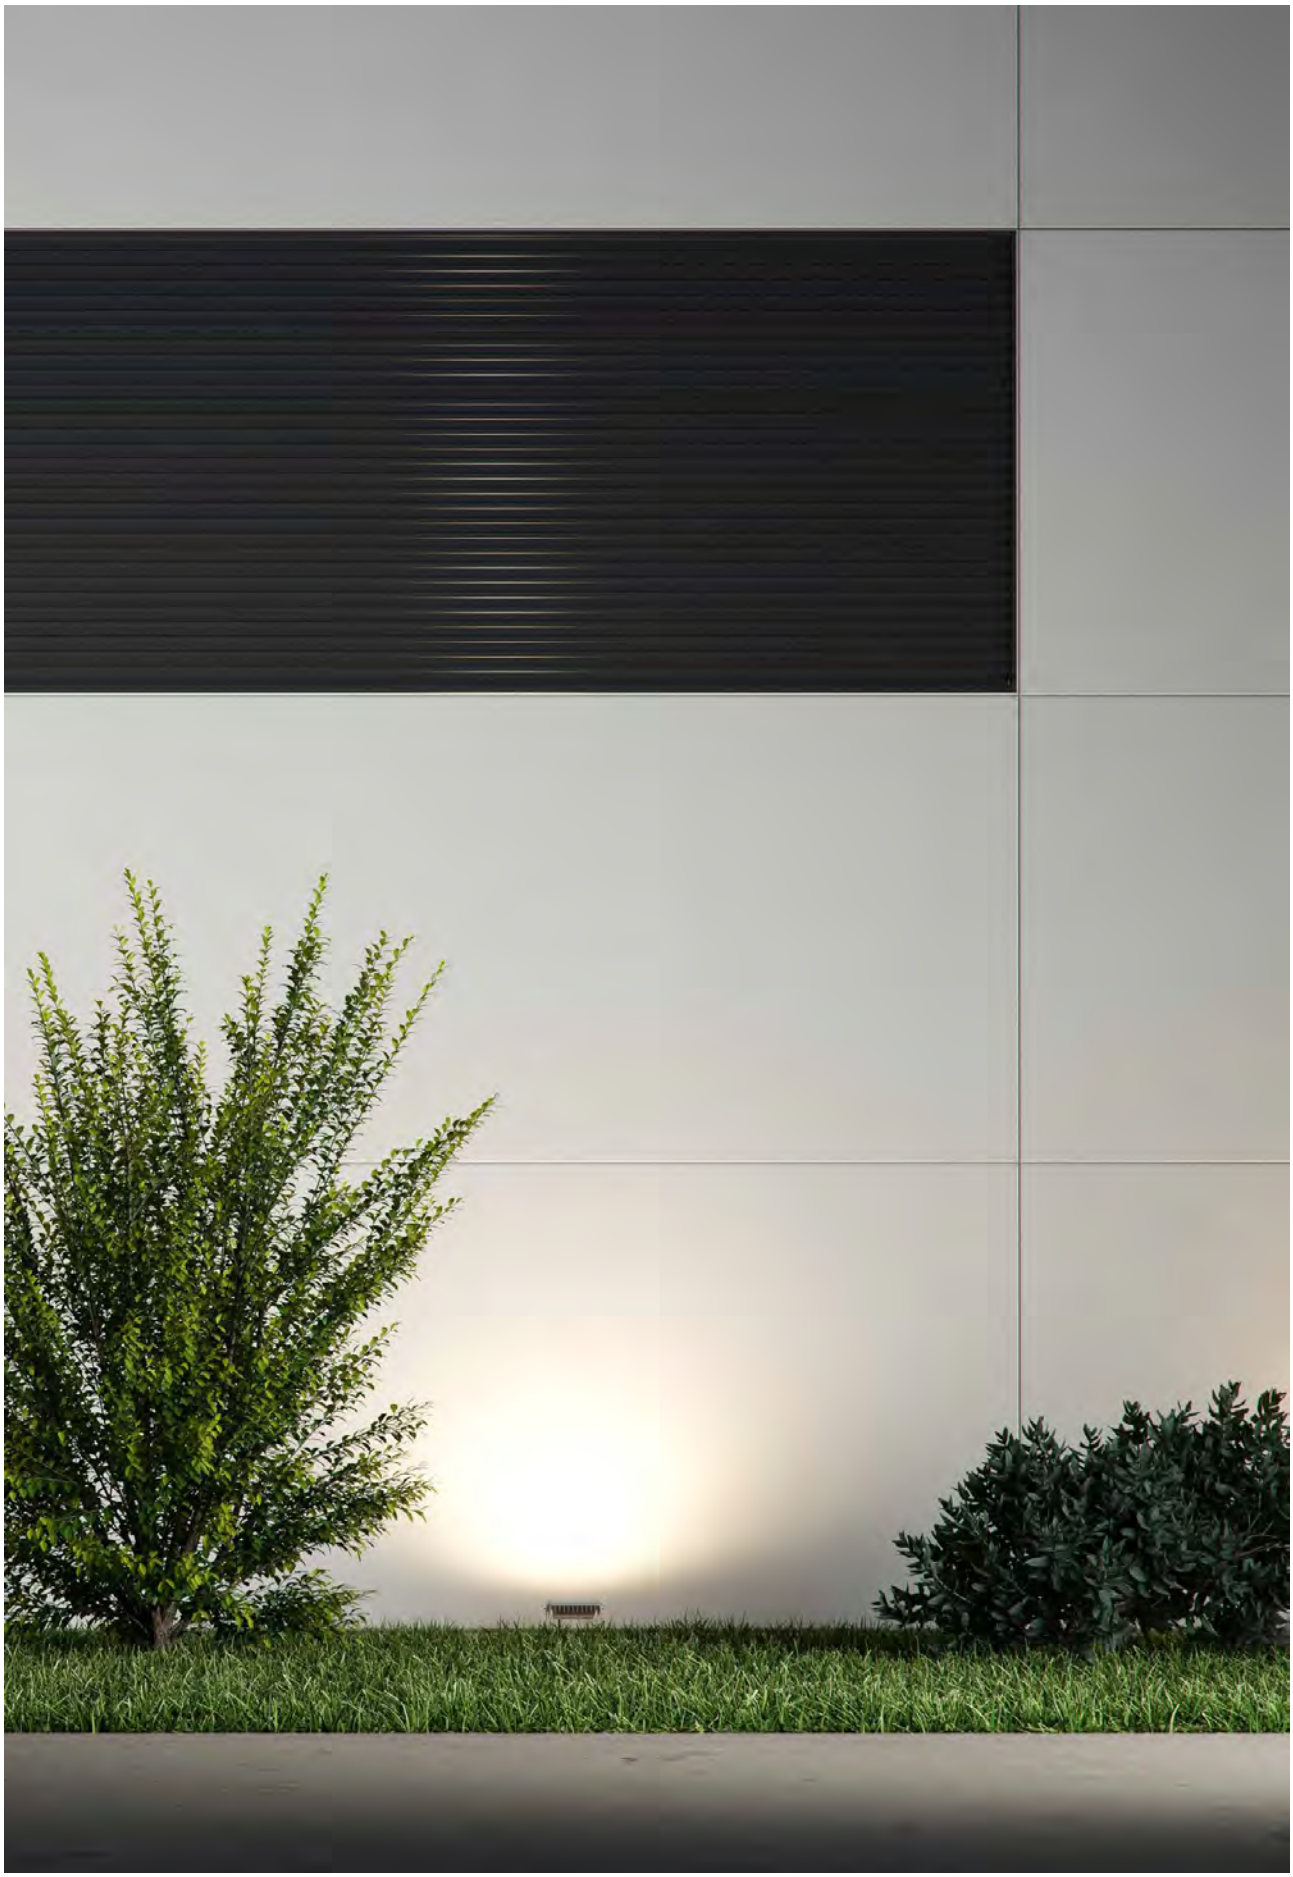


## Sky microwave sensor 10W







## Sky microwave sensor 30W






## Sky microwave sensor 50W






### Technical Information

| | | | |
|---|---|---|---|
| Power | 10W | 30W | 50W |
| Installation | Surface | Surface | Surface |
| Color Temperature | 4.000K / 5.000K | 4.000K / 5.000K | 4.000K / 5.000K |
| Lumens | 1.150 lm / 1.200 lm | 3.550 lm / 3.600 lm | 5.950 lm / 6.000 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |

| Code | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | ☐ | 4.000K | 4349 | ☐ | 4.000K | 4352 | ☐ | 4.000K | 4354 |
| | ☐ | 5.000K | 4350 | ☐ | 5.000K | 4353 | ☐ | 5.000K | 4355 |
| | ■ | 4.000K | 4308 | ■ | 4.000K | 4309 | ■ | 4.000K | 4311 |
| | ■ | 5.000K | 4351 | ■ | 5.000K | 4310 | ■ | 5.000K | 4356 |
| | | | 1/32 | | | 1/24 | | | 1/12 |

### Accessories



Optional spike
4027 ■


CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | MICROWAVE SENSOR | 5 sec 5 min | 1m 7m | ON OFF | >1KV




## Sky 10W







## Sky 20W






## Sky 30W






### Technical Information

| | | | |
|---|---|---|---|
| Power | 10W | 20W | 30W |
| Installation | Surface | Surface | Surface |
| Color Temperature | 5.000K | 2.700K / 4.000K / 5.000K | 2.700K / 4.000K / 5.000K |
| Lumens | 1.150 lm | 2.250 lm / 2.400 lm / 2.450 lm | 3.450 lm / 3.600 lm / 3.650 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | Black / Corten | Gray / Corten |

| Code | | | |
|---|---|---|---|
| | 5.000K | 4254 | |
| | 5.000K | 4257 | |
| | 5.000K | 4266 | |
| | 2.700K | 4401 | |
| | 4.000K | 4402 | |
| | 3.000K | 4276 | |
| | 2.700K | 4279 | |
| | 4.000K | 4280 | |

1/36 | 1/32 | 1/24

### Accessories



Optional spike
4027

CE RoHS


5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >1KV


| Sky 100W | Sky 150W | Sky 200W |
|---|---|---|











## Technical Information

| | | | |
|---|---|---|---|
| Power | 100W | 150W | 200W |
| Installation | Surface | Surface | Surface |
| Color Temperature | 2.200K | 2.200K | 2.200K |
| Lumens | 7.000 lm | 11.000 lm | 14.000 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | Black | Black | Black |
| Code | ■ 3955 | ■ 3956 | ■ 3957 |
| | 1/4 | 1/2 | 1/2 |

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >2KV




Club Tennis Olesa, Olesa de Montserrat, Design: Padel 10. (Spain).


| Polaris 100W | Polaris 150W | Polaris 200W |
|---|---|---|











## Technical Information

| | | | |
|---|---|---|---|
| Power | 100W | 150W | 200W |
| Installation | Surface | Surface | Surface |
| Color Temperature | 3.000K / 4.000K / 5.000K | 3.000K / 4.000K / 5.000K | 3.000K / 4.000K / 5.000K |
| Lumens | 12.700 lm / 13.000 lm / 13.200 lm | 19.200 lm / 19.500 lm / 19.700 lm | 25.700 lm / 26.000 lm / 26.200 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | Black | Black | Black |

| Code | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | ■ | 3.000K | 4513 | ■ | 3.000K | 4516 | ■ | 3.000K | 4519 |
| | ■ | 4.000K | 4514 | ■ | 4.000K | 4517 | ■ | 4.000K | 4520 |
| | ■ | 5.000K | 4515 | ■ | 5.000K | 4518 | ■ | 5.000K | 4521 |
| | | | 1/4 | | | 1/3 | | | 1/3 |


CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >6KV



## Krion 300W







| 5m | 10m | 15m | 20m |
|---|---|---|---|
| 380 lx | 100 lx | 45 lx | 25 lx |

## Krion 400W






| 5m | 10m | 15m | 20m |
|---|---|---|---|
| 470 lx | 120 lx | 55 lx | 30 lx |

## Technical Information

| | Krion 300W | Krion 400W |
|---|---|---|
| Power | 300W | 400W |
| Installation | Surface | Surface |
| Color Temperature | 4.000K / 5.000K | 4.000K / 5.000K |
| Lumens | 39.000 lm / 39.300 lm | 52.000 lm / 52.300 lm |
| Material | Aluminium | Aluminium |
| Finishes | Black | Black |

| Code | | | | | |
|---|---|---|---|---|---|
| | ■ | 4.000K | 4509 | ■ 4.000K | 4510 |
| | ■ | 5.000K | 4511 | ■ 5.000K | 4512 |


CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/277 VAC | PF >0,9 | CRI ≥80 | 80°x140° | 50/60 Hz | IK10 | +45°C -25°C | AKZO NOBEL | >6KV | 1




## Wech








## Technical Information

| | |
|---|---|
| Power | 10W |
| Installation | Portable |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 600 lm |
| Material | Aluminium & Polycarbonate |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5004 |
| | ■ 5005 |

CE RoHS EMC

Clamp, lyre and charger included.

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | POWER BANK | 10 HOURS | 6 HOURS | USB-C 5V | 4.400 mAh | IP 65 | CRI ≥80 | 110° | IK08 | +45°C -10°C | CCT SWITCH | 1/10


▶ VIDEO






New

## Madi



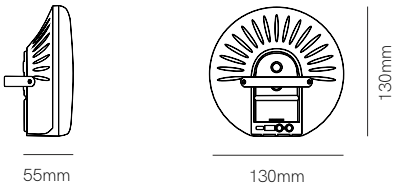



### Technical Information

| | |
|---|---|
| Power | 4W |
| Installation | Portable |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 600 lm |
| Material | Polycarbonate and ABS |
| Finishes | White |

| | |
|---|---|
| Code | ☐ 5154 |

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | POWER BANK | SOS | 3-4 HOURS | 100% 6-7H 50% 12-15H SOS 16-18H | USB-C 5V 2A | 5.200 mAh | IP 54 | CRI ≥80 | 200° | DIMMABLE | IK08 | +40°C -10°C | CCT SWITCH | 1

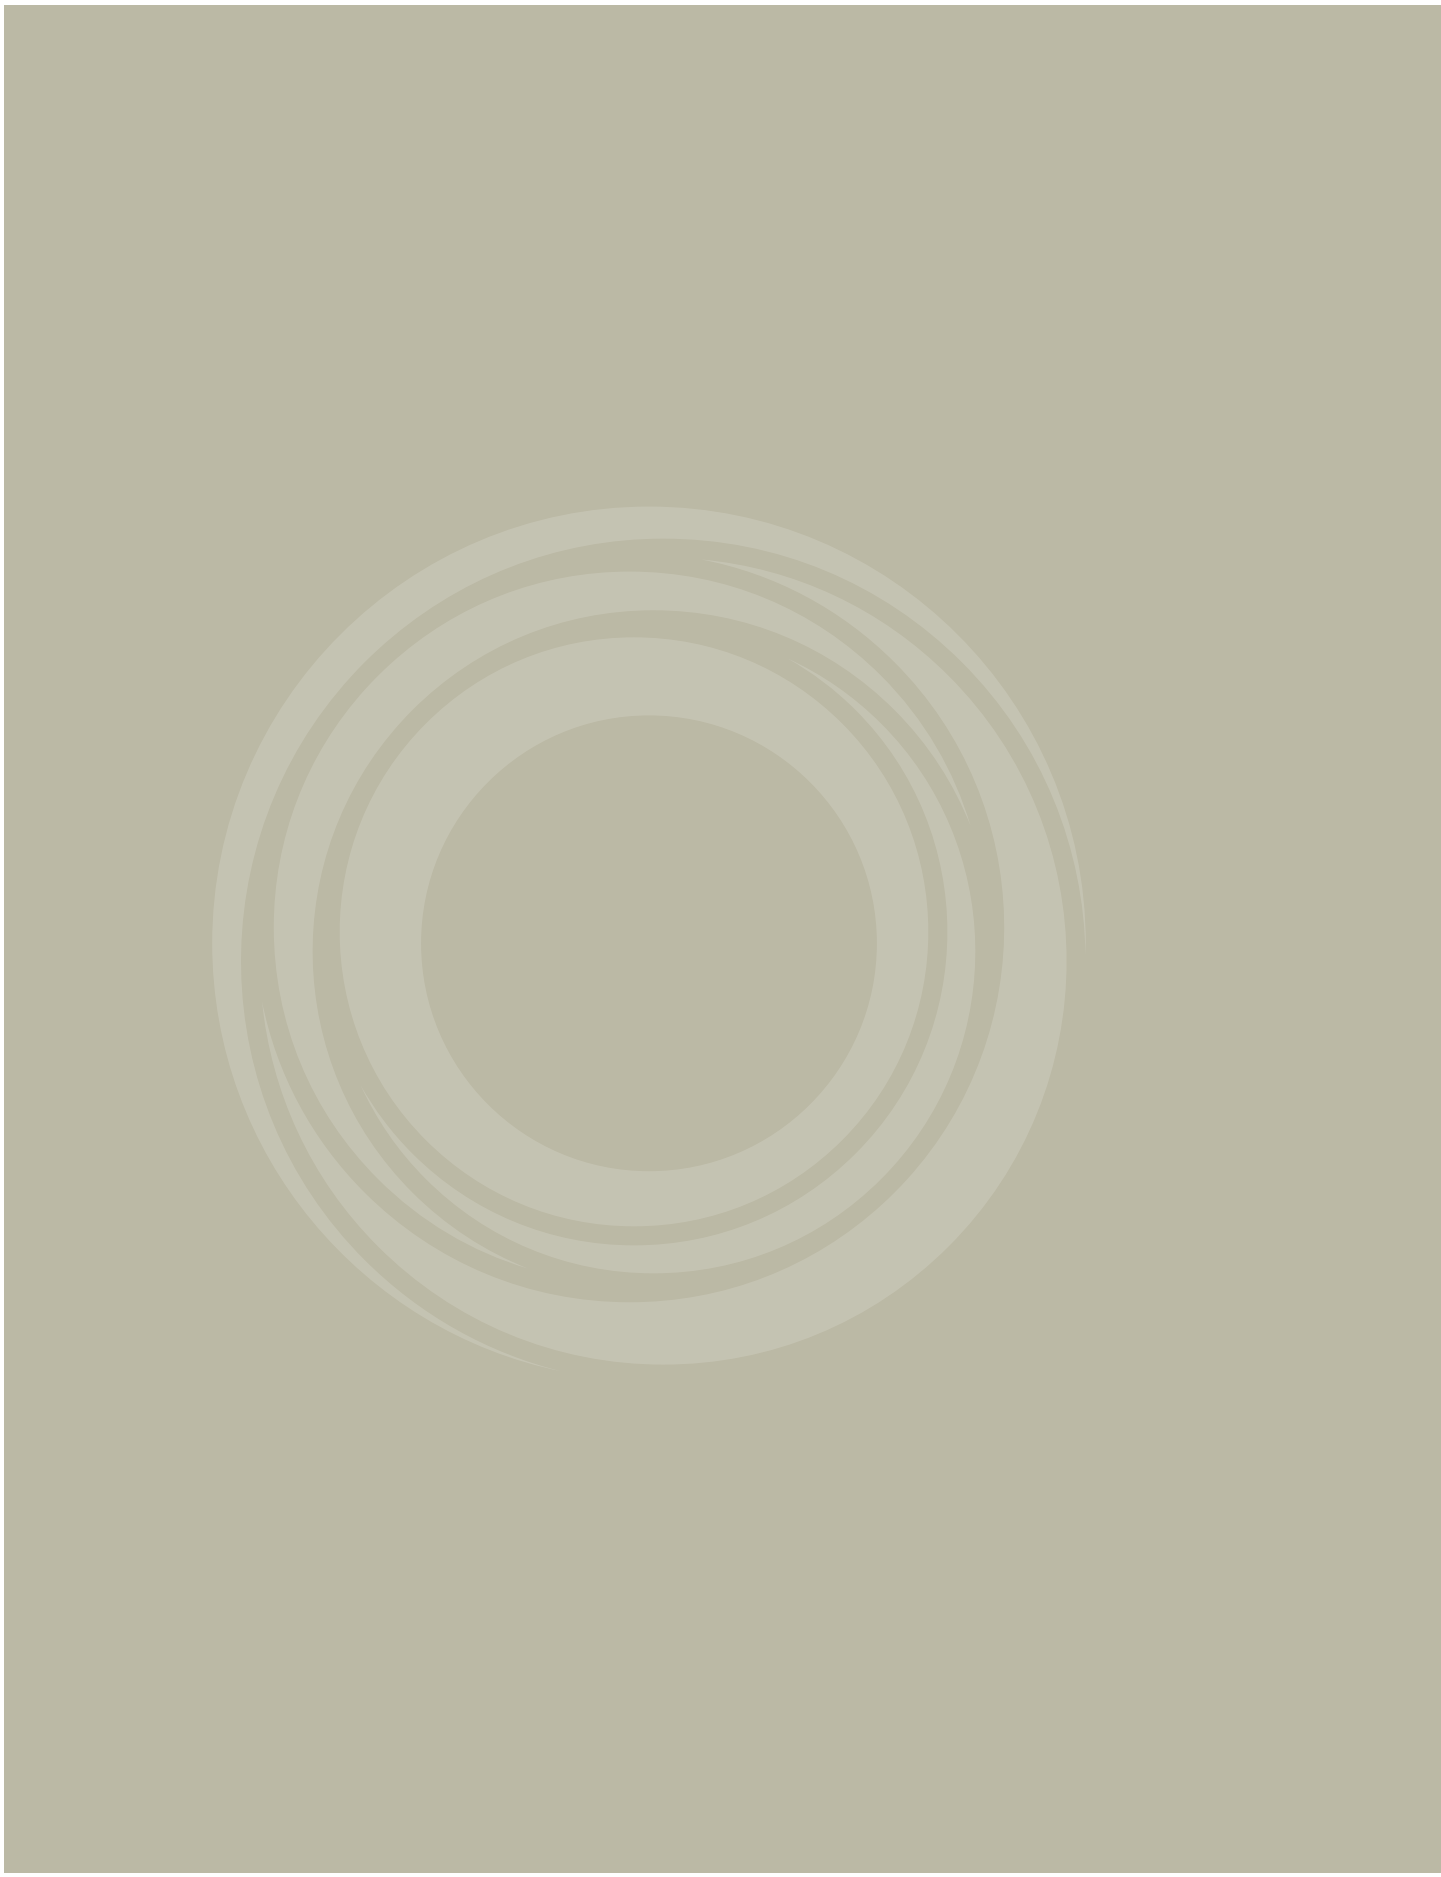


# Solar lighting



New

## Gam






## Technical Information

| | |
|---|---|
| Power | 0,7W |
| Installation | Floor |
| Color Temperature | Switch 2.700K /3.200K / 4.000K |
| Lumens | 85 lm |
| Material | ABS + PMMA |
| Finishes | Black |

| | |
|---|---|
| Code | ■ 5178 |


CE RoHS

3 YEARS WARRANTY BATTERY 2 YEARS | 20.000 HOURS | 6-8 HOURS | 6-8H. | 1.800 mAh | IP 54 | CRI ≥80 | 270° | IK02 | +55°C -10°C | ON OFF | CCT SWITCH | 1/50




## Popa 60






## Popa 100



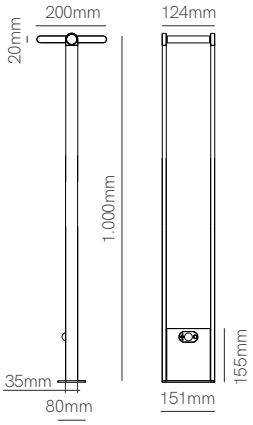


## Technical Information

| | Popa 60 | Popa 100 |
|---|---|---|
| Power | 1,6W | 1,6W |
| Installation | Floor | Floor |
| Color Temperature | 4.000K | 4.000K |
| Lumens | 150 lm | 150 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |


| Code | | |
|---|---|---|
| | ☐ 3882 | ☐ 3884 |
| | ■ 3883 | ■ 3885 |

CE RoHS

3 YEARS WARRANTY BATTERY 2 YEARS | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min | 1/2

## Proa






## Technical Information

| | |
|---|---|
| Power | 1,6W |
| Installation | Surface |
| Color Temperature | 4.000K |
| Lumens | 150 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 3531 |
| | ■ 3532 |

CE RoHS


3 YEARS WARRANTY BATTERY 2 YEARS | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min | 1/6





## Egna






### Technical Information

| | |
|---|---|
| Power | 3W |
| Installation | Surface |
| Color Temperature | 4.000K |
| Lumens | 250 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 3587 |
| | ■ 3592 |


CE RoHS

3 YEARS WARRANTY BATTERY 2 YEARS | 25.000 HOURS | 5-6 HOURS | 11% 20H. 100% 2-3H. | 4.500 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 1/8



## Iris







## Technical Information

| | |
|---|---|
| Power | 2,5W |
| Installation | Surface |
| Color Temperature | 4.000K |
| Lumens | 174 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 3496 |
| | ■ 3497 |


CE RoHS

3 YEARS WARRANTY BATTERY 2 YEARS | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min | 1/6

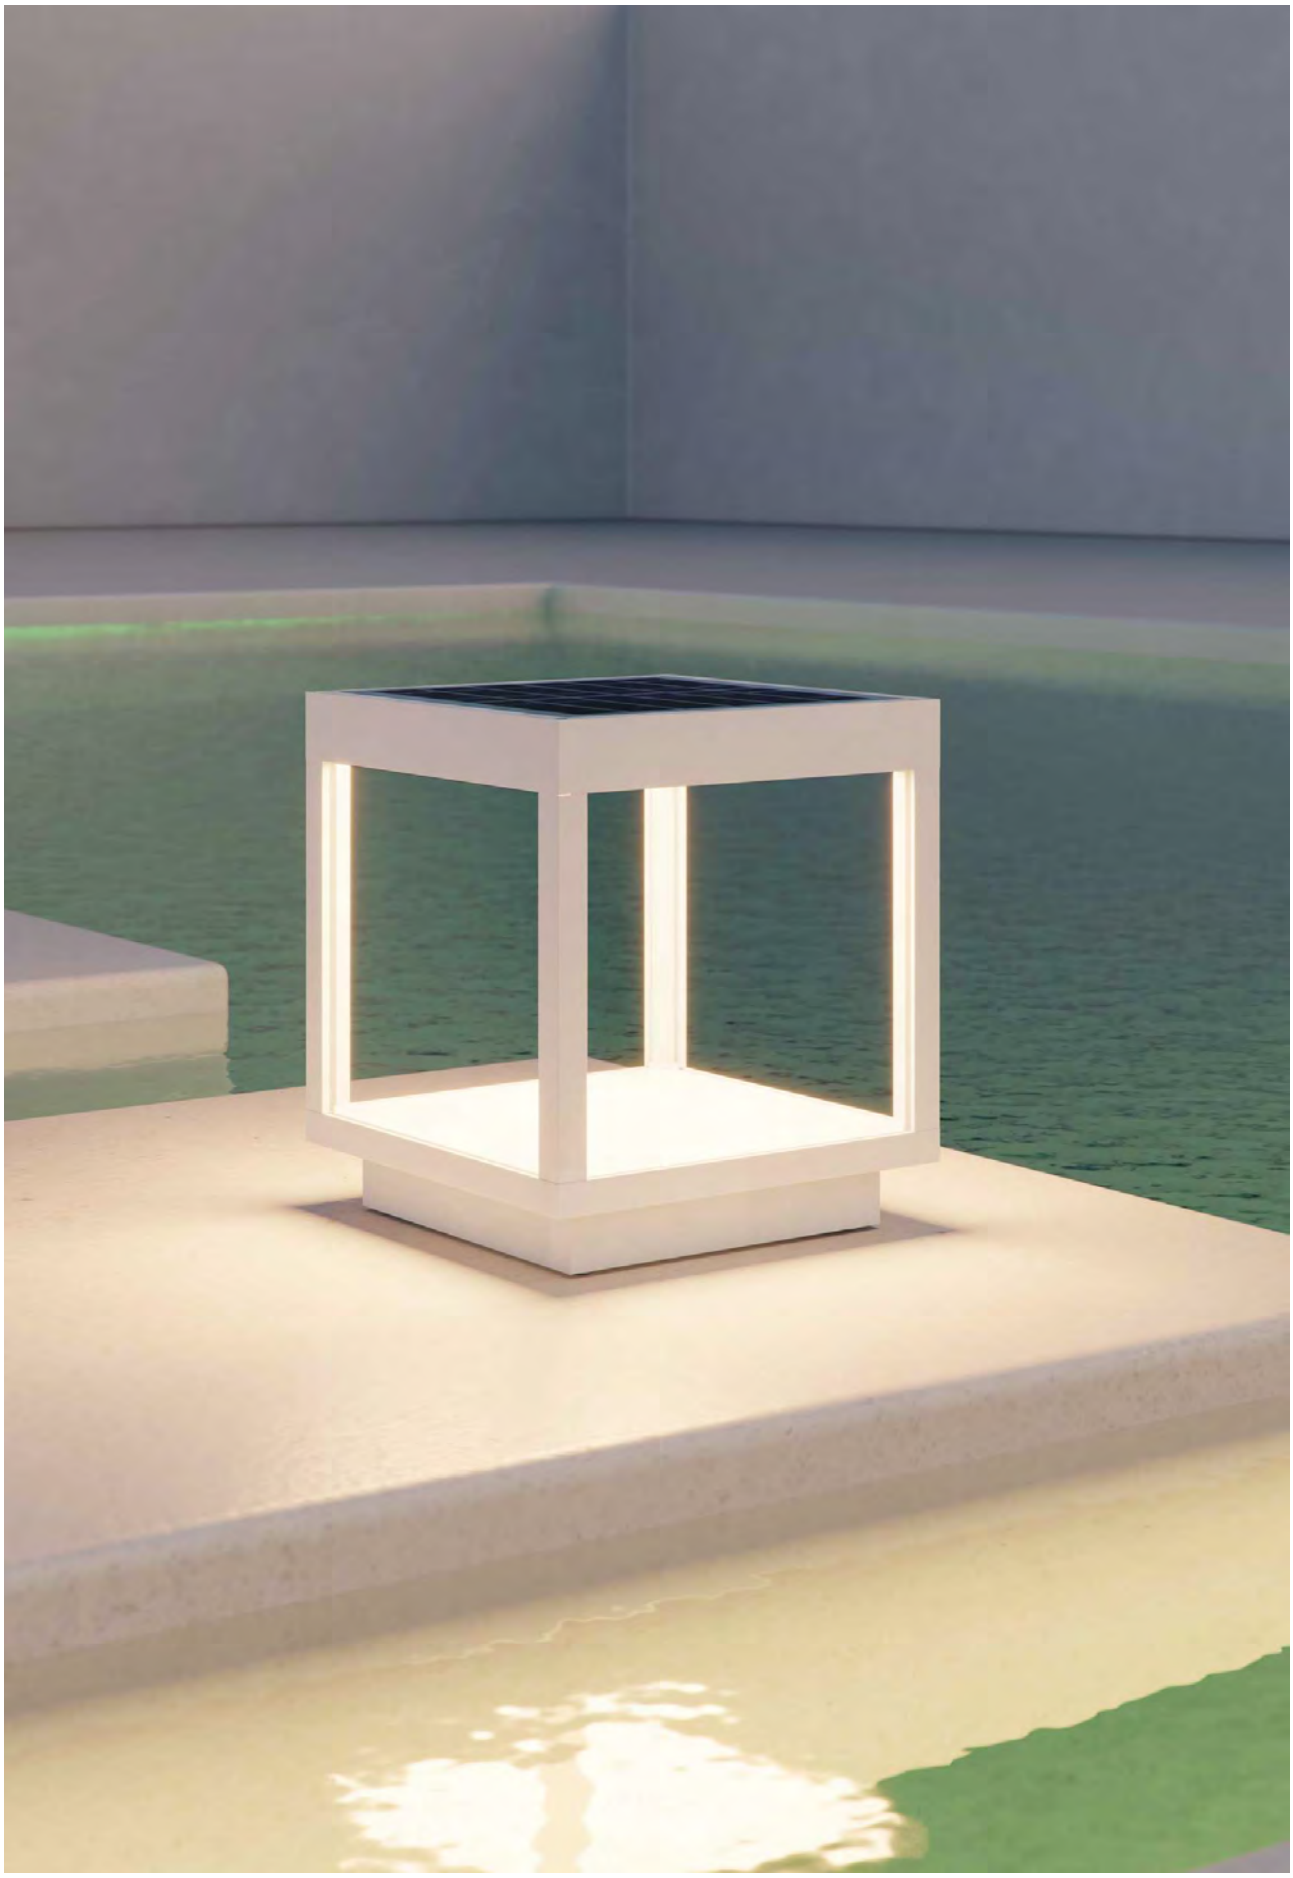

## Visor solar






## Technical Information

| | |
|---|---|
| Power | 3,5W |
| Installation | Portable |
| Color Temperature | 3.000K |
| Lumens | 460 lm |
| Material | Aluminium |
| Finishes | White / Black / Corten |

| Code | |
|---|---|
| | 4209 |
| | 4193 |
| | 4194 |

CE RoHS

3 YEARS WARRANTY BATTERY 2 YEARS | 30.000 HOURS | 10 HOURS | 8 HOURS | 4.500 mAh | IP 65 | CRI ≥80 | 120° | +45°C -25°C | ON OFF | 1/4




# Rings




## Avant round







## Avant square






## Avant surface round






*GU10 Bulbholder included.

## Technical Information

| | | | |
|---|---|---|---|
| Installation | Recessed | Recessed | Surface |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |
| Bulbholder | 111mm GU10 | 111mm GU10 | 111mm GU10 |

| Code | | | |
|---|---|---|---|
| | ☐ 4486 | ☐ 4484 | ☐ 4933 |
| | ■ 4487 | ■ 4485 | ■ 4934 |
| | ⓘ Custom RAL | ⓘ Custom RAL | ⓘ Custom RAL |
| | ⓘ Electrolytic Plating | ⓘ Electrolytic Plating | ⓘ Electrolytic Plating |
| | 1/20 | 1/20 | 1/10 |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20




## One recessed






## One surface






*GU10 Bulbholder included, except 258226C.

## Technical Information

| | | |
|---|---|---|
| Installation | Recessed | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Brushed alumin. | White / Black |
| Bulbholder | 50mm GU10 | 50mm GU10 |

| Code | | |
|---|---|---|
| | ☐ 4478 | ☐ 4480 |
| | ■ 4479 | ■ 4481 |
| | 258226C | ⓘ Custom RAL |
| | ⓘ Custom RAL | ⓘ Electrolytic Plating |
| | ⓘ Electrolytic Plating | |
| | 1/50 | 1/20 |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20




## Zio recessed






## Zio surface






*GU10 Bulbholder included, except 257226C.

## Technical Information

| | Recessed | Surface |
|---|---|---|
| Installation | Recessed | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Brushed alumin. | White / Black |
| Bulbholder | 50mm GU10 | 50mm GU10 |

| Code | | |
|---|---|---|
| | ☐ 4476 | ☐ 4482 |
| | ■ 4477 | ■ 4483 |
| | ■ 257226C | ⓘ Custom RAL |
| | ⓘ Custom RAL | ⓘ Electrolytic Plating |
| | ⓘ Electrolytic Plating | |
| | 1/50 | 1/20 |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20



## Rok






*G5.3 Bulbholder included.

## Technical Information

| | |
|---|---|
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Black / Brushed chrome |
| Bulbholder | 50mm G5.3 |

| Code | |
|---|---|
| | 4755 |
| | 4756 |
| | 4757 |
| ⓘ | Custom RAL |
| ⓘ | Electrolytic Plating |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 65 | 1/50





| | New | New |
|---|---|---|
| Luk round IP20 | Luk round IP65 | Luk square IP65 |











*IP20 includes GU10 Bulbholder, IP65 includes G5.3 Bulbholder.

## Technical Information

| | | | |
|---|---|---|---|
| Installation | Recessed | Recessed | Recessed |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |
| Bulbholder | 50mm GU10 | 50mm GU10 | 50mm GU10 |
| Code | ☐ 4758 | ☐ 5214 | ☐ 5216 |
| | ■ 4759 | ■ 5215 | ■ 5217 |
| | ⓘ Custom RAL | ⓘ Custom RAL | ⓘ Custom RAL |
| | ⓘ Electrolytic Plating | ⓘ Electrolytic Plating | ⓘ Electrolytic Plating |
| | IP 20 | IP 65 | IP 65 |

CE RoHS


ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 1/100



## Bathroom






*G5.3 Bulbholder included.

## Technical Information

| | |
|---|---|
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Brushed aluminium |
| Bulbholder | 50mm G5.3 |

| Code | |
|---|---|
| | ☐ 223232 |
| | ▒ 223233 |


CE RoHS

3 YEARS WARRANTY | IP 44 | 1/50



## Eclipse






*G5.3 Bulbholder included.

## Technical Information

| | |
|---|---|
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Gray / Brushed chrome |
| Bulbholder | 50mm G5.3 |

| Code | |
|---|---|
| | ☐ 222232 |
| | ☐ 222230 |
| | ☐ 222238 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Bulbholder GU10
301182 ☐


CE RoHS

3 YEARS WARRANTY | IP 20 | 1/50



## Basculante






*G5.3 Bulbholder included.

## Technical Information

| | |
|---|---|
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Gray / Brushed chrome |
| Bulbholder | 50mm G5.3 |

| Code | |
|---|---|
| | ☐ 205280 |
| | ☐ 205284 |
| | ☐ 205285 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.


## Accessories



Bulbholder GU10
301182 ☐


CE RoHS

3 YEARS WARRANTY | IP 20 | 1/50

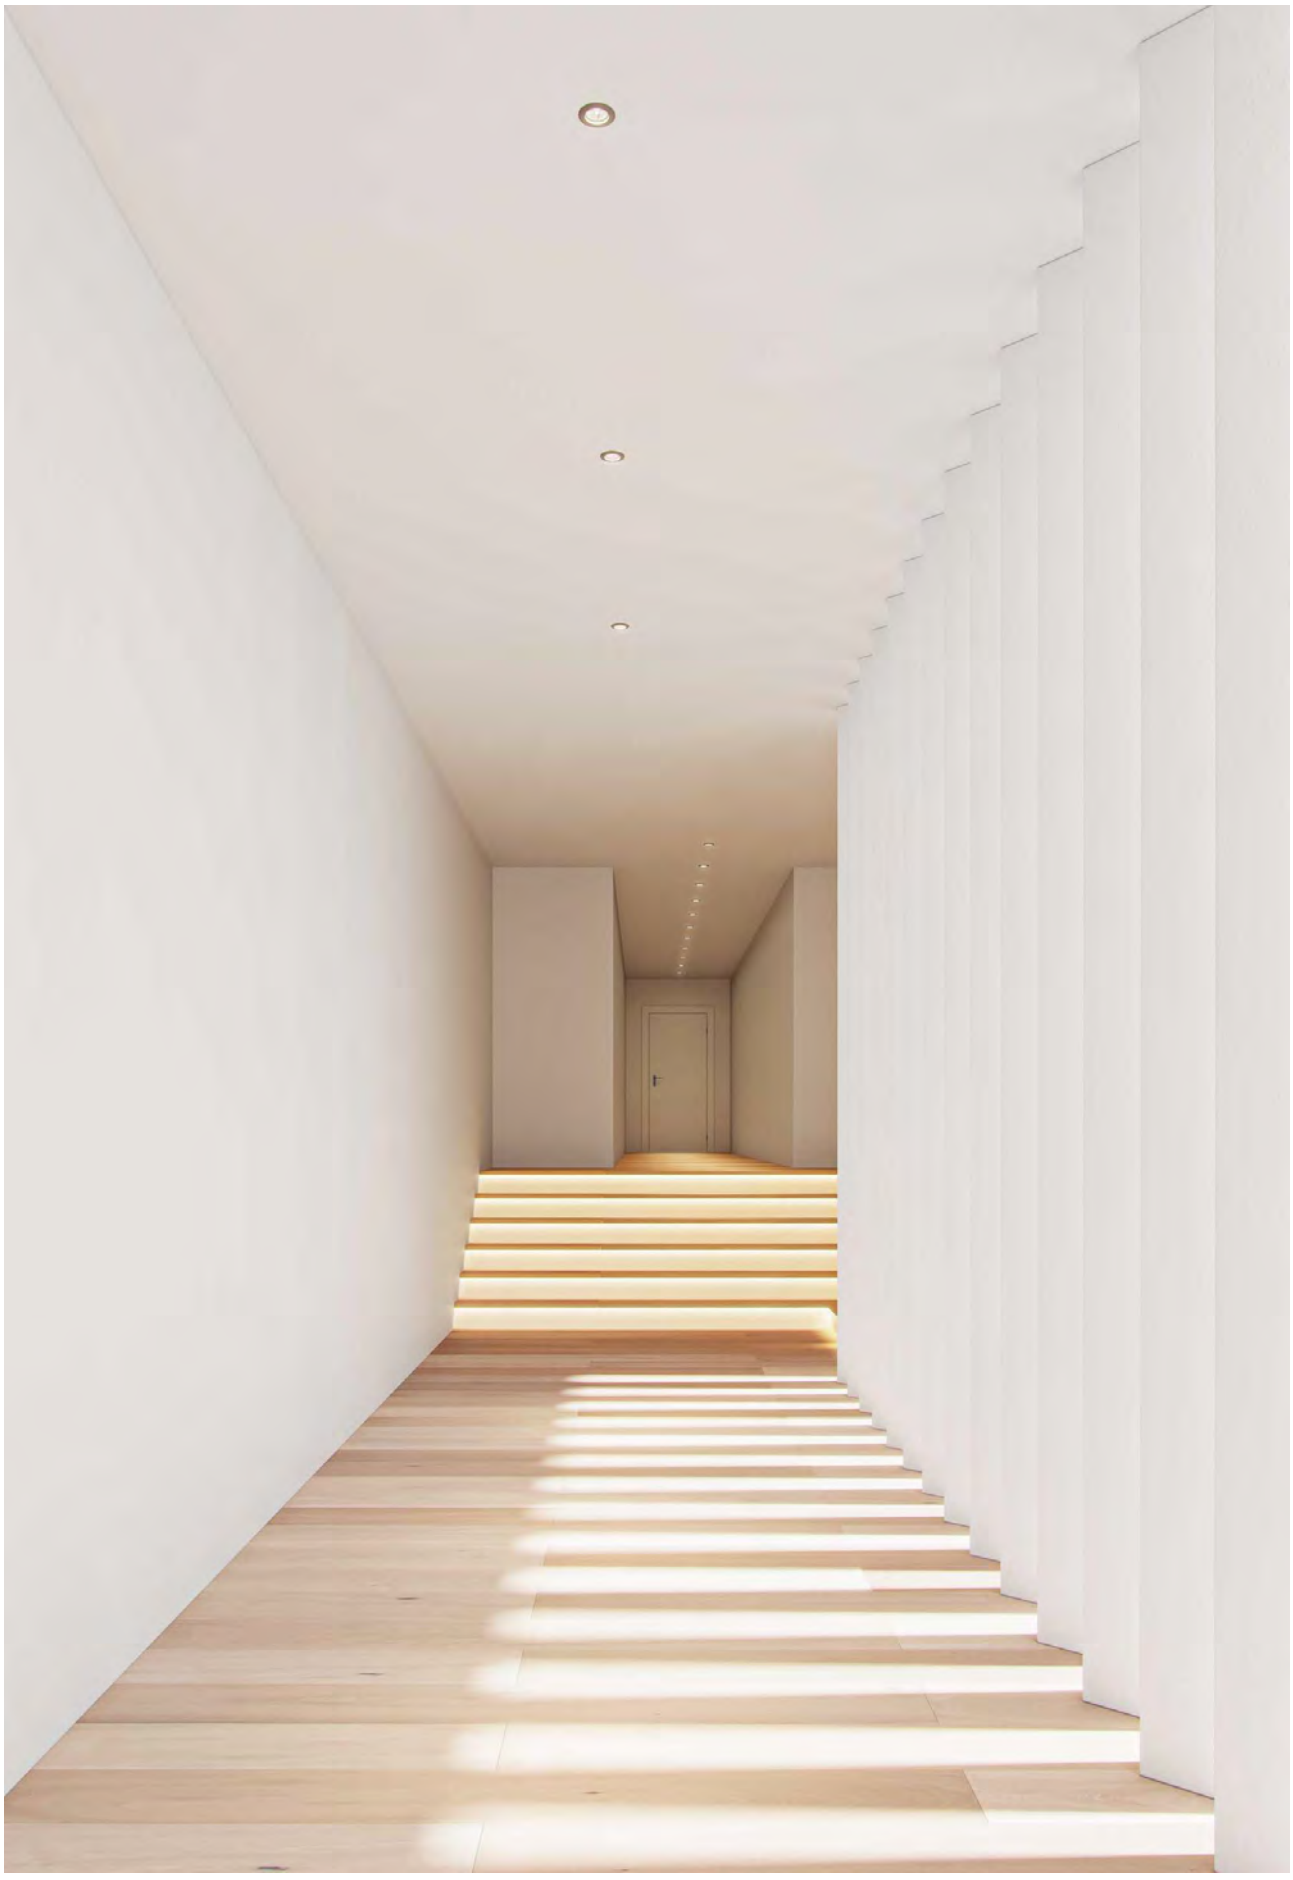

## Fijo






*G5.3 Bulbholder included.

### Technical Information

| | |
|---|---|
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Gray / Brushed chrome |
| Bulbholder | 50mm G5.3 |

| Code | |
|---|---|
| | ☐ 206280 |
| | ▩ 206284 |
| | ▩ 206285 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

### Accessories



Bulbholder GU10
301182 ▩

CE RoHS

3 YEARS WARRANTY | IP 20 | 1/50




# Retrofit



New


## AR111 15° G53






## AR111 15° GU10






### Technical Information

| | | |
|---|---|---|
| Power | 15W | 15W |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 1.350 lm / 1.400 lm / 1.500 lm | 1.350 lm / 1.400 lm / 1.500 lm |

| | | | | |
|---|---|---|---|---|
| Code | 2.700K | 5187 | 2.700K | 5190 |
| | 3.000K | 5188 | 3.000K | 5191 |
| | 4.000K | 5189 | 4.000K | 5192 |
| | PF >0,5 \| 12V AC/DC | | PF >0,9 \| 220/240 VAC | |


CE RoHS EMC


3 YEARS WARRANTY | 15.000 HOURS | IP 20 | CRI ≥80 | 15° | 50/60 Hz | +40°C -20°C | 10/30

| Nitro GU10 | Dole GU10 |
|---|---|








## Technical Information


| | | |
|---|---|---|
| Power | 15W | 15W |
| Color Temperature | 2.700K | 2.700K / 3.000K / 4.000K |
| Lumens | 1.000 lm | 1.050 lm / 1.100 lm / 1.120 lm |

| | | | |
|---|---|---|---|
| Code | 3470 | 2.700K | 3467 |
| | | 3.000K | 3468 |
| | | 4.000K | 3469 |


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -20°C | 10/30

| Lynk G53 | Lynk GU10 | Lynk GU10 dimmable |
|---|---|---|



















## Technical Information


| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Power | 13W | | 13W | | | 13W | | |
| Color Temperature | 2.700K / 3.000K / 4.000K | | 2.700K / 3.000K / 4.000K | | | 2.700K / 3.000K / 4.000K | | |
| Lumens | 880 lm / 900 lm / 950 lm | | 880 lm / 900 lm / 950 lm | | | 880 lm / 900 lm / 950 lm | | |
| Code | 2.700K | 3452 | 2.700K | 3455 | | 2.700K | 3464 | |
| | 3.000K | 3453 | 3.000K | 3456 | | 3.000K | 3465 | |
| | 4.000K | 3454 | 4.000K | 3457 | | 4.000K | 3466 | |
| | 12V AC/DC | | 220/240 VAC | | | 220/240 VAC | TRIAC DIMM | |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -20°C | 10/30

## Max BA15d






### Technical Information

| | |
|---|---|
| Power | 7W |
| Color Temperature | 2.700K |
| Lumens | 500 lm |

| | |
|---|---|
| Code | 3569 |

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 24° | 50/60 Hz | +40°C -20°C | 6/30


| Power MR16 | Power GU10 | Power GU10 dimmable |
|---|---|---|













## Technical Information

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Power | 12W | | | 10W / 12W | | | 12W | |
| Color Temperature | 2.700K / 3.000K / 4.000K | | | 2.700K / 3.000K / 4.000K | | | 2.700K / 3.000K / 4.000K | |
| Lumens | 900 lm / 950 lm / 1.000 lm | | | 950 lm / 1.000 lm / 1.050 lm | | | 950 lm / 1.000 lm / 1.050 lm | |
| Code | 2.700K | 3441 | | 12W 2.700K | 3438 | | 2.700K | 3489 |
| | 3.000K | 3442 | | 10W 3.000K | 4295 | | 3.000K | 3490 |
| | 4.000K | 3443 | | 10W 4.000K | 4296 | | 4.000K | 3491 |
| | | | 12V AC/DC | | | 220/240 VAC | | 220/240 VAC \| TRIAC DIMM |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

| System MR16 | System GU10 | System GU10 dimmable |
|---|---|---|



















## Technical Information

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Power | 8W | | 8W | | | 8W | | |
| Color Temperature | 2.700K / 3.000K / 4.000K | | 2.700K / 3.000K / 4.000K | | | 2.700K / 3.000K / 4.000K | | |
| Lumens | 725 lm / 780 lm / 825 lm | | 725 lm / 780 lm / 825 lm | | | 660 lm / 700 lm / 750 lm | | |
| Code | 2.700K | 3435-N | 2.700K | 3432-N | | 2.700K | 3492-N | |
| | 3.000K | 3436-N | 3.000K | 3433-N | | 3.000K | 3493-N | |
| | 4.000K | 3437-N | 4.000K | 3434-N | | 4.000K | 3494-N | |
| | 12V AC/DC | | 220/240 VAC | | | 220/240 VAC | TRIAC DIMM | |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50


| Hook GU10 | Hook GU10 dimmable |
|---|---|













## Technical Information

| | | | | |
|---|---|---|---|---|
| Power | 6W | | 6W | |
| Color Temperature | 2.700K / 3.000K / 4.000K | | 2.700K / 3.000K / 4.000K | |
| Lumens | 570 lm / 594 lm / 616 lm | | 570 lm / 594 lm / 616 lm | |
| Code | 2.700K | 4023 | 2.700K | 3654-N |
| | 3.000K | 4024 | 3.000K | 3655-N |
| | 4.000K | 4025 | 4.000K | 3656-N |

TRIAC DIMM

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50


| Uniform-line MR16 | Uniform-line GU10 | Uniform-line GU10 dimmable |
|---|---|---|













## Technical Information

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 6W | | 6W | | 6W | | |
| Color Temperature | 2.700K/3.000K/4.000K/5.000K | | 2.700K/3.000K/4.000K/5.000K | | 2.700K / 3.000K / 4.000K | | |
| Lumens | 480 lm/510 lm/545 lm/560 lm | | 480 lm/510 lm/545 lm/560 lm | | 490 lm / 500 lm / 530 lm | | |
| Code | 2.700K | 4019-V2 | 2.700K | 4015-V2 | 2.700K | 4227 | |
| | 3.000K | 4020-V2 | 3.000K | 4016-V2 | 3.000K | 4228 | |
| | 4.000K | 4021-V2 | 4.000K | 4017-V2 | 4.000K | 4229 | |
| | 5.000K | 4022-V2 | 5.000K | 4018-V2 | | | |
| | 12V AC/DC | | 220/240 VAC | | 220/240 VAC | TRIAC DIMM | |


CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/50

## Narrow GU10 dimmable








## Technical Information

| | |
|---|---|
| Power | 7W |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 400 lm / 420 lm |

| | | |
|---|---|---|
| Code | 2.700K | 4672 |
| | 3.000K | 4671 |


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 15° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | 10/50

## Tutto MR11









## Tutto GU10








## Technical Information

| | | |
|---|---|---|
| Power | 4W | 4W |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 240 lm / 250 lm / 260 lm | 285 lm / 300 lm / 315 lm |


| | | | | |
|---|---|---|---|---|
| Code | 2.700K | 3447 | 2.700K | 3444 |
| | 3.000K | 3448 | 3.000K | 3445 |
| | 4.000K | 3449 | 4.000K | 3446 |
| | 12V AC/DC | | 220/240 VAC | |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

## Adn G4






### Technical Information

| | |
|---|---|
| Power | 2,5W |
| Color Temperature | 3.000K |
| Lumens | 198 lm |


| | |
|---|---|
| Code | 130L006 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,6 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


## Uniform-line G4






## Uniform-line long G4






### Technical Information

| | | |
|---|---|---|
| Power | 1,3W | 1,6W |
| Color Temperature | 3.000K / 5.000K | 3.000K / 5.000K |
| Lumens | 150 lm / 158 lm | 203 lm / 223 lm |


| | | | | |
|---|---|---|---|---|
| Code | 3.000K | 130L006-2 | 3.000K | 130L195-C |
| | 5.000K | 130L006-2F | 5.000K | 130L195-D |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


## Uniform-line G9






## Uniform-line long G9






## Technical Information

| | | |
|---|---|---|
| Power | 2,5W | 2,8W |
| Color Temperature | 3.000K / 5.000K | 3.000K / 5.000K |
| Lumens | 242 lm / 250 lm | 308 lm / 314 lm |

| | | | | |
|---|---|---|---|---|
| Code | 3.000K | 130L184-5 | 3.000K | 130L195-A |
| | 5.000K | 130L184-5F | 5.000K | 130L195-B |


CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

| Shop E14 | Prisma E14 |
|---|---|











## Technical Information


| | | |
|---|---|---|
| Power | 2W | 4W |
| Color Temperature | 3.000K | 3.000K |
| Lumens | 180 lm | 340 lm |
| Code | 3450 | 3474-M |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | PF >0,3 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

## Pl T40 E27






### Technical Information

| | |
|---|---|
| Power | 10W |
| Color Temperature | 3.000K / 4.000K |
| Lumens | 825 lm / 880 lm |


| | | |
|---|---|---|
| Code | 3.000K | 582L016T40E-C3 |
| | 4.000K | 582L016T40E-F |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


## Cala 9W G24



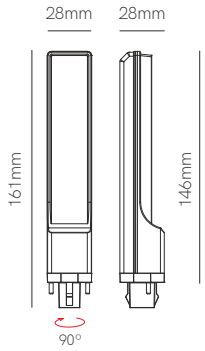


## Cala 10W G24



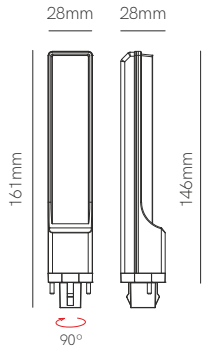


## Technical Information

| | | |
|---|---|---|
| Power | 9W | 10W |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 880 lm / 935 lm | 1.100 lm / 1.155 lm |


| | | | | |
|---|---|---|---|---|
| Code | 3.000K | 582L015-C3 | 3.000K | 582L015-C3B |
| | 4.000K | 582L015-F4 | 4.000K | 582L015-F4B |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 135° | 50/60 Hz | +40°C -20°C | 10/50


## HQI tubular RX7S







## HQI tubular G12






## HQI tubular E27






## Technical Information

| | HQI tubular RX7S | HQI tubular G12 | HQI tubular E27 |
|---|---|---|---|
| Power | 13W | 10W | 10W |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 1.320 lm / 1.375 lm | 1.000 lm / 1.030 lm | 1.000 lm / 1.030 lm |
| Code | 3.000K 592063-TC | 3.000K 592063-G12/3 | 3.000K 3570 |
| | 4.000K 592063-TF | 4.000K 592063-G12/4 | 4.000K 3571 |
| | 6/30 | 10/50 | 10/50 |

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C


| Lineal tubular 5W R7S | Lineal tubular 9W R7S | Lineal tubular 9W R7S dimmable |
|---|---|---|











## Technical Information


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 5W | | 9W | | 9W | | |
| Color Temperature | 3.000K / 4.000K | | 3.000K / 4.000K | | 3.000K / 4.000K | | |
| Lumens | 561 lm / 574 lm | | 935 lm / 1.000 lm | | 935 lm / 1.000 lm | | |
| Code | 3.000K | 140026-C3T | 3.000K | 141123-TC3 | 3.000K | 141123-TC3D | |
| | 4.000K | 140026-F4T | 4.000K | 141123-TF4 | 4.000K | 141123-TF4D | |
| | | 3 YEARS WARRANTY | | 3 YEARS WARRANTY | | 4 YEARS WARRANTY | TRIAC DIMM |

CE RoHS

25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 6/30


## Lineal tubular 11W R7S dimmable







## Lineal 13W R7S






## Lineal 9W R7S






### Technical Information


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 11W | | 13W | | 9W | | |
| Color Temperature | 3.000K / 4.000K | | 3.000K / 4.000K / 5.000K | | 3.000K / 4.000K | | |
| Lumens | 1.210 lm / 1.280 lm | | 1.700 lm / 1.780 lm / 1.800 | | 858 lm / 880 lm | | |
| Code | 3.000K | 3477 | 3.000K | 3904 | 3.000K | 140L026L | |
| | 4.000K | 3478 | 4.000K | 3905 | 4.000K | 140L0261L | |
| | | | 5.000K | 3906 | | | |
| | IP 40 \| 360° \| TRIAC DIMM | | IP 40 \| 160° | | IP 20 \| 120° | | |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 50/60 Hz | +40°C -20°C | 6/30


## Esférica 5W E14/E27







## Esférica 5,5W E14/E27 dimmable






## Esférica 7W E14/E27






### Technical Information


| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Power | 5W | | | 5,5W | | | 7W | |
| Color Temperature | 2.700K/3.000K/4.000K/5.000K | | | 2.700K / 3.000K / 4.000K | | | 2.700K/3.000K/4.000K/5.000K | |
| Lumens | 440 lm/462 lm/484 lm/495 lm | | | 396 lm / 418 lm / 440 lm | | | 700 lm/750 lm/800 lm/820 lm | |
| Code | 2.700K | E14 | 592563-4C2(N) | 2.700K | E14 | 592563R-C2 | 2.700K | E14 4243 |
| | 2.700K | E27 | 5925631-4C2(N) | 2.700K | E27 | 592563R1-C2 | 2.700K | E27 4244 |
| | 3.000K | E14 | 592563(N)-4C(N2) | 3.000K | E14 | 592563R-C3 | 3.000K | E14 4245 |
| | 3.000K | E27 | 5925631(N)-4C(N2) | 3.000K | E27 | 592563R1-C3 | 3.000K | E27 4246 |
| | 4.000K | E14 | 592563(N)-4F(N2) | 4.000K | E14 | 592563R-F4 | 4.000K | E14 4247 |
| | 4.000K | E27 | 5925631(N)-4F(N2) | 4.000K | E27 | 592563R1-F4 | 4.000K | E27 4248 |
| | 5.000K | E14 | 3538(N) | | | | 5.000K | E14 4249 |
| | 5.000K | E27 | 3537(N) | | | | 5.000K | E27 4250 |
| | 5 YEARS WARRANTY \| 50.000 HOURS \| IP 40 | | | 3 YEARS WARRANTY \| 25.000 HOURS \| IP 40 \| TRIAC DIMM | | | 3 YEARS WARRANTY \| 25.000 HOURS \| IP 20 | |

CE RoHS EMC

220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


## Standard 6W E27






## Standard 9W E27






## Technical Information

| | | |
|---|---|---|
| Power | 6W | 9W |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K/3.000K/4.000K/5.000K |
| Lumens | 534 lm / 550 lm / 660 lm | 880 lm/891 lm/935 lm/945 lm |


| | | | | |
|---|---|---|---|---|
| Code | 2.700K | 592125S-6(N) | 2.700K | 592125SC-2(N) |
| | 3.000K | 592125S-6C(N) | 3.000K | 592125SC-3(N) |
| | 4.000K | 592125S-6F(N) | 4.000K | 592125SC-4(N) |
| | | | 5.000K | 3539(N) |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


## Standard 12W E27






## Standard 15W E27






### Technical Information

| | 12W | 15W |
|---|---|---|
| Power | 12W | 15W |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 1.100 lm / 1.122 lm / 1.144 lm | 1.550 lm / 1.600 lm / 1.650 lm |

| Code | | | | |
|---|---|---|---|---|
| | 2.700K | 3479(N) | 2.700K | 3482(N) |
| | 3.000K | 3480(N) | 3.000K | 3483(N) |
| | 4.000K | 3481(N) | 4.000K | 3484(N) |

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50


| Standard 10W E27 dimmable | Standard 12W E27 dimmable | Standard 17W E27 dimmable |
|---|---|---|











## Technical Information

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 10W | | 12W | | 17W | | |
| Color Temperature | 2.700K / 3.000K / 4.000K | | 2.700K / 3.000K / 4.000K | | 2.700K/3.000K/4.000K/5.000K | | |
| Lumens | 880 lm / 891 lm / 935 lm | | 1.100 lm / 1.122 lm / 1.144 lm | | 1.550 lm / 1.600 lm / 1.650 lm / 1.700 lm | | |
| Code | 2.700K | 592125R-C | 2.700K | 592125R2-C | 2.700K | 3527 | |
| | 3.000K | 592125R-C3 | 3.000K | 592125R2-C3 | 3.000K | 3528 | |
| | 4.000K | 592125R-F | 4.000K | 592125R2-F | 4.000K | 3529 | |
| | | | | | 5.000K | 3530 | |

CE RoHS EMC


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | 10/50


| Micro globo 6W E27 | Globo 10W E27 | Globo 10W E27 dimmable |
|---|---|---|











## Technical Information


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 6W | | 10W | | 10W | | |
| Color Temperature | 2.700K / 3.000K | | 2.700K / 3.000K / 4.000K | | 3.000K | | |
| Lumens | 480 lm / 500 lm | | 1.100 lm / 1.130 lm / 1.180 lm | | 800 lm | | |
| Code | 2.700K | 505143E-C | 2.700K | 3524 | 3.000K | 505119DIM-C | |
| | 3.000K | 3881 | 3.000K | 3525 | | | |
| | | | 4.000K | 3526 | | | |
| | 5 YEARS WARRANTY \| 50.000 HOURS | | 3 YEARS WARRANTY \| 25.000 HOURS | | 3 YEARS WARRANTY \| 25.000 HOURS \| TRIAC DIMM | | |

CE RoHS EMC

IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/40


## Globo 15W E27







## Globo 16W E27






## Globo 22W E27






### Technical Information


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 15W | | 16W | | 22W | | |
| Color Temperature | 2.700K / 4.000K | | 2.700K / 3.000K / 4.000K | | 2.700K / 3.000K / 4.000K | | |
| Lumens | 1.400 lm / 1.500 lm | | 1.600 lm / 1.700 lm / 1.750 lm | | 2.400 lm / 2.500 lm / 2.600 lm | | |
| Code | 2.700K | 4677 | 2.700K | 3521 | 2.700K | 3518 | |
| | 4.000K | 4678 | 3.000K | 3522 | 3.000K | 3519 | |
| | | | 4.000K | 3523 | 4.000K | 3520 | |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/40


## Flama E14/E27






## Flama dimmable E14






### Technical Information

| | | |
|---|---|---|
| Power | 5,5W | 5,5W |
| Color Temperature | 2.700K / 3.000K / 5.000K | 3.000K |
| Lumens | 450 lm / 500 lm / 550 lm | 418 lm |

| Code | | | | | |
|---|---|---|---|---|---|
| | 2.700K | E14 | 592122-FL2 | 3.000K | 592122R-C3 |
| | 2.700K | E27 | 592122-FL2E | | |
| | 3.000K | E14 | 592122-FL3 | | |
| | 3.000K | E27 | 592122-FLE3 | | |
| | 5.000K | E14 | 3534 | | |

TRIAC DIMM

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

## R-63 s-line GU10









## Technical Information

| | |
|---|---|
| Power | 8W |
| Color Temperature | 2.700K |
| Lumens | 720 lm |

| | |
|---|---|
| Code | 4003 |

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 220/240 VAC | PF >0,8 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

| R-39 E14 | R-50 E14 | R-63 E27 |
|---|---|---|
|  |  |  |
|  |  |  |

## Technical Information

| | | | |
|---|---|---|---|
| Power | 3W | 5W | 8W |
| Color Temperature | 3.000K | 3.000K | 3.000K |
| Lumens | 308 lm | 385 lm | 660 lm |
| Code | 592122R39-2 | 5920731-(N2) | 592072-1 |
| | IP 40 | IP 40 | IP 20 |

CE RoHS


3 YEARS WARRANTY | 25.000 HOURS | 220/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/50


| R-80 E27 | R-90 2.200K E27 | R-90 3.000K E27 |
|---|---|---|

















## Technical Information

| | | | |
|---|---|---|---|
| Power | 10W | 12W | 12W |
| Color Temperature | 3.000K | 2.200K | 3.000K |
| Lumens | 891 lm | 850 lm | 1.100 lm |
| Code | 592076-C3(N) | 4137 | 592074-C(N) |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/40

| Par 30 E27 | Par 38 3.000K E27 | Par 38 Green E27 |
|---|---|---|
|  |  |  |
|   |   |   |

## Technical Information


| | | | |
|---|---|---|---|
| Power | 10W | 15W | 15W |
| Color Temperature | 3.000K | 3.000K | Green |
| Lumens | 660 lm | 1.100 lm | 190 lm |
| Code | 171160P30-C | 171160P38(N)-C | 3579 |
| | 45° | 30° | 30° |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,8 | CRI ≥80 | 50/60 Hz | +40°C -20°C | 10/40

## Sil E27






### Technical Information

| | |
|---|---|
| Power | 20W |
| Color Temperature | 2.700K / 4.000K |
| Lumens | 2.035 lm / 2.550 lm |


| Code | | |
|---|---|---|
| | 2.700K | 592165SIL-C |
| | 4.000K | 592165SIL-F |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥85 | 360° | 50/60 Hz | +40°C -20°C | 6/24


## Aria 30W E27/E40






## Aria 50W E27/E40






### Technical Information

| | 30W | 50W |
|---|---|---|
| Power | | |
| Color Temperature | 2.700K / 5.000K | 2.700K / 5.000K |
| Lumens | 3.100 lm / 3.550 lm | 5.400 lm / 6.200 lm |


| Code | | | | | | |
|---|---|---|---|---|---|---|
| | 2.700K | E27 | 3854 | 2.700K | E27 | 3858 |
| | 2.700K | E40 | 3856 | 2.700K | E40 | 3860 |
| | 5.000K | E27 | 3855 | 5.000K | E27 | 3859 |
| | 5.000K | E40 | 3857 | 5.000K | E40 | 3861 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | > 1KV | ENCLOSED NO | 6/24

## Cup 45W E27/E40






## Technical Information

| | |
|---|---|
| Power | 45W |
| Color Temperature | 3.000K |
| Lumens | 3.960 lm |


| | | | |
|---|---|---|---|
| Code | 3.000K | E27 | 592141-C3E2 |
| | 3.000K | E40 | 592141-E4C3 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | ENCLOSED NO | 6


## Obo 19W E27






## Obo 27W E27






### Technical Information

| | | |
|---|---|---|
| Power | 19W | 27W |
| Color Temperature | 2.200K / 5.000K | 2.200K / 5.000K |
| Lumens | 1.425 lm / 1.900 lm | 2.025 lm / 3.000 lm |


| | | | | |
|---|---|---|---|---|
| Code | 2.200K | 3909 | 2.200K | 3910 |
| | 5.000K | 3917 | 5.000K | 3918 |

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 170° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK | 16


## Obo 36W E27/E40






## Obo 45W E27/E40







## Technical Information

| | | |
|---|---|---|
| Power | 36W | 45W |
| Color Temperature | 2.200K / 5.000K | 2.200K / 5.000K |
| Lumens | 2.700 lm / 3.900 lm | 3.375 lm / 4.500 lm |




| Code | | | | | | |
|---|---|---|---|---|---|---|
| | 2.200K | E27 | 3911 | 2.200K | E27 | 3912 |
| | 2.200K | E40 | 3920 | 2.200K | E40 | 3923 |
| | 5.000K | E27 | 3919 | 5.000K | E27 | 3922 |
| | 5.000K | E40 | 3921 | 5.000K | E40 | 3924 |

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 170° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK | 16

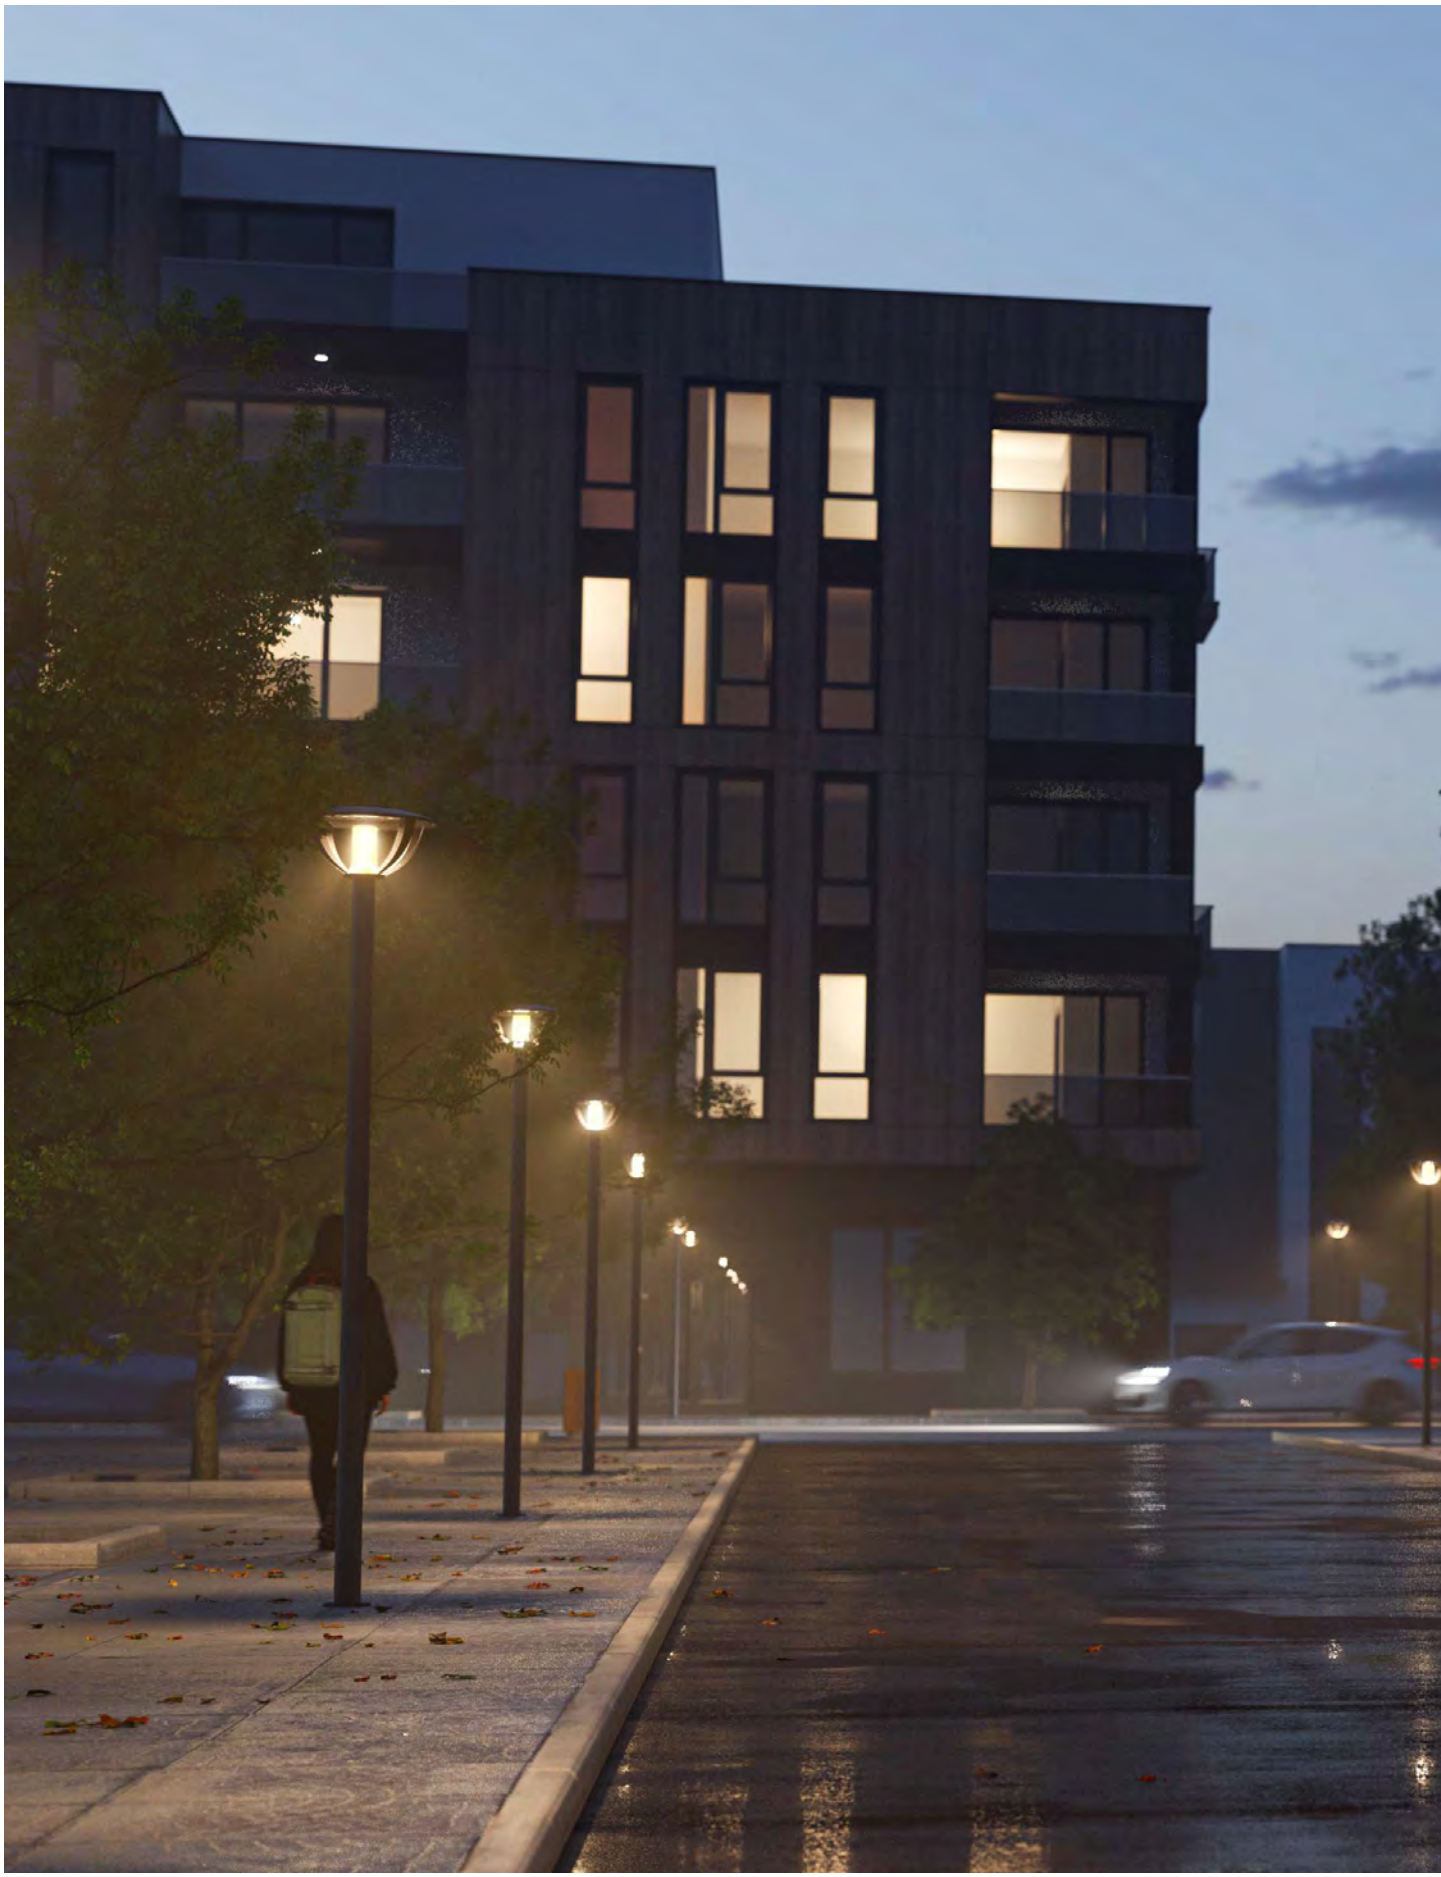



| Smile 20W E27 | Smile 40W E27 | Smile 60W E40 |
|---|---|---|
|  |  |  |
|  |  |  |

## Technical Information


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 20W | | 40W | | 60W | | |
| Color Temperature | 2.200K / 5.000K | | 2.200K / 5.000K | | 2.200K / 5.000K | | |
| Lumens | 2.000 lm / 3.000 lm | | 4.000 lm / 6.000 lm | | 6.000 lm / 9.000 lm | | |
| Code | 2.200K | 3913 | 2.200K | 3914 | 2.200K | 3915 | |
| | 5.000K | 3925 | 5.000K | 3926 | 5.000K | 3927 | |
| | 24 | | 12 | | 12 | | |

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 120° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK


## Noa 80W E27/E40






## Noa 85W E27/E40






## Technical Information

| | | |
|---|---|---|
| Power | 80W | 85W |
| Color Temperature | 2.200K | 2.700K / 5.000K |
| Lumens | 5.900 lm | 9.700 lm / 10.200 lm |

| | | | | | | |
|---|---|---|---|---|---|---|
| Code | 2.200K | E27/ E40 | 3965 | 2.700K | E27 | 3902 |
| | | | | 2.700K | E40 | 3900 |
| | | | | 5.000K | E27 | 3903 |
| | | | | 5.000K | E40 | 3901 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | ENCLOSED NO | 8

# Conditions

PRICES UPDATE - INTERNET UPDATE - PDF

Our interest in new solutions and for the development of lighting technology and lighting industry, we are constantly innovating. This is why BENEITO FAURE offers to its customers a frequently online updated PDF to inform about all our news.

You can find all the information on our website:

www.beneito-faure.com

IMPORTANT:

All information on the website can be cancelled and replaced by another one, and will be the last update the only right one.

For this reason is very important to visit our web.

TARIFA BENEITO FAURE - ACTUALIZACIÓN DIGITAL – PDF

Nuestra implicación desde BENEITO FAURE por una continua elaboración de soluciones avanzadas, junto al progresivo cambio tecnológico de la industria de la iluminación en los últimos años, nos hace estar en constante innovación.

Por ello, ponemos al servicio de todos nuestros clientes una actualización frecuente on-line (formato PDF) con la intención de tenerlos informados en todo momento de las últimas novedades de BENEITO FAURE.

La mencionada actualización se encuentra disponible en nuestra página WEB:

www.beneito-faure.com

IMPORTANTE:

Cualquier información publicada quedará anulada y sustituida por la que aparece en cada momento en nuestra WEB, siendo esta la única con validez y vigencia de gama y precios de venta recomendados.

Por ello, desde Beneito Faure recomendamos a todos nuestros clientes visiten nuestra página web.

GENERAL CONDITIONS OF SALE

BENEITO FAURE S.L reserves the right to make the variations it deems appropriate to its products, not being responsible for the possible erroneous information that appears in the catalog.

RATE

For any type of order the rate and conditions in force at the time of receipt of the order will apply. The rate will be sent via email to all customers in the BENEITO FAURE database and will be updated whenever necessary. Prices do not include VAT if recycling rate.

ORDERS

Orders must be sent via email. No order will be placed by phone or any other means. The quote of the material to be made to measure will be sent to the customer for acceptance and will not be processed prior receiving the copy signed for acceptance.

RETURNS

To make any return, the authorization must be requested from BENEITO FAURE. The return of the material must be communicated by e-mail indicating the customer's name, the reason of the return, the date of purchase, the number of units and the reference of the product to be returned. It is mandatory to attach a copy of the purchase invoice. The acceptance of the return does not imply the definitive acceptance of it. The return will be definitive only after the subsequent verification and analysis of the product by our technical department. Returns of merchandise will only be accepted if in perfect condition for sale and in the original packaging in good condition. The packaging label must also be intact. Returns will not be compensated by an economic amount and must be sent by means of the client's transport. The return of material may be compensated by prior order and with the authorization of BENEITO FAURE. The return of the products made to measure or previously processed by the technical department due to the customer's request, will not be accepted.

TRANSPORT

Unless other transport terms are agreed, the merchandise will travel on behalf of those purchased with the EXWORKS conditions. Likewise, BENEITO FAURE will offer a delivery time for each territory, this being always approximate. The company will not be responsible for possible alterations or delays on this time caused by causes outside the company.

DELIVERY TERM

The availability terms offered by BENEITO FAURE are always approximate and may be subject to variations. These possible variations in the terms will not imply the acceptance of the responsibility or penalties for the delay by BENEITO FAURE.

CLAIMS

On the delivery note of the carrier, any visible anomaly must be recorded and, after having reviewed the material, communicate in writing to our offices the incident within 24 hours of receiving the merchandise. Once this time has elapsed, the company will not be able to take charge of the claim because it is not in time for the transport agency. For other types of claims, you must contact our offices by written email. The product that does not work correctly will be replaced by the same article or another with the same characteristics. In no case will we be responsible for the costs of labor that may be caused by the malfunction of a product in our catalog.

WARRANTY

BENEITO FAURE guarantees that the products sold are in perfect condition. The warranty will cover the repair or replacement of the product (under the decision of BENEITO FAURE) and it will be necessary to send the incident by email. The product warranty is in its packaging. The technical department of BENEITO FAURE will be the only one authorized to determine if it is a manufacturing defect, after receiving the incident and the sales invoice in writing for prior verification. B E N E I T O FAURE quantifies the warranty time considering the date of the customer's purchase invoice and not on the hours of operation of the product.

The WARRANTY will not be covered:

1. If the product has been previously handled.
2. It is not installed according to the instructions.
3. If the ventilation of which is not adequate.
4. Problems with partial or total payment by the client.

JURISDICTION

In any discrepancy or dispute, both parties will submit to the jurisdiction of the Judges and courts of Barcelona.

PROPERTY RESERVATION

BENEITO FAURE reserves the right to own all the materials that it supplies until the buyer has paid the total amount thereof.

The requested goods are supplied under reservation of ownership in favor of BENEITO FAURE

The client is obliged to cooperate and take all steps necessary or desirable, and to propose or need to BENEITO safeguard their ownership of the goods. The serve of domain remains even in the event that the client had accepted and recognized credits against BENEITO or had established a system of accounts between them. The transformation or improvement of goods on which BENEITO has reserve domain, does not give property to client or manipulative. In case of union, transformation and/or accession of goods under domain's reserve to thirds, subsist the domain's reserve in proportion to the value that the goods subject had to domain's reserve before to accession. The client may sell the goods subject to domain's reserve in the ordinary course of business, provided those no breach his payment obligations to BENEITO. Upon a resale of goods subject to domain's reserve, occurs automatically the transfer to BENEITO of credits arising of that sale to the seller, and any other credit arising in the case of compensation for loss of thing, tort-contract, etc. in such cases, the client is obliged to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obligated to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obliged it to give them. If before performed the pay of total price, the goods sold were affected by some lien or lock, the client shall be obliged to sate explicitly in the diligence of the embargo, that the goods are owned by BENEITO and if, despite this, were seized, must facilitate to BENEITO the exercise by the relevant third domain action, whose expenses will be paid by the client.

ALLGEMEINE GESCHÄFTSBEDINGUNGEN

BENEITO FAURE S.L behält sich das Recht, etwaige, für erforderlich gehaltene Änderungen an den Produkten vorzunehmen, und ist nicht für mögliche Fehlinformationen im entsprechenden Katalog haftbar.

PREISLISTE

Alle Bestellungen unterliegen der zum Zeitpunkt der Bestellung geltenden Preisliste und den entsprechenden Geschäftsbedingungen. Die Preisliste wird per E-Mail an alle Kunden, die sich in der Datenbank von BENEITO FAURE befinden, geschickt und wird, wenn erforderlich, entsprechend aktualisiert werden. Die Preise enthalten weder die Mehrwertsteuer noch die Recyclinggebühr.

BESTELLUNGEN

Bestellungen müssen per E-Mail geschickt werden. Es werden keine Bestellungen telefonisch oder auf sonstigem Wege entgegengenommen. Der Kostenvoranschlag bzw. das Angebot für das nach Kundenvorgaben anzufertigende Produkt, wird dem Kunden zur Prüfung und zur Freigabe zugesandt und wird erst nach Erhalt der geprüften Auftragsfreigabe bearbeitet.

RÜCKGABEN

Alle Rückgaben müssen vorab bei BENEITO FAURE beantragt und von der Firma genehmigt werden. Die Rücksendung-Anfrage des Materials muss per E-Mail unter Angabe des Kundennamens, des Grundes der Rücksendung, des Kaufdatums, der Anzahl der Einheiten und der Referenz des zurückzusendenden Produkts erfolgen. Es ist zwingend erforderlich, eine Kopie der Kaufrechnung beizufügen. Die Annahme der Rücksendung bedeutet nicht die endgültige Annahme. Die Rücksendung ist erst nach der anschließenden Überprüfung und Analyse des Produkts durch unsere technische Abteilung endgültig. Warenrücksendungen werden nur akzeptiert, wenn sie sich in einwandfreiem Zustand zum Verkauf und in der Originalverpackung in gutem Zustand befinden. Das Verpackungsetikett muss ebenfalls intakt sein. Rückgaben werden nicht durch einen Geldbetrag ausgeglichen und müssen vom Kunden mit eigenen Transportmitteln geschickt werden. Die Materialrückgabe kann, nach Genehmigung von BENEITO FAURE, durch eine Vorbestellung ausgeglichen werden. Die Rücksendung der nach Maß gefertigten oder zuvor von der technischen Abteilung auf Kundenwunsch gefertigten Produkte wird nicht akzeptiert.

TRANSPORT

Außer im Falle von gesondert vereinbarten Transportbedingungen, wird die Ware unter ex-works Bedingungen zu Lasten des Käufers versendet werden. BENEITO FAURE wird die Lieferzeiten stets dem Empfangsort entsprechend angeben, wobei es sich immer um annähernde Zeiten handeln wird. Das Unternehmen ist nicht für etwaige Änderungen oder Verspätungen haftbar, die sich aus Gründen, die nicht vom Unternehmen zu verantworten sind, ergeben.

DLIEFERZEIT

Die von BENEITO FAURE genannten Lieferzeiten und Verfügbarkeiten verstehen sich immer als ca. Angaben und können Änderungen unterliegen. Diese möglichen Änderungen der Lieferzeiten bedeuten nicht die Anerkennung der Verantwortung oder die Auferlegung einer Strafe als Folge des Verzugs durch BENEITO FAURE.

REKLAMATIONEN

Jegliche sichtbaren Mängel müssen auf dem Lieferschein des Transportunternehmens eingetragen werden. Nach Prüfung der Ware, müssen etwaige Vorfälle unserer Firma innerhalb der nächsten 24 Stunden schriftlich mitgeteilt werden. Nach dieser Frist übernimmt die Firma keine Haftung für Reklamationen, da die vom Transportunternehmen vorgeschriebene Frist abgelaufen ist. Im Falle sonstiger Reklamationen müssen diese unserer Verwaltung schriftlich mitgeteilt werden. Produkte, die nicht korrekt funktionieren, werden durch gleiche Produkte, oder Produkte mit den gleichen Eigenschaften, ersetzt. In keinem Fall werden wir die Arbeitskosten übernehmen, die sich aus der Fehlfunktion eines Produkts aus unserem Katalog ergeben könnten.

GARANTIE

BENEITO FAURE garantiert, dass die verkauften Produkte sich in perfektem Zustand befinden. Die Garantie deckt die Reparatur oder den Ersatz des Produkts (nach Entscheidung von BENEITO FAURE). Der Fall muss jedoch vorab per E-Mail angezeigt werden. Die Produktgarantie befindet sich in der Produktverpackung.Die technische Abteilung von BENEITO FAURE ist die einzige autorisierte Stelle, um die Entscheidung zu treffen, ob es sich um einen Herstellungsfehler handelt, nachdem der Fall schriftlich gemeldet wurde, samt Rechnung, zur entsprechenden Prüfung.
BENEITO FAURE bewertet die Garantiezeit unter Berücksichtigung des Datums der Kaufrechnung des Kunden und nicht anhand der Betriebsstunden des Produktes.

Die GARANTIE gilt nicht:

1. Wenn das Produkt manipuliert wurde.
2. Wenn das Produkt nicht gemäß Anleitungen installiert wurde.
3. Wenn die Produktbelüftung nicht geeignet ist.
4. Wenn Probleme für die teilweise oder vollständige Zahlung durch den Kunden vorliegen.

GERICHTSBARKEIT

Im Falle etwaiger Uneinigkeiten oder Streitfälle, werden sich beide Parteien der Gerichtsbarkeit der Richter und Gerichte von Barcelona unterwerfen.

EIGENTUMSVORBEHALT

BENEITO FAURE behält sich das Eigentumsrecht auf alle gelieferten Materialien, bis der Käufer den gesamten Kaufbetrag beglichen hat.

Die bestellten Waren werden unter Eigentumsvorbehalt zu Gunsten von BENEITO geliefert, bis der Kunde allen ahlungsverpflichtungen nachgekommen ist. Der Kunde verpflichtet sich, zu kooperieren und alle notwendigen oder angemessenen Maßnahmen und solche Maßnahmen, die BENEITO vorschlägt oder benötigt, zu ergreifen, um sein Eigentum über die Ware zu schützen. Der Eigentumsvorbehalt besteht selbst dann weiter, wenn der Kunde akzeptierte und anerkannte Forderungen gegenüber BENEITO hätte, oder wenn ein System laufender Konten zwischen beiden Parteien bestünde. Die Transformation oder Verbesserung der Ware für die BENEITO einen Eigentumsvorbehalt hat, überträgt sein Eigentum nicht an den Kunden oder den Anwender. Im Falle von Zusammenführung, Transformation und/oder Beistellung von Produkten unter Eigentumsvorbehalt mit Produkten von Dritten besteht der Eigentumsvorbehalt in Proportion entsprechend dem Wert, den die Produkte mit Eigentumsvorbehalt vor der Beistellung hatten, fort. Der Kunde kann die Waren unter Eigentumsvorbehalt im Rahmen seiner gewöhnlichen Geschäfte verkaufen, solange er seinen Zahlungsverpflichtungen gegenüber BENEITO nachkommt. In jedem Fall erfolgt bei einem Wiederverkauf der Waren unter Eigentumsvorbehalt automatisch eine Abtretung der aus diesem Wiederverkauf entstehenden Forderungen zugunsten des Verkäufers an BENEITO, sowie eine Abtretung aller anderen Forderungen, die ggf. als Entschädigungen durch Warenverlust, außervertragliche Haftung usw. entstehen. Der Kunde ist in diesen Fällen dazu verpflichtet, BENEITO alle für die Reklamation der übertragenen Forderungen notwendigen Informationen und Unterlagen zur Verfügung zu stellen. Im Falle einer Nichteinhaltung seitens des Kunden, und insbesondere im Fall von verspäteten Zahlungen oder Konkurserklärung seitens des Kunden, reklamiert BENEITO als Eigentümer der Ware, nach vorheriger Mitteilung an den Kunden, die Zurückgabe der Ware seitens des Kunden. Sollte die verkaufte Ware vor der vollständigen Bezahlung des Preises Gegenstand von Pfändung oder Handelshemmnis werden, ist der Kunde verpflichtet, bei der Pfändungsmaßnahme ausdrücklich darauf hinzuweisen, dass die Waren Eigentum von BENEITO sind und, sollten sie trotz dieser Erklärung gepfändet werden, die Durchführung des entsprechenden Drittwiderspruchs, dessen Kosten zu Lasten des Kunden gehen, seitens BENEITO zu ermöglichen.

CONDITIONS GÉNÉRALES DE VENTE

BENEITO FAURE S.L. se réserve le droit de faire les variations qu'elle juge appropriées à ses produits n'étant pas responsable de toute information erronée qui apparaît dans le catalogue.

TARIF

Pour tout type de commande, nous appliquerons les tarifs et conditions en vigueur au moment de la réception de la commande. Le tarif sera envoyé par e-mail à tous les clients qui sont dans la base de données de BENEITO FAURE et sera mis à jour si nécessaire. Les prix n'incluent pas la TVA.

COMMANDES

Les commandes doivent être envoyées par EMAIL. Aucune commande ne sera passée par téléphone ou par tout autre moyen. Les devis de matériel qui doit être manipulé sur mesure seront soumis au client pour validation et ne seront pas traités avant de recevoir la copie signée du bon pour accord.

RETOURS

Pour tout retour, une autorisation préalable doit être demandée à BENEITO FAURE. Il faudra communiquer le motif du retour par courrier électronique en indiquant le nom du client, la date d'achat, les unités et la référence du produit retourné, le motif du retour et le bon de livraison concerné. L'acceptation du retour n'implique pas l'acceptation définitive de celui-ci. Le retour ne sera définitif qu'après vérification et analyse du produit par notre service technique. Les retours de marchandises ne seront acceptés que si le matériel est en parfait état pour la vente et dans son emballage d'origine en bon état, ainsi que l'étiquette de l'emballage.
Les retours ne seront pas compensés par un montant économique et ils devront être envoyés par le biais du transport du client. Le retour du matériel peut être compensé au moyen d'une commande préalable et avec l'autorisation de BENEITO FAURE. Nous n'accepterons pas les retours de produits de fabrication spéciale ou préalablement manipulés par le service technique à la demande du client.

TRANSPORT

Sauf convention contraire, les marchandises voyagent pour le compte de ceux qui achètent aux conditions EXWORKS. De même, BENEITO FAURE proposera un délai de livraison pour chaque territoire, toujours approximatif. La société ne sera pas responsable d'éventuelles modifications ou retards sur ce délai produits par des causes externes à la société.

TEMPS DE LIVRAISON

Les périodes de disponibilité offertes par BENEITO FAURE sont toujours approximatives et peuvent faire l'objet de variations. Ces éventuelles variations de conditions n'impliquent pas l'acceptation de responsabilité ou de pénalités de retard de la part de BENEITO FAURE.

RÉCLAMATIONS

Le bon de livraison du transporteur doit mentionner toute anomalie visible et, après examen du matériel, communiquer par écrit à nos bureaux l'incident dans les 24 heures suivant la réception des marchandises. Passé ce délai, l'entreprise ne pourra pas prendre en charge la réclamation pour ne pas être dans le délai par l'agence de transport. Pour les autres types de réclamations, vous devez communiquer par écrit à nos bureaux. Le produit qui ne fonctionne pas correctement sera remplacé par un autre égal ou qui remplit les mêmes caractéristiques. En aucun cas nous ne prendrons en charge les coûts de main d'œuvre qui peuvent être occasionnés par le dysfonctionnement d'un produit de notre catalogue.

GARANTIE

BENEITO FAURE garantit que les produits vendus sont en parfait état. La garantie couvrira la réparation ou le remplacement du produit (à la discrétion de BENEITO FAURE) et il sera nécessaire d'envoyer l'incident par email. La garantie du produit se trouve sur l'emballage du produit. Le service technique de BENEITO FAURE sera le seul autorisé à déterminer s'il s'agit d'un défaut de fabrication, après avoir reçu par écrit l'incidence et la facture de vente pour vérification préalable. BENEITO FAURE base la période de garantie sur les années écoulées depuis l'achat du produit par le client, et non sur les heures d'utilisation du produit.

La GARANTIE ne sera pas couverte :

1. Si le produit a déjà été manipulé.
2. N'a pas été installé conformément aux instructions.
3. Si la ventilation n'est pas suffisante.
4. Problèmes de paiement partiel ou total par le client.

JURIDICTION

En cas de désaccord ou de litige, les deux parties se soumettront à la juridiction des juges et tribunaux de Barcelone.

RÉSERVE DE PROPRIÉTÉ

BENEITO FAURE se réserve la propriété de tous les matériaux qu'elle fournit jusqu'au paiement intégral par l'acheteur.

La marchandise commandée est livrée sous réserve de propriété en faveur de BENEITO FAURE jusqu'à l'exécution complète des obligations de paiement du client.

Le client est tenu de coopérer et de prendre les mesures nécessaires et celles que BENEITO FAURE propose pour préserver sa propriété des marchandises. La réservation du domaine persiste même si le client a accepté et reconnu des crédits sur BENEITO FAURE ou si un système de comptes courants a été établi entre eux. La transformation ou l'amélioration de la marchandise sur laquelle BENEITO FAURE a une réserve de propriété ne confère pas sa propriété au client ou au manipulateur. Toute supposition d'union, de transformation et/ou d'adhésion des produits sous la réserve de dominion aux produits de tiers subsistera la réserve de dominion dans la proportion correspondant à la valeur qui avait les produits objet de la réserve de dominion avant l'adhésion. Le client peut vendre la marchandise sous réserve de propriété dans le cours normal de ses affaires, à condition qu'il n'ait pas manqué à ses obligations de paiement envers BENEITO FAURE. En tout état de cause, en cas de revente de marchandises sous réserve de propriété, il y a cession de plein droit à BENEITO FAURE des crédits nés de cette revente en faveur du vendeur, ainsi que de tous autres crédits antérieurs, en cas d'indemnisation pour perte de la chose, responsabilité civile, etc. Dans ces cas, le client sera tenu de fournir à BENEITO FAURE toutes les informations et documents nécessaires à la réclamation des crédits subrogés. En cas de non-respect de la part du client, et notamment en cas de retard de paiement ou de déclaration de faillite du client, BENEITO FAURE se réserve le droit de réclamer, moyennant notification préalable au client, la possession des marchandises, le client étant tenu de les lui livrer. Si, avant le paiement intégral du prix, les marchandises vendues font l'objet d'une saisie ou d'un empêchement, le client est tenu de déclarer expressément, dans le cadre de la saisie, que les marchandises sont prioritaires pour BENEITO FAURE et si, malgré cette déclaration, elles sont saisies, BENEITO FAURE pourra exercer l'action correspondante du tiers, dont les frais seront à charge du client.

CONDIZIONI GENERALI DI VENDITA

BENEITO FAURE S.L. si riserva il diritto di realizzare le variazioni che considera opportune sui proprio prodotti non essendo responsabile di possibili informazioni errate che possono apparire nel catalogo.

LISTINO PREZZI

Per qualsiasi ordine si applicano le condizioni di vendita in vigore al momento della ricezione dello stesso.Il listino prezzi e' inviato tramite mail a tutti i clienti inseriti nel data base di BENEITO FAURE e puo' essere aggiornato in qualsiasi momento se necessario.I prezzi sono da intendersi IVA esclusa. Tassa di riciclaggio inclusa.

ORDINI

Gli ordini devono essere inviati esclusivamente tramite mail. Non sara' processato nessun ordine via telefono o tramite altri mezzi. I preventivi del materiale che deve essere fatto su misura saranno inviati al cliente per accettazione e non saranno elaborati fino al ricevimento della copia firmata per accettazione.

RESI

Per procedere con qualsiasi reso e' necessario ricevere l'autorizzazione di BENEITO FAURE. Il motivo del reso deve essere comunicato tramite e-mail indicando il nome del cliente, la data di acquisto, le unità ed il riferimento del prodotto da rendere. È obbligatorio allegre sempre la copia della fattura d'acquisto. L'accettazione del reso non implica l'accettazione definitiva dello stesso. Il reso sarà definitivo solo dopo la successiva verifica ed analisi del prodotto da parte del nostro ufficio tecnico. I resi di merce saranno accettati solo se in perfette condizioni per la vendita e nella confezione originale in buone condizioni. Anche l'etichetta dell'imballo deve essere integra..I resi non vengo rimborsati e devo essere spediti unicamente dal cliente all'azienda. I resi vengono compensati con articoli sostitutivi tramite autorizzazione di BENEITO FAURE. Non saranno accettati resi di prodotti fatti su misura o precedentemente trattati dall'ufficio tecnico su richiesta del cliente.

CONSEGNA

A meno che non si accordino speciali condizioni e termini, il trasporto è a carico del destinatario: EX-WORKS. Alternativamente BENEITO FAURE dispone di un servizio di consegna per ogni territorio e la resa ed il presso variano a seconda della destinazione. L'azienda non si fa carico di eventuali danni o alterazioni subiti dalla merce durante il trasporto non imputabili dall'azienda stessa.

TEMPI DI CONSEGNA

I tempi di consegna offerti da BENEITO FAURE sono sempre approssimati e possono essere soggetti a variazioni. Queste possibili variazioni non implicano l'accettazione di eventuali responsabilità o penalizzazioni subite a cause del ritardo di BENEITO FAURE.

RECLAMI

Nel documento di trasporto dell'autista deve essere segnalata qualsiasi visibile anomalia. Deve essere effettuato il controllo della merce e segnalato all'azienda entro e non oltre le 24 ore dalla ricezione. Superato questo tempo, l'azienda non si fara' carico del reclamo per il ritardo dovuto all'agenzia di trasporto. Qualsiasi altro reclamo dovra' essere trasmesso in forma scritta all'azienda. Il prodotto non funzionante sara' sostituito con il corrispettivo uguale o che presenti le medesime caratteristiche. In nessun caso l'impresa si fara' carico dei costi sostenuti per il mal funzionamento di un prodotto del nostro catalogo.

GARANZIA

Beneito Faure garantisce che i prodotti vengono venduti in perfetto stato.La garanzia copre la riparazione o la sostituzione del prodotto (sotto conferma di BENEITO FAURE) ed e' necessario l'invio della contesazione via mail.La garanzia del prodotto si trova all'interno dell'imballo.Il dipartimento tecnico di BENEITO FAURE sara' l'unico autorizzato a determinare se si tratta di un difetto di fabbricazione, dopo aver ricevuto in forma scritta la contestazione e la fattura di vendita per poter verificare l'effettivo periodo di garanzia. B E N E I T O  F A U R E quantifica il tempo di garanzia considerando la data della fattura di acquisto del cliente e non sulle ore di funzionamento del prodotto.

La GARANZIA non sara' valida se:

1. Il prodotto viene manomesso o manipolato
2. Il prodotto non e' installato come da istruzioni
3. La ventilazione del prodotto non e' adeguata
4. Il cliente ha problemi con i pagamenti, sia in forma parziale che totale.

FORO DI COMPETENZA

In qualunque caso di discrepanza o controversia, ambe le parti si dovranno riferire al foro di competenza dei Giudici e del Tribunale di Barcellona.

DIRITTO DI PROPRIETÀ

BENEITO FAURE si riserva il diritto e la proprietà di tutto il materiale che somministra fino al momento in cui il cliente finale abbia totalmente pagato il materiale stesso.

La merce si somministra sotto la riserva di propriertà di BENEITO FAURE fino al totale adempimento delle obbligazioni da parte del cliente.

Il cliente è obbligato a cooperare e adottare tutte le misure necessarie o convenienti e quelle proposte da BENEITO FAURE per salvaguardare la sua proprietà del prodotto.La riserva di proprietà persiste anche quando viene accettato e riconosciuto il credito del cliente da BENEITO FAURE o se si fosse stabilito un sistema di pagamento tra le parti. Le trasformazioni o i miglioramenti della merce sulla quale BENEITO FAURE ha la riserva di proprietà, non assegnano la proprietà al cliente o al manipolatore.In caso di unione, trasformazione e/o adesione dei prodotti sotto la di proprieta' di terzi sussisterà la riserva di proprietà in proporzione al valore che avevano i prodotti oggetto di riserva di proprietà prima dell'adesione. Il cliente potrà vendere i beni soggetti a riserva di proprietà nell'ambito dei suoi affari, sempre e quando non ci siano violazioni delle obbligazioni nei confronti di BENEITO FAURE.In tutti i casi quando si genera una rivendita di merce soggetta a diritto di proprietà, si genera automaticamente la cessazione a BENEITO FAURE dei crediti conseguenti alla rivendita in favore del venditore, cosi come si qualsiasi altro credito precedente, nel suo caso di indennizzo per perdita della cosa, responsabilità extra-contrattuale, ecc.Il cliente sarà obbligato  in questo caso a fornire a BENEITO FAURE tutte le informazioni e i documenti necessari per i reclami. BENEITO FAURE reclamerà, previa notifica del cliente in possesso della merce, essendo quest'ultimo obbligato  a fornirla. Se prima di effettuare il pagamento totale , la merce venduta fosse soggetta a qualsiasi tipo di sequestro o  blocco, il cliente sarà obbligato a dichiarare nel documento di sequestro che la merce è proprietà di BENEITO FAURE e se, indipendentemente da questo la merce fosse sequestrata, il cliente deve supportare BENEITO FAURE alla rivalsa del diritto di proprietà  le cui spese saranno a carico del cliente.

CONDICIONES GENERALES DE VENTA

BENEITO FAURE S.L se reserva el derecho a realizar las variaciones que considere oportunas a sus productos no siendo responsables de la posible información errada que aparezca en dicho catálogo.

TARIFA

Para cualquier tipo de pedido se aplicará la tarifa y condiciones vigentes en el momento de la recepción del pedido. La tarifa se enviará vía email a todos los clientes que se encuentren en la base de datos de BENEITO FAURE y será actualizada siempre que sea necesario. Los precios no incluyen IVA ni tasa de reciclaje.

PEDIDOS

Los pedidos deberán ser enviados vía email. No se cursará ningún pedido por teléfono o cualquier otra vía. Los presupuestos de material que se deba manipular a medida se enviarán al cliente para su aceptación y no se cursaran hasta recibir la copia firmada de la aceptación.

DEVOLUCIONES

Para realizar cualquier devolución se deberá solicitar la autorización previa a BENEITO FAURE. Deberá comunicarse el motivo de la devolución vía email indicando el nombre del cliente, fecha de compra, unidades y referencia del producto devuelto, motivo de la devolución y albarán de compra. La aceptación de la devolución no implica la aceptación definitiva de ésta. Dicha devolución solo será definitiva tras la consiguiente verificación y análisis del producto por parte de nuestro departamento técnico. Solo serán aceptadas las devoluciones de mercancía si ésta se encuentra en perfecto estado para su venta y en su embalaje original en buen estado, así como la etiqueta de embalaje. Las devoluciones no serán compensadas mediante un importe económico. La devolución de material podrá ser compensada mediante un pedido previo y con la autorización de BENEITO FAURE. No se aceptarán devoluciones de productos de fabricación especial o previamente manipulados por parte del departamento técnico bajo petición del cliente.

TRANSPORTE

Salvo que se acuerden otros términos de transporte, la mercancía viajará por cuenta de los comprados con las condiciones EXWORKS.
Así mismo, BENEITO FAURE ofrecerá un tiempo de entrega por cada territorio, siendo éste siempre aproximado. La empresa no se hará cargo de posibles alteraciones o demoras sobre éste tiempo producidas por causas externas a la empresa.

PLAZO DE ENTREGA

Los plazos y disponibilidad ofrecidos por BENEITO FAURE son siempre aproximados y pueden estar sujetos a variaciones. Éstas posibles variaciones en los plazos no supondrán la aceptación de la responsabilidad o penalizaciones por la demora por parte de BENEITO FAURE.

RECLAMACIONES

En el albarán del transportista deberá constar cualquier anomalía visible y, tras haber revisado el material, comunicar por escrito a nuestras oficinas la incidencia en las 24 horas siguientes a la recepción de la mercancía.
Superado este tiempo, la empresa no podrá hacerse cargo de la reclamación por no estar en el plazo por la agencia de transporte.
Para otro tipo de reclamaciones, deberá comunicarse por escrito a nuestras oficinas.
El producto que no funcione correctamente será repuesto por otro igual o que cumpla con las mismas características. En ningún caso nos haremos cargo de los costes de la mano de obra que se pueda originar por el mal funcionamiento de un producto de nuestro catálogo.

GARANTÍA

BENEITO FAURE garantiza que los productos que se venden se encuentran en perfecto estado. La garantía cubrirá la reparación o la reposición del producto (bajo decisión de BENEITO FAURE) y será necesario el previo envío de la incidencia por email. La garantía del producto se encuentra en el embalaje del mismo. El departamento técnico de BENEITO FAURE será el único autorizado para determinar si se trata de un defecto de fabricación, después de recibir por escrito la incidencia y la factura de venta para previa verificación. BENEITO FAURE basa el tiempo de garantía en los años desde que el producto fue comprado por el cliente, no en las horas de funcionamiento de éste.

La GARANTÍA no se cubrirá:
1. Si el producto ha sido previamente manipulado.
2. No se encuentra instalado según las instrucciones.
3. Si la ventilación del cuál no es la adecuada.
4. Problemas de pago parcial o en su totalidad por parte del cliente.

JURISDICCIÓN

En cualquier discrepancia o disputa, ambas partes se someterán a la jurisdicción de los Jueces y tribunales de Barcelona.

RESERVA DE LA PROPIEDAD

BENEITO FAURE se reserva el derecho a la propiedad de todos los materiales que suministre hasta que el comprador haya hecho efectivo el pago del total de los mismos.

Las mercancías pedidas se suministran bajo reserva de dominio en favor de BENEITO FAURE hasta el total cumplimiento de las obligaciones de pago del cliente.

El cliente queda obligado a cooperar y adoptar las medidas que sean necesarias y las que BENEITO FAURE le proponga para salvaguardar su propiedad sobre la mercancía. La reserva del dominio persiste incluso en el supuesto de que el cliente tuviera créditos aceptados y reconocidos contra BENEITO FAURE o se hubiera establecido un sistema de cuentas corrientes entre ambos. La transformación o mejora de la mercancía sobre la que BENEITO FAURE tiene reserva de dominio no otorga su propiedad al cliente o manipulador. En el supuesto de unión, transformación y/o accesión de los productos bajo la reserva de dominio a productos de terceros subsistirá la reserva de dominio en la proporción correspondiente al valor que tuvieran los productos objeto de reserva de dominio con anterioridad a la accesión. El cliente podrá vender los bienes sujetos a la reserva de dominio en el curso ordinario de sus negocios, siempre y cuando no haya incumplido sus obligaciones de pago frente a BENEITO FAURE. En todo caso al producirse una reventa de mercancías sujetas a reserva de dominio, se produce automáticamente la cesión a BENEITO FAURE de los créditos nacidos en consecuencia de dicha reventa en favor del vendedor, así como de cualesquiera otros créditos precedentes, en su caso de indemnizaciones por perdida de la cosa, responsabilidad extracontractual, etc. El cliente estará obligado en estos supuestos a facilitar a BENEITO FAURE toda la información y documentación necesaria para la reclamación de los créditos subrogados. En caso de incumplimiento por parte del cliente, y en particular, en el supuesto de retraso en los pagos o en caso de declaración de concurso del cliente, BENEITO FAURE reclamará, previa notificación al cliente, en posesión de las mercancías, estando obligado éste a entregárselas. Si antes de efectuado el total pago del precio, las mercancías vendidas fuesen objeto de cualquier embargo o traba, el cliente vendrá obligado a hacer constar expresamente en la diligencia del embargo, que las mercancías son prioridad de BENEITO FAURE y si, a pesar de esta manifestación, fuesen embargados, facilitará el ejercicio por parte de la BENEITO FAURE de la correspondiente acción de tercería de dominio, cuyos gastos correrán por parte del cliente.

# Alphabetical Index (Name - Page)


| | |
|---|---|
| Adn G4 | 685 |
| Air switch | 527 |
| Alfa | 321 |
| Alp 48V | 399 |
| Alp surface | 444 |
| Alp suspension | 430 |
| Alp suspension 48V | 399 |
| AR111 15° G53 | 675 |
| AR111 15° GU10 | 675 |
| Argo | 475 |
| Argo flat | 475 |
| Argo large | 475 |
| Aria 30W E27/E40 | 706 |
| Aria 50W E27/E40 | 706 |
| Ark recessed | 453 |
| Ark surface | 453 |
| Artis round | 603 |
| Artis square | 603 |
| Aston | 313 |
| Atmos 25 | 448 |
| Atmos 25 GU10 | 450 |
| Atmos 45 | 448 |
| Atmos 45 GU10 | 450 |
| Atmos slim 25 | 447 |
| Atmos slim 45 | 447 |
| Atmos track | 550 |
| Atom | 379 |
| Avant round | 655 |
| Avant square | 655 |
| Avant surface round | 655 |
| Bag | 507 |
| Basculante | 669 |
| Bathroom | 665 |
| Beam | 491 |
| Bimba | 509 |
| Bit | 551 |
| Blaber line | 151 |
| Blaber round | 155 |
| Blaber square | 153 |
| Blaber triangular | 157 |
| Blis rectangular | 585 |
| Blis round | 585 |
| Blis square | 585 |
| Bonn | 337 |
| Bora 48V | 397 |
| Bora 48V suspension | 397 |
| Bora recessed 4,5W | 440 |
| Bora recessed 8,5W | 440 |
| Bora surface 4,5W | 442 |
| Bora surface 8,5W | 442 |
| Bora suspension | 421 |
| Bora suspension recessed | 439 |
| Bora suspension surface | 439 |
| Bora XL suspension | 422 |
| BOX 10 | 181 |
| BOX 11 | 195 |
| BOX 12 | 192 |
| BOX 13 | 191 |
| BOX 14 | 186 |
| BOX 15 | 167 |
| BOX 16 | 166 |
| BOX 17 | 171 |
| BOX 18 | 169 |
| BOX 19 | 180 |
| BOX 21 | 202 |
| BOX 22 | 200 |
| BOX 23 | 172 |
| BOX 24 | 189 |
| BOX 27 | 203 |
| BOX 28 | 197 |
| BOX 29 | 208 |
| BOX 30 12mm | 209 |
| BOX 30 20mm | 209 |
| BOX 33 | 201 |
| BOX 35 | 176 |
| BOX 37 | 179 |
| BOX 38 | 177 |
| BOX 39 | 196 |
| BOX 53 | 173 |
| BOX 60 | 187 |
| BOX 65 | 205 |
| BOX 67 | 207 |
| BOX 68 | 175 |
| BOX 71 | 190 |
| BOX 73 | 193 |
| BOX 75 | 182 |
| BOX 95 | 183 |
| BOX 98 railing | 199 |
| BOX 99 | 185 |
| Caddie | 615 |
| Cala 10W G24 | 690 |
| Cala 9W G24 | 690 |
| Cam 110 | 567 |
| Cam 60 | 567 |
| Casambi mag. track control | 407 |
| Central corner connector | 409 |
| Circus | 113 |
| Clos 16W | 561 |
| Clos 16W base 30cm | 562 |
| Clos 16W base 60cm | 563 |
| Clos 8W | 561 |
| Clos 8W base 30cm | 562 |
| Clos 8W base 60cm | 563 |
| Comet | 565 |
| Compac round | 531 |
| Compac square | 531 |
| Concord dimmable | 469 |
| Control Basic | 282 |
| Control Casambi | 285 |
| Control Casambi | 286 |
| Control Dali Push | 288 |
| Control Dali Push Triac | 288 |
| Control DMX | 287 |
| Control Driver RF / Push | 289 |
| Control PMW / RF | 286 |
| Control Push / Triac | 288 |
| Control SPI | 287 |
| Control Top | 282 |
| Control Tuya | 283 |
| Converse lighting | 515 |
| Cookie 48V | 391 |
| Cookie suspension | 437 |
| Cookie suspension 48V | 391 |
| Cookie three phase track | 329 |
| Crown base | 309 |
| Crown track | 309 |
| Cup 45W E27/E40 | 707 |
| Curve line 48V | 388 |
| Curve magnet track surf. | 409 |
| Curve track end cap | 409 |
| Curve tram 48V | 388 |
| Dau | 105 |
| Dau E | 106 |
| Diro | 405 |
| Dis | 592 |
| Dole GU10 | 676 |
| Dot 48V | 395 |
| Dual | 77 |
| Eclipse | 667 |
| Egna | 647 |
| End cap | 331 |

End cap 553
End cap recessed 409
End cap surface 409
Esférica 5,5W dimmable 694
Esférica 5W E14/E27 694
Esférica 7W E14/E27 694
Evo 43
Evo dual 47
Evo E 53
Evo fly 45
Evo mini 49
Evo R 50
Evo track 51
Fade 617
Fijo 671
Filter 93
FINE 25 268
Fine 25 circle 48V 406
FINE 31 225
FINE 32 N 237
FINE 36 244
FINE 41 223
FINE 42 245
FINE 43 251
FINE 44 239
FINE 45 257
FINE 46 249
FINE 47 254
FINE 48 217
FINE 49 235
FINE 50 252
FINE 51 236
FINE 52 229
FINE 54 247
FINE 55 233
FINE 56 232
FINE 61 227
FINE 63 243
FINE 64 216
FINE 66 253
FINE 69 221
FINE 70 272
FINE 71 255
FINE 72 276
FINE 74 278
FINE 76 231
FINE 84 219
FINE 96 230
FINE DMX-4 264
FINE DMX-5 265
FINE running 259
FINE SPI-2 260
FINE SPI-3 261
FINE SPI-4 263
Fix 611
Flama dimmable E14 700
Flama E14/E27 700
Flash 141
Flexible joint track 331
Forest 79
Frame 1m 552
Frame 2m 552
Frame 3m 552
Front base 418
Gadir 577
Gam 641
Globo 10W E27 698
Globo 10W E27 dimmable 698
Globo 15W E27 699
Globo 16W E27 699
Globo 22W E27 699
Golf 200mm 376
Golf 400mm 376
Golf 600mm 377
Golf 800mm 377
Grip 99
Grow 502
Hat 48V 401
Hat recessed 455
Hat surface 455
Hook GU10 681
Hook GU10 dimmable 681
Horizon 139
HQI tubular E27 691
HQI tubular G12 691
HQI tubular RX7S 691
Ice 10 549
Ice 5 549
Icon 12W 483
Icon 7W 483
Ilo 501
Ina 592
Iris 649
Joint track spacing recessed 333
Joint track spacing surface 331
Joint track without spacing 331
Kaa 135
Kaa line 137
Kom 20W 317
Kom 30W 317
Kom 40W 317
Konic dimmable 315
Kora round 20W 519
Kora round 25W 519
Kora square 20W 520
Kora square 25W 520
Krion 300W 633
Krion 400W 633
Kubo 85
Kubo E 86
L Joint ceiling 553
L Joint ceiling recessed 409
L Joint ceiling surface 409
L Joint track recessed 333
L Joint track surface 331
L Joint wall ceiling 553
L Joint wall ceiling recessed 409
L Joint wall ceiling surface 409
Lao 497
Led strips accessories 292
Lek round 583
Lek square 583
Lena 311
Lievo suspension 433
Lievo switch 513
Lievo XL suspension 434
Line 48V 15W 387
Line 48V 30W 387
Line 48V 7,5W 387
Lineal 13W R7S 693
Lineal 9W R7S 693
Lineal 11W R7S dimmable 693
Lineal 5W R7S 692
Lineal 9W R7S 692
Lineal 9W R7S dimmable 692
Linear joint 553
Linear joint recessed 409
Linear joint surface 409
Lonja 301
Luk round IP20 663
Luk round IP65 663

# Alphabetical Index (Name - Page)


| | |
|---|---|
| Luk square IP65 | 663 |
| Luky | 597 |
| Luminaires accessories | 158 |
| Lynk G53 | 677 |
| Lynk GU10 | 677 |
| Lynk GU10 dimmable | 677 |
| Mac 30 | 555 |
| Mac 60 | 555 |
| Mac wall 120mm | 477 |
| Mac wall 180mm | 477 |
| Mac wall 250mm | 477 |
| Mac wall base | 557 |
| Madi | 637 |
| Magnet track accesories | 408 |
| Magnet track recessed | 409 |
| Magnet track surface | 409 |
| Max BA15d | 678 |
| Micro globo 6W E27 | 698 |
| Micro zoom | 375 |
| Micro zoom large | 375 |
| Mini comet | 565 |
| Mini concord dimmable | 470 |
| Mini oxo round 1 | 367 |
| Mini oxo square 1 | 367 |
| Mini oxo square 2 | 369 |
| Mini oxo square 4 | 369 |
| Mini oxo square 6 | 369 |
| Mini rubyc | 466 |
| Mini rubyc dimmable | 466 |
| Minimus | 103 |
| Mirrow | 89 |
| Mis round switch | 599 |
| Mis square switch | 600 |
| Motion Sensor | 289 |
| Nano alp suspension | 429 |
| Nano oxo round | 372 |
| Nano oxo square | 372 |
| Nano pulsar round | 358 |
| Nano pulsar r. gold trim | 360 |
| Nano pulsar round surface | 362 |
| Nano pulsar square | 358 |
| Nano pulsar s. gold trim | 360 |
| Nano pulsar square surface | 362 |
| Narrow GU10 dimmable | 683 |
| Neo | 569 |
| Neo sensor | 570 |
| Neo XL | 569 |
| Neo XL sensor | 570 |
| Nexus | 76 |
| Nik | 607 |
| Nitro GU10 | 676 |
| Nix | 591 |
| Noa 80W E27/E40 | 713 |
| Noa 85W E27/E40 | 713 |
| Noi dimmable | 529 |
| Noi switch | 529 |
| Nox | 335 |
| Nyneto | 101 |
| Obo 19W E27 | 708 |
| Obo 27W E27 | 708 |
| Obo 36W E27/E40 | 709 |
| Obo 45W E27/E40 | 709 |
| Oma | 495 |
| One recessed | 657 |
| One surface | 657 |
| One wall | 479 |
| One wall dual | 479 |
| Optic | 591 |
| Outdoor track | 553 |
| Oxo round dimmable | 365 |
| Oxo square dimmable | 365 |
| Par 30 E27 | 704 |
| Par 38 3.000K E27 | 704 |
| Par 38 Green E27 | 704 |
| Picolo AR111 base | 326 |
| Picolo AR111 track | 326 |
| Picolo base | 323 |
| Picolo GU10 base | 324 |
| Picolo GU10 track V3 | 324 |
| Picolo track | 323 |
| Pl T40 E27 | 689 |
| Plus | 473 |
| Polaris 100W | 631 |
| Polaris 150W | 631 |
| Polaris 200W | 631 |
| Polo | 595 |
| Popa 100 | 643 |
| Popa 60 | 643 |
| Port | 502 |
| Power GU10 | 679 |
| Power GU10 dimmable | 679 |
| Power MR16 | 679 |
| Power Supplies 48V | 408 |
| Power Supplies Basic | 290 |
| Power Supplies Dali-2 | 291 |
| Power Supp. Dali-2 / Push | 291 |
| Pow. S. Dali-2 DT-8 / Dim-CCT | 291 |
| Power Supplies Slim | 290 |
| Power Supplies Standard | 290 |
| Power Supplies Top | 290 |
| Power Supplies Triac | 291 |
| Prisma E14 | 688 |
| Proa | 644 |
| Pulcom asymmetric trim | 348 |
| Pulcom led | 348 |
| Pulcom round | 345 |
| Pulcom round asymmetric | 346 |
| Pulcom square | 345 |
| Pulcom square asymmetric | 346 |
| Pulcom surface accessory | 350 |
| Pulcom trim | 348 |
| Pulsar | 355 |
| Pulsar asymmetric trim | 356 |
| Pulsar matt gold trim | 356 |
| Pulsar surface accessory | 356 |
| Pulsar switch | 355 |
| Pun | 499 |
| Pure | 493 |
| PVC trim | 409 |
| R-39 E14 | 702 |
| R-50 E14 | 702 |
| R-63 E27 | 702 |
| R-63 s-line GU10 | 701 |
| R-80 E27 | 703 |
| R-90 2.200K E27 | 703 |
| R-90 3.000K E27 | 703 |
| RF Control for Tuya | 283 |
| Rok | 661 |
| Rubyc | 465 |
| Rubyc dimmable | 465 |
| Sair 10W | 613 |
| Sair 20W | 613 |
| Selen | 587 |
| Shop E14 | 688 |
| Side base | 416 |
| Sigma 17W | 573 |
| Sigma 3W | 573 |
| Signal | 575 |
| Sil E27 | 705 |
| Skin | 501 |
| Sky 100W | 629 |

| | |
|---|---|
| Sky 10W | 628 |
| Sky 150W | 629 |
| Sky 200W | 629 |
| Sky 20W | 628 |
| Sky 30W | 628 |
| Sky microwave sens. 10W | 626 |
| Sky microwave sens. 30W | 626 |
| Sky microwave sens. 50W | 626 |
| Sky switch 10W | 623 |
| Sky switch 20W | 623 |
| Sky switch 30W | 624 |
| Sky switch 40W | 624 |
| Sky with spike | 621 |
| Smile 20W E27 | 712 |
| Smile 40W E27 | 712 |
| Smile 60W E40 | 712 |
| Sono 40W | 303 |
| Sono 60W | 303 |
| Sphere 48V | 389 |
| Sphere alp wall | 487 |
| Sphere suspension 48V | 389 |
| Sphere wall | 487 |
| Square | 109 |
| Standard 10W dimmable | 697 |
| Standard 12W | 696 |
| Standard 12W dimmable | 697 |
| Standard 15W | 696 |
| Standard 17W dimmable | 697 |
| Standard 6W E27 | 695 |
| Standard 9W E27 | 695 |
| Start connector | 409 |
| Stem | 505 |
| Steps | 502 |
| Sunset round | 579 |
| Sunset square | 579 |
| Sunset XL | 581 |
| Sunset XL dual | 581 |
| Suspension kit | 331 |
| Suspension kit | 409 |
| Sweet usb-a | 489 |
| Sweet usb-c | 489 |
| System GU10 | 680 |
| System GU10 dimmable | 680 |
| System MR16 | 680 |
| T Joint track recessed | 333 |
| T Joint track surface | 331 |
| Tao | 343 |
| Tax | 91 |
| Thessis 15W | 523 |
| Thessis 15W dimmable | 524 |
| Thessis 25W | 523 |
| Thessis 25W dimmable | 524 |
| Thessis 35W | 523 |
| Three phase adapter | 331 |
| Three phase recessed base | 333 |
| Three phase surface base | 331 |
| Three phase track recessed | 333 |
| Three phase track surface | 331 |
| Time | 73 |
| Time E | 74 |
| Time track | 83 |
| Time wall sensor | 81 |
| Tot 40W | 463 |
| Tot 60W | 463 |
| Track ceiling recessed | 333 |
| Track ceiling surface | 331 |
| Track power sup. recessed | 333 |
| Track power sup. surface | 331 |
| Tram 20W | 319 |
| Tram 30W | 319 |
| Tram 48V 4,5W | 385 |
| Tram 48V 9W | 385 |
| Tram recessed 10 | 340 |
| Tram recessed 2 | 339 |
| Tram recessed 5 | 339 |
| Tram recesssed 15 | 340 |
| Triton | 143 |
| Triton down | 147 |
| Tron | 485 |
| Tubi | 95 |
| Tubi wall | 97 |
| Tundra | 115 |
| Tura 30 | 559 |
| Tura 60 | 559 |
| Tutto GU10 | 684 |
| Tutto MR11 | 684 |
| Tween recessed | 605 |
| Tween surface | 605 |
| Ufo 300W | 545 |
| Ufo Lens Dali | 538 - 539 |
| Ufo Lens switch | 534 - 535 |
| Uniform-line G4 | 686 |
| Uniform-line G9 | 687 |
| Uniform-line GU10 | 682 |
| Uniform-line long G4 | 686 |
| Uniform-line long G9 | 687 |
| Uniform-line MR16 | 682 |
| Urban | 55 |
| Urban asymmetric | 64 |
| Urban E | 56 |
| Urban fly | 60 |
| Urban market | 70 |
| Urban track | 68 |
| Urban train | 58 |
| Urban wall sensor | 62 |
| Urban work | 61 |
| Visor | 609 |
| Visor solar | 651 |
| Volt round 1 | 457 |
| Volt round 1 GU10 | 460 |
| Volt round 3 | 458 |
| Volt round 3 GU10 | 461 |
| Volt round 48V | 403 |
| Volt square 1 | 457 |
| Volt square 1 GU10 | 460 |
| Volt square 3 | 458 |
| Volt square 3 GU10 | 461 |
| Volt square 48V | 403 |
| Waterproof silicone cover | 553 |
| Wech | 635 |
| X Joint track recessed | 333 |
| X Joint track surface | 331 |
| Zas round | 619 |
| Zas square | 619 |
| Zero design | 126 |
| Zero direct | 123 |
| Zero dual | 133 |
| Zero in | 111 |
| Zero out | 117 |
| Zero XL | 119 |
| Zibor | 589 |
| Zio recessed | 659 |
| Zio surface | 659 |
| Zio wall | 481 |
| Zio wall dual | 481 |
| Zoe 48V | 400 |
| Zoe recessed | 445 |
| Zoe surface | 445 |
| Zoe suspension | 425 |
| Zoe XL suspension | 426 |
| Zoom | 305 |

# Numerical Index (Code - Page)


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 3364 | 331 | 3521 | 699 | 3754 | 567 | 3919 | 709 |
| 3365 | 331 | 3522 | 699 | 3757 | 577 | 3920 | 709 |
| 3366 | 331 | 3523 | 699 | 3758 | 577 | 3921 | 709 |
| 3367 | 331 | 3524 | 698 | 3795 | 331 | 3922 | 709 |
| 3368 | 331 | 3525 | 698 | 3796 | 331 | 3923 | 709 |
| 3369 | 331 | 3526 | 698 | 3805 | 333 | 3924 | 709 |
| 3370 | 331 | 3527 | 697 | 3851 | 333 | 3925 | 712 |
| 3372 | 331 | 3528 | 697 | 3852 | 333 | 3926 | 712 |
| 3373 | 331 | 3529 | 697 | 3854 | 706 | 3927 | 712 |
| 3438 | 679 | 3530 | 697 | 3855 | 706 | 3929 | 609 |
| 3441 | 679 | 3531 | 644 | 3856 | 706 | 3931 | 609 |
| 3442 | 679 | 3532 | 644 | 3857 | 706 | 3942 | 343 |
| 3443 | 679 | 3534 | 700 | 3858 | 706 | 3943 | 343 |
| 3444 | 684 | 3569 | 678 | 3859 | 706 | 3944 | 343 |
| 3445 | 684 | 3570 | 691 | 3860 | 706 | 3945 | 343 |
| 3446 | 684 | 3571 | 691 | 3861 | 706 | 3948 | 531 |
| 3447 | 684 | 3579 | 704 | 3881 | 698 | 3949 | 531 |
| 3448 | 684 | 3580 | 617 | 3882 | 643 | 3950 | 531 |
| 3449 | 684 | 3581 | 615 | 3883 | 643 | 3951 | 531 |
| 3450 | 688 | 3582 | 570 | 3884 | 643 | 3952 | 531 |
| 3452 | 677 | 3583 | 570 | 3885 | 643 | 3953 | 531 |
| 3453 | 677 | 3584 | 570 | 3886 | 570 | 3955 | 629 |
| 3454 | 677 | 3585 | 570 | 3887 | 570 | 3956 | 629 |
| 3455 | 677 | 3586 | 567 | 3888 | 570 | 3957 | 629 |
| 3456 | 677 | 3587 | 647 | 3889 | 570 | 3965 | 713 |
| 3457 | 677 | 3589 | 577 | 3890 | 569 | 3972 | 545 |
| 3458 | 331 | 3590 | 567 | 3891 | 569 | 3983 | 583 |
| 3459 | 331 | 3592 | 647 | 3892 | 569 | 3984 | 583 |
| 3464 | 677 | 3593 | 577 | 3893 | 569 | 3985 | 583 |
| 3465 | 677 | 3614 | 331 | 3897 | 333 | 3986 | 583 |
| 3466 | 677 | 3615 | 331 | 3898 | 333 | 3987 | 583 |
| 3467 | 676 | 3616 | 331 | 3900 | 713 | 3988 | 583 |
| 3468 | 676 | 3617 | 331 | 3901 | 713 | 3995 | 595 |
| 3469 | 676 | 3618 | 331 | 3902 | 713 | 3996 | 595 |
| 3470 | 676 | 3619 | 331 | 3903 | 713 | 3997 | 595 |
| 3477 | 693 | 3620 | 331 | 3904 | 693 | 3998 | 595 |
| 3478 | 693 | 3621 | 331 | 3905 | 693 | 3999 | 597 |
| 3485 | 529 | 3622 | 331 | 3906 | 693 | 4000 | 597 |
| 3486 | 529 | 3623 | 331 | 3909 | 708 | 4001 | 597 |
| 3489 | 679 | 3625 | 331 | 3910 | 708 | 4002 | 597 |
| 3490 | 679 | 3747 | 569 | 3911 | 709 | 4003 | 701 |
| 3491 | 679 | 3748 | 569 | 3912 | 709 | 4023 | 681 |
| 3496 | 649 | 3749 | 569 | 3913 | 712 | 4024 | 681 |
| 3497 | 649 | 3750 | 569 | 3914 | 712 | 4025 | 681 |
| 3518 | 699 | 3751 | 567 | 3915 | 712 | 4038 | 321 |
| 3519 | 699 | 3752 | 567 | 3917 | 708 | 4039 | 321 |
| 3520 | 699 | 3753 | 567 | 3918 | 708 | 4040 | 321 |

| | |
|---|---|
| 4049 | 324 |
| 4050 | 324 |
| 4096 | 337 |
| 4097 | 337 |
| 4098 | 337 |
| 4099 | 337 |
| 4106 | 502 |
| 4107 | 502 |
| 4108 | 501 |
| 4109 | 501 |
| 4110 | 502 |
| 4111 | 502 |
| 4112 | 502 |
| 4113 | 502 |
| 4126 | 501 |
| 4127 | 501 |
| 4134 | 619 |
| 4135 | 573 |
| 4137 | 703 |
| 4175 | 489 |
| 4176 | 321 |
| 4177 | 321 |
| 4178 | 321 |
| 4193 | 651 |
| 4194 | 651 |
| 4209 | 651 |
| 4217 | 355 |
| 4218 | 355 |
| 4227 | 682 |
| 4228 | 682 |
| 4229 | 682 |
| 4236 | 523 |
| 4243 | 694 |
| 4244 | 694 |
| 4245 | 694 |
| 4246 | 694 |
| 4247 | 694 |
| 4248 | 694 |
| 4249 | 694 |
| 4250 | 694 |
| 4251 | 573 |
| 4254 | 628 |
| 4257 | 628 |
| 4266 | 628 |
| 4276 | 628 |
| 4279 | 628 |
| 4280 | 628 |
| 4290 | 575 |
| 4291 | 607 |
| 4292 | 607 |
| 4295 | 679 |
| 4296 | 679 |
| 4297 | 358 |
| 4298 | 358 |
| 4299 | 358 |
| 4300 | 358 |
| 4301 | 358 |
| 4302 | 358 |
| 4303 | 583 |
| 4304 | 583 |
| 4308 | 626 |
| 4309 | 626 |
| 4310 | 626 |
| 4311 | 626 |
| 4312 | 583 |
| 4331 | 591 |
| 4333 | 466 |
| 4337 | 317 |
| 4339 | 317 |
| 4340 | 621 |
| 4341 | 621 |
| 4349 | 626 |
| 4350 | 626 |
| 4351 | 626 |
| 4352 | 626 |
| 4353 | 626 |
| 4354 | 626 |
| 4355 | 626 |
| 4356 | 626 |
| 4362 | 331 |
| 4363 | 331 |
| 4364 | 331 |
| 4365 | 331 |
| 4367 | 592 |
| 4368 | 592 |
| 4369 | 591 |
| 4383 | 483 |
| 4384 | 483 |
| 4385 | 483 |
| 4386 | 483 |
| 4387 | 483 |
| 4388 | 483 |
| 4401 | 628 |
| 4402 | 628 |
| 4410 | 362 |
| 4411 | 362 |
| 4412 | 362 |
| 4413 | 362 |
| 4427 | 319 |
| 4428 | 319 |
| 4429 | 319 |
| 4430 | 319 |
| 4433 | 326 |
| 4435 | 326 |
| 4437 | 323 |
| 4438 | 323 |
| 4439 | 313 |
| 4440 | 313 |
| 4444 | 317 |
| 4445 | 317 |
| 4447 | 317 |
| 4448 | 317 |
| 4451 | 358 |
| 4452 | 358 |
| 4453 | 358 |
| 4454 | 358 |
| 4455 | 358 |
| 4456 | 358 |
| 4461 | 448 |
| 4462 | 448 |
| 4463 | 448 |
| 4464 | 448 |
| 4465 | 450 |
| 4466 | 450 |
| 4467 | 450 |
| 4468 | 450 |
| 4476 | 659 |
| 4477 | 659 |
| 4478 | 657 |
| 4479 | 657 |
| 4480 | 657 |
| 4481 | 657 |
| 4482 | 659 |
| 4483 | 659 |
| 4484 | 655 |
| 4485 | 655 |
| 4486 | 655 |
| 4487 | 655 |
| 4509 | 633 |
| 4510 | 633 |
| 4511 | 633 |
| 4512 | 633 |
| 4513 | 631 |
| 4514 | 631 |
| 4515 | 631 |
| 4516 | 631 |
| 4517 | 631 |
| 4518 | 631 |
| 4519 | 631 |
| 4520 | 631 |
| 4521 | 631 |
| 4522 | 473 |
| 4523 | 473 |
| 4541 | 319 |
| 4542 | 319 |
| 4543 | 319 |
| 4544 | 319 |
| 4549 | 372 |
| 4550 | 372 |
| 4551 | 372 |
| 4552 | 372 |
| 4573 | 397 |
| 4574 | 397 |
| 4575 | 397 |
| 4576 | 397 |
| 4577 | 397 |
| 4578 | 397 |
| 4579 | 397 |
| 4580 | 397 |
| 4581 | 397 |
| 4582 | 397 |
| 4583 | 397 |
| 4584 | 397 |
| 4585 | 397 |
| 4586 | 397 |
| 4587 | 397 |
| 4588 | 397 |
| 4589 | 440 |
| 4590 | 440 |
| 4591 | 440 |
| 4592 | 440 |
| 4593 | 440 |
| 4594 | 440 |
| 4595 | 440 |
| 4596 | 440 |
| 4597 | 440 |
| 4598 | 440 |
| 4599 | 440 |

# Numerical Index (Code - Page)


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 4600 | 440 | 4648 | 409 | 4710 | 567 | 4781 | 385 |
| 4601 | 440 | 4649 | 409 | 4711 | 408 | 4782 | 385 |
| 4602 | 440 | 4650 | 409 | 4731 | 339 | 4783 | 385 |
| 4603 | 440 | 4651 | 409 | 4732 | 339 | 4784 | 387 |
| 4604 | 440 | 4652 | 409 | 4733 | 339 | 4785 | 387 |
| 4605 | 439 | 4653 | 409 | 4734 | 339 | 4786 | 387 |
| 4606 | 439 | 4654 | 409 | 4735 | 340 | 4787 | 399 |
| 4607 | 439 | 4655 | 409 | 4736 | 340 | 4788 | 399 |
| 4608 | 439 | 4657 | 409 | 4737 | 340 | 4789 | 399 |
| 4609 | 439 | 4658 | 409 | 4738 | 340 | 4790 | 399 |
| 4610 | 439 | 4659 | 409 | 4742 | 345 | 4791 | 399 |
| 4611 | 439 | 4660 | 409 | 4743 | 346 | 4792 | 399 |
| 4612 | 439 | 4661 | 409 | 4744 | 345 | 4793 | 399 |
| 4613 | 439 | 4662 | 409 | 4745 | 346 | 4794 | 399 |
| 4614 | 439 | 4663 | 409 | 4746 | 345 | 4795 | 400 |
| 4615 | 439 | 4664 | 409 | 4747 | 346 | 4796 | 400 |
| 4616 | 439 | 4665 | 409 | 4748 | 345 | 4797 | 400 |
| 4617 | 439 | 4666 | 409 | 4749 | 346 | 4798 | 400 |
| 4618 | 439 | 4667 | 587 | 4750 | 447 | 4799 | 445 |
| 4619 | 439 | 4668 | 587 | 4751 | 447 | 4800 | 445 |
| 4621 | 442 | 4669 | 589 | 4752 | 447 | 4801 | 445 |
| 4622 | 442 | 4670 | 589 | 4753 | 333 | 4802 | 445 |
| 4623 | 442 | 4671 | 683 | 4754 | 333 | 4803 | 445 |
| 4624 | 442 | 4672 | 683 | 4755 | 661 | 4804 | 445 |
| 4625 | 442 | 4677 | 699 | 4756 | 661 | 4805 | 445 |
| 4626 | 442 | 4678 | 699 | 4757 | 661 | 4806 | 445 |
| 4627 | 442 | 4679 | 623 | 4758 | 663 | 4807 | 409 |
| 4628 | 442 | 4680 | 623 | 4759 | 663 | 4808 | 453 |
| 4629 | 442 | 4681 | 623 | 4761 | 348 | 4809 | 453 |
| 4630 | 442 | 4682 | 623 | 4762 | 348 | 4810 | 453 |
| 4631 | 442 | 4683 | 623 | 4763 | 348 | 4811 | 453 |
| 4632 | 442 | 4684 | 623 | 4764 | 348 | 4812 | 453 |
| 4633 | 442 | 4685 | 624 | 4766 | 523 | 4813 | 453 |
| 4634 | 442 | 4686 | 624 | 4767 | 524 | 4814 | 453 |
| 4635 | 442 | 4687 | 624 | 4768 | 395 | 4815 | 453 |
| 4636 | 442 | 4688 | 624 | 4769 | 395 | 4816 | 453 |
| 4637 | 409 | 4689 | 624 | 4770 | 395 | 4817 | 453 |
| 4638 | 409 | 4690 | 619 | 4771 | 395 | 4818 | 453 |
| 4639 | 409 | 4691 | 524 | 4772 | 391 | 4819 | 453 |
| 4640 | 409 | 4692 | 619 | 4773 | 391 | 4820 | 611 |
| 4641 | 409 | 4693 | 619 | 4774 | 391 | 4821 | 348 |
| 4642 | 409 | 4694 | 624 | 4775 | 391 | 4822 | 348 |
| 4643 | 409 | 4700 | 331 | 4776 | 385 | 4823 | 348 |
| 4644 | 409 | 4701 | 331 | 4777 | 385 | 4824 | 348 |
| 4645 | 409 | 4707 | 408 | 4778 | 385 | 4825 | 348 |
| 4646 | 409 | 4708 | 408 | 4779 | 385 | 4826 | 348 |
| 4647 | 409 | 4709 | 567 | 4780 | 385 | 4827 | 587 |

| | |
|---|---|
| 4828 | 587 |
| 4829 | 589 |
| 4830 | 589 |
| 4831 | 520 |
| 4832 | 519 |
| 4833 | 323 |
| 4834 | 323 |
| 4837 | 555 |
| 4838 | 555 |
| 4839 | 555 |
| 4840 | 555 |
| 4841 | 555 |
| 4842 | 555 |
| 4843 | 555 |
| 4844 | 555 |
| 4845 | 555 |
| 4846 | 555 |
| 4847 | 555 |
| 4848 | 555 |
| 4849 | 559 |
| 4850 | 559 |
| 4851 | 559 |
| 4852 | 559 |
| 4853 | 559 |
| 4854 | 559 |
| 4855 | 559 |
| 4856 | 559 |
| 4857 | 559 |
| 4858 | 559 |
| 4859 | 559 |
| 4860 | 559 |
| 4876 | 561 |
| 4877 | 561 |
| 4878 | 561 |
| 4879 | 561 |
| 4880 | 561 |
| 4881 | 561 |
| 4882 | 562 |
| 4883 | 562 |
| 4884 | 562 |
| 4885 | 563 |
| 4886 | 563 |
| 4887 | 563 |
| 4888 | 562 |
| 4889 | 562 |
| 4890 | 562 |
| 4891 | 563 |
| 4892 | 563 |
| 4893 | 563 |
| 4894 | 613 |
| 4895 | 613 |
| 4896 | 613 |
| 4897 | 613 |
| 4898 | 613 |
| 4899 | 613 |
| 4900 | 305 |
| 4901 | 305 |
| 4902 | 463 |
| 4903 | 463 |
| 4904 | 463 |
| 4905 | 463 |
| 4906 | 583 |
| 4907 | 583 |
| 4908 | 583 |
| 4909 | 583 |
| 4910 | 583 |
| 4911 | 583 |
| 4912 | 583 |
| 4913 | 583 |
| 4914 | 583 |
| 4915 | 538 |
| 4916 | 538 |
| 4917 | 538 |
| 4918 | 538 |
| 4919 | 539 |
| 4920 | 539 |
| 4921 | 539 |
| 4922 | 619 |
| 4923 | 615 |
| 4924 | 617 |
| 4930 | 447 |
| 4931 | 447 |
| 4932 | 447 |
| 4933 | 655 |
| 4934 | 655 |
| 4935 | 348 |
| 4946 | 303 |
| 4947 | 303 |
| 4950 | 303 |
| 4951 | 303 |
| 4952 | 448 |
| 4953 | 448 |
| 4954 | 450 |
| 4955 | 450 |
| 4957 | 585 |
| 4958 | 585 |
| 4959 | 585 |
| 4960 | 585 |
| 4961 | 585 |
| 4962 | 585 |
| 4963 | 333 |
| 4964 | 333 |
| 4965 | 333 |
| 4966 | 333 |
| 4967 | 333 |
| 4968 | 333 |
| 4969 | 333 |
| 4970 | 333 |
| 4971 | 333 |
| 4972 | 333 |
| 4973 | 333 |
| 4974 | 333 |
| 4975 | 333 |
| 4976 | 333 |
| 4977 | 333 |
| 4978 | 333 |
| 4979 | 505 |
| 4981 | 505 |
| 4982 | 585 |
| 4983 | 585 |
| 4984 | 585 |
| 4985 | 315 |
| 4986 | 315 |
| 4987 | 523 |
| 4988 | 523 |
| 4989 | 579 |
| 4990 | 579 |
| 4991 | 579 |
| 4992 | 579 |
| 4993 | 579 |
| 4994 | 579 |
| 4995 | 477 |
| 4996 | 477 |
| 4997 | 477 |
| 4998 | 477 |
| 4999 | 477 |
| 5000 | 477 |
| 5001 | 477 |
| 5002 | 477 |
| 5003 | 477 |
| 5004 | 635 |
| 5005 | 635 |
| 5006 | 479 |
| 5007 | 479 |
| 5008 | 479 |
| 5009 | 479 |
| 5010 | 479 |
| 5011 | 479 |
| 5012 | 481 |
| 5013 | 481 |
| 5014 | 481 |
| 5015 | 481 |
| 5016 | 481 |
| 5017 | 481 |
| 5018 | 527 |
| 5019 | 529 |
| 5020 | 599 |
| 5021 | 599 |
| 5022 | 599 |
| 5023 | 600 |
| 5024 | 600 |
| 5025 | 600 |
| 5026 | 356 |
| 5027 | 497 |
| 5028 | 603 |
| 5029 | 499 |
| 5030 | 523 |
| 5034 | 350 |
| 5035 | 350 |
| 5036 | 350 |
| 5037 | 403 |
| 5038 | 403 |
| 5039 | 403 |
| 5040 | 403 |
| 5041 | 457 |
| 5042 | 457 |
| 5043 | 457 |
| 5044 | 457 |
| 5045 | 458 |
| 5046 | 458 |
| 5047 | 458 |
| 5048 | 458 |
| 5049 | 460 |
| 5050 | 460 |
| 5051 | 460 |
| 5052 | 460 |
| 5053 | 461 |
| 5054 | 461 |

# Numerical Index (Code - Page)


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 5055 | 461 | 5148 | 534 | 5219 | 477 | 5285 | 376 |
| 5056 | 461 | 5149 | 535 | 5220 | 477 | 5286 | 376 |
| 5057 | 355 | 5150 | 535 | 5221 | 309 | 5287 | 376 |
| 5058 | 355 | 5154 | 637 | 5222 | 309 | 5288 | 376 |
| 5059 | 356 | 5155 | 489 | 5224 | 309 | 5289 | 376 |
| 5060 | 356 | 5156 | 489 | 5225 | 309 | 5290 | 376 |
| 5061 | 367 | 5157 | 491 | 5238 | 405 | 5291 | 376 |
| 5062 | 367 | 5158 | 491 | 5239 | 405 | 5292 | 376 |
| 5063 | 369 | 5159 | 493 | 5246 | 475 | 5293 | 376 |
| 5064 | 369 | 5160 | 493 | 5247 | 475 | 5294 | 376 |
| 5065 | 369 | 5178 | 641 | 5248 | 475 | 5295 | 376 |
| 5066 | 369 | 5179 | 329 | 5249 | 475 | 5296 | 376 |
| 5067 | 369 | 5180 | 329 | 5250 | 475 | 5297 | 377 |
| 5068 | 369 | 5181 | 391 | 5251 | 475 | 5298 | 377 |
| 5069 | 465 | 5182 | 391 | 5252 | 475 | 5299 | 377 |
| 5070 | 465 | 5183 | 437 | 5253 | 475 | 5300 | 377 |
| 5071 | 469 | 5184 | 437 | 5254 | 475 | 5301 | 377 |
| 5072 | 469 | 5185 | 391 | 5255 | 475 | 5302 | 377 |
| 5073 | 565 | 5186 | 391 | 5256 | 475 | 5303 | 377 |
| 5074 | 565 | 5187 | 675 | 5257 | 475 | 5304 | 377 |
| 5075 | 565 | 5188 | 675 | 5258 | 475 | 5305 | 377 |
| 5076 | 565 | 5189 | 675 | 5259 | 475 | 5306 | 377 |
| 5084 | 421 | 5190 | 675 | 5260 | 475 | 5307 | 377 |
| 5085 | 421 | 5191 | 675 | 5261 | 475 | 5308 | 377 |
| 5086 | 422 | 5192 | 675 | 5262 | 475 | 5309 | 388 |
| 5087 | 422 | 5196 | 605 | 5263 | 475 | 5310 | 388 |
| 5088 | 433 | 5197 | 605 | 5264 | 557 | 5311 | 388 |
| 5089 | 433 | 5198 | 605 | 5265 | 557 | 5312 | 388 |
| 5090 | 434 | 5199 | 605 | 5266 | 557 | 5313 | 388 |
| 5091 | 434 | 5200 | 605 | 5267 | 379 | 5314 | 388 |
| 5092 | 425 | 5201 | 605 | 5268 | 379 | 5315 | 388 |
| 5093 | 425 | 5202 | 387 | 5269 | 379 | 5316 | 388 |
| 5094 | 426 | 5203 | 387 | 5270 | 379 | 5317 | 409 |
| 5095 | 426 | 5204 | 387 | 5271 | 379 | 5319 | 409 |
| 5096 | 429 | 5205 | 603 | 5272 | 379 | 5325 | 509 |
| 5097 | 429 | 5207 | 356 | 5273 | 375 | 5326 | 509 |
| 5098 | 430 | 5208 | 360 | 5274 | 375 | 5327 | 509 |
| 5099 | 430 | 5209 | 360 | 5275 | 375 | 5328 | 509 |
| 5108 | 367 | 5210 | 360 | 5276 | 375 | 5329 | 507 |
| 5109 | 367 | 5211 | 360 | 5277 | 375 | 5330 | 507 |
| 5110 | 356 | 5212 | 356 | 5278 | 375 | 5331 | 507 |
| 5111 | 356 | 5213 | 356 | 5279 | 375 | 5332 | 507 |
| 5112 | 565 | 5214 | 663 | 5280 | 375 | 5333 | 487 |
| 5113 | 565 | 5215 | 663 | 5281 | 375 | 5334 | 487 |
| 5139 | 408 | 5216 | 663 | 5282 | 375 | 5336 | 487 |
| 5140 | 408 | 5217 | 663 | 5283 | 375 | 5337 | 487 |
| 5147 | 534 | 5218 | 477 | 5284 | 375 | 5339 | 487 |

| | |
|---|---|
| 5340 | 487 |
| 5342 | 487 |
| 5343 | 487 |
| 5345 | 455 |
| 5346 | 455 |
| 5348 | 455 |
| 5349 | 455 |
| 5351 | 455 |
| 5352 | 455 |
| 5354 | 455 |
| 5355 | 455 |
| 5357 | 444 |
| 5358 | 444 |
| 5360 | 444 |
| 5361 | 444 |
| 5363 | 401 |
| 5364 | 401 |
| 5366 | 401 |
| 5367 | 401 |
| 5369 | 389 |
| 5370 | 389 |
| 5372 | 389 |
| 5373 | 389 |
| 5375 | 389 |
| 5376 | 389 |
| 5378 | 389 |
| 5379 | 389 |
| 5381 | 495 |
| 5382 | 495 |
| 5383 | 495 |
| 5384 | 549 |
| 5385 | 549 |
| 5386 | 549 |
| 5387 | 549 |
| 5388 | 549 |
| 5389 | 549 |
| 5390 | 549 |
| 5391 | 549 |
| 5392 | 550 |
| 5393 | 550 |
| 5394 | 550 |
| 5395 | 550 |
| 5396 | 551 |
| 5397 | 551 |
| 5398 | 551 |
| 5399 | 551 |
| 5400 | 552 |
| 5401 | 552 |
| 5402 | 552 |
| 5403 | 552 |
| 5404 | 552 |
| 5405 | 552 |
| 5406 | 553 |
| 5407 | 553 |
| 5408 | 553 |
| 5409 | 553 |
| 5410 | 553 |
| 5411 | 553 |
| 5412 | 553 |
| 5413 | 553 |
| 5414 | 553 |
| 5415 | 553 |
| 5416 | 553 |
| 5417 | 553 |
| 5418 | 553 |
| 5419 | 581 |
| 5420 | 581 |
| 5421 | 581 |
| 5422 | 581 |
| 5423 | 581 |
| 5424 | 581 |
| 5425 | 553 |
| 5426 | 553 |
| 5427 | 409 |
| 5428 | 409 |
| 5431 | 406 |
| 5432 | 406 |
| 5441 | 406 |
| 5442 | 406 |
| 6023 | 408 |
| 6024 | 408 |
| 6025 | 408 |
| 6721 | 407 |
| 6722 | 407 |
| 10119 | 181 |
| 10121 | 181 |
| 10122 | 181 |
| 11119 | 195 |
| 12119 | 192 |
| 13113 | 191 |
| 14119 | 186 |
| 14121 | 186 |
| 14122 | 186 |
| 16119 | 166 |
| 16121 | 166 |
| 16122 | 166 |
| 17119 | 171 |
| 17121 | 171 |
| 17122 | 171 |
| 18119 | 169 |
| 18121 | 169 |
| 18122 | 169 |
| 19119 | 180 |
| 19121 | 180 |
| 19122 | 180 |
| 21119 | 202 |
| 21121 | 202 |
| 22119 | 200 |
| 22122 | 200 |
| 22410 | 290 |
| 22415 | 290 |
| 22420 | 290 |
| 22424 | 290 |
| 22430 | 290 |
| 22432 | 290 |
| 22435 | 290 |
| 22460 | 290 |
| 22490 | 288 |
| 22499 | 288 |
| 22570 | 283 |
| 22726 | 286 |
| 22726 | 288 |
| 22799 | 286 |
| 22821 | 283 |
| 22856 | 283 |
| 22911 | 289 |
| 22948 | 288 |
| 22974 | 289 |
| 23119 | 172 |
| 23121 | 172 |
| 23122 | 172 |
| 24108 | 291 |
| 24109 | 291 |
| 24119 | 189 |
| 24121 | 189 |
| 24122 | 189 |
| 24159 | 291 |
| 24208 | 291 |
| 24308 | 291 |
| 24309 | 291 |
| 24609 | 291 |
| 24758 | 291 |
| 25247 | 268 |
| 25277 | 268 |
| 25307 | 268 |
| 25367 | 268 |
| 25407 | 268 |
| 25467 | 268 |
| 27119 | 203 |
| 27121 | 203 |
| 27122 | 203 |
| 28119 | 197 |
| 29119 | 208 |
| 30129 | 209 |
| 30209 | 209 |
| 31220 | 225 |
| 31227 | 225 |
| 31270 | 225 |
| 31277 | 225 |
| 31300 | 225 |
| 31307 | 225 |
| 31400 | 225 |
| 31407 | 225 |
| 33119 | 201 |
| 33121 | 201 |
| 33122 | 201 |
| 35119 | 176 |
| 35121 | 176 |
| 35122 | 176 |
| 36360 | 244 |
| 37121 | 179 |
| 38119 | 177 |
| 38121 | 177 |
| 38122 | 177 |
| 39122 | 196 |
| 41270 | 223 |
| 41275 | 223 |
| 41300 | 223 |
| 41305 | 223 |
| 41400 | 223 |
| 41405 | 223 |
| 41600 | 223 |
| 41605 | 223 |
| 42360 | 245 |
| 42365 | 245 |
| 43430 | 251 |
| 44110 | 239 |
| 44270 | 239 |

# Numerical Index (Code - Page)


| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 44370 | 239 | 56360 | 232 | 64453 | 291 | 77019 | 282 | 92473 | 287 |
| 44500 | 239 | 56400 | 232 | 64458 | 291 | 79430 | 282 | 92553 | 287 |
| 45220 | 257 | 57241 | 285 | 64803 | 291 | 80260 | 282 | 92699 | 287 |
| 45227 | 257 | 57242 | 285 | 64808 | 291 | 81990 | 282 | 92853 | 287 |
| 45310 | 257 | 57588 | 286 | 65119 | 205 | 82995 | 282 | 93470 | 287 |
| 45317 | 257 | 57924 | 286 | 65121 | 205 | 83475 | 282 | 93579 | 287 |
| 45520 | 257 | 59112 | 285 | 65122 | 205 | 84270 | 219 | 95119 | 183 |
| 45527 | 257 | 59121 | 285 | 66470 | 253 | 84275 | 219 | 95121 | 183 |
| 46460 | 249 | 59122 | 285 | 66477 | 253 | 84300 | 219 | 95122 | 183 |
| 46465 | 249 | 59141 | 285 | 67122 | 207 | 84305 | 219 | 95153 | 287 |
| 47430 | 254 | 59142 | 285 | 68121 | 175 | 84400 | 219 | 95179 | 287 |
| 47440 | 254 | 59182 | 285 | 68122 | 175 | 84405 | 219 | 95479 | 287 |
| 48220 | 217 | 59189 | 285 | 69220 | 221 | 84431 | 288 | 96009 | 287 |
| 48270 | 217 | 59249 | 286 | 69225 | 221 | 84600 | 219 | 96307 | 230 |
| 48300 | 217 | 59519 | 286 | 69270 | 221 | 84605 | 219 | 96407 | 230 |
| 48400 | 217 | 59549 | 286 | 69275 | 221 | 85120 | 289 | 96477 | 230 |
| 49270 | 235 | 59629 | 286 | 69300 | 221 | 85183 | 289 | 98121 | 199 |
| 49300 | 235 | 59682 | 285 | 69305 | 221 | 85220 | 289 | 98122 | 199 |
| 49400 | 235 | 59689 | 285 | 69400 | 221 | 85263 | 289 | 99121 | 185 |
| 49600 | 235 | 59733 | 286 | 69405 | 221 | 85330 | 289 | 99122 | 185 |
| 50460 | 252 | 59739 | 286 | 69600 | 221 | 85332 | 289 | 205280 | 669 |
| 51270 | 236 | 59769 | 286 | 69605 | 221 | 85336 | 289 | 205284 | 669 |
| 51277 | 236 | 59777 | 286 | 70277 | 272 | 85360 | 283 | 205285 | 669 |
| 51300 | 236 | 59789 | 286 | 70307 | 272 | 85364 | 283 | 206280 | 671 |
| 51307 | 236 | 60119 | 187 | 70407 | 272 | 85420 | 289 | 206284 | 671 |
| 51400 | 236 | 60121 | 187 | 70437 | 272 | 85460 | 283 | 206285 | 671 |
| 51407 | 236 | 60122 | 187 | 71119 | 190 | 85470 | 283 | 222230 | 667 |
| 51600 | 236 | 61270 | 227 | 71121 | 190 | 85475 | 283 | 222232 | 667 |
| 51607 | 236 | 61275 | 227 | 71122 | 190 | 85626 | 289 | 222238 | 667 |
| 52270 | 229 | 61300 | 227 | 71470 | 255 | 85876 | 288 | 223232 | 665 |
| 52277 | 229 | 61305 | 227 | 71477 | 255 | 85884 | 288 | 223233 | 665 |
| 52300 | 229 | 61400 | 227 | 72277 | 276 | 85890 | 283 | 10XXXX | 113 |
| 52307 | 229 | 61405 | 227 | 72307 | 276 | 85890 | 286 | 12XXXX | 111 |
| 52400 | 229 | 61600 | 227 | 72407 | 276 | 85890 | 288 | 130L006 | 685 |
| 52407 | 229 | 61605 | 227 | 72437 | 276 | 85894 | 283 | 130L006-2 | 686 |
| 52600 | 229 | 62412 | 290 | 73119 | 193 | 85894 | 286 | 130L006-2F | 686 |
| 52607 | 229 | 62415 | 290 | 73121 | 193 | 85894 | 288 | 130L184-5 | 687 |
| 53119 | 173 | 62430 | 290 | 73122 | 193 | 85990 | 283 | 130L184-5F | 687 |
| 53121 | 173 | 62460 | 290 | 74277 | 278 | 85993 | 289 | 130L195-A | 687 |
| 53122 | 173 | 62475 | 290 | 74307 | 278 | 85995 | 283 | 130L195-B | 687 |
| 54460 | 247 | 63360 | 243 | 74407 | 278 | 86019 | 282 | 130L195-C | 686 |
| 54467 | 247 | 63367 | 243 | 74437 | 278 | 87029 | 282 | 130L195-D | 686 |
| 55270 | 233 | 64153 | 291 | 75119 | 182 | 88460 | 282 | 13XXXX | 119 |
| 55300 | 233 | 64158 | 291 | 75121 | 182 | 89260 | 282 | 140026-C3T | 692 |
| 55400 | 233 | 64270 | 216 | 75122 | 182 | 90990 | 282 | 140026-F4T | 692 |
| 56270 | 232 | 64300 | 216 | 76300 | 231 | 91430 | 282 | 140L0261L | 693 |
| 56300 | 232 | 64400 | 216 | 76400 | 231 | 92353 | 287 | 140L026L | 693 |

| | |
|---|---|
| 141123-TC3 | 692 |
| 141123-TC3D | 692 |
| 141123-TF4 | 692 |
| 141123-TF4D | 692 |
| 14XXXX | 117 |
| 15XXXX | 105 |
| 16XXXX | 106 |
| 171160P30-C | 704 |
| 171160P38(N)-C | 704 |
| 17XXXX | 123 |
| 18XXXX | 133 |
| 257226C | 659 |
| 258226C | 657 |
| 2XXX1X | 139 |
| 2XXXX2 | 99 |
| 2XXXXX | 43 |
| 2XXXXX | 70 |
| 32275-N | 237 |
| 32305-N | 237 |
| 32405-N | 237 |
| 32605-N | 237 |
| 3371-V2 | 331 |
| 33XXXX | 109 |
| 3432-N | 680 |
| 3433-N | 680 |
| 3434-N | 680 |
| 3435-N | 680 |
| 3436-N | 680 |
| 3437-N | 680 |
| 3474-M | 688 |
| 3479(N) | 696 |
| 3480(N) | 696 |
| 3481(N) | 696 |
| 3482(N) | 696 |
| 3483(N) | 696 |
| 3484(N) | 696 |
| 3492-N | 680 |
| 3493-N | 680 |
| 3494-N | 680 |
| 3537(N) | 694 |
| 3538(N) | 694 |
| 3539(N) | 695 |
| 3624-V2 | 331 |
| 3654-N | 681 |
| 3655-N | 681 |
| 3656-N | 681 |
| 37XXXX | 93 |
| 3916-N | 515 |
| 3989-V3 | 324 |
| 3990-V3 | 324 |
| 39XX1X | 141 |
| 3X9XXX | 301 |
| 3XXXXX | 50 |
| 3XXXXX | 56 |
| 4015-V2 | 682 |
| 4016-V2 | 682 |
| 4017-V2 | 682 |
| 4018-V2 | 682 |
| 4019-V2 | 682 |
| 4020-V2 | 682 |
| 4021-V2 | 682 |
| 4022-V2 | 682 |
| 4230-N | 465 |
| 4231-N | 465 |
| 4241-N | 335 |
| 4242-N | 335 |
| 4332-N | 466 |
| 4333-N | 466 |
| 4334-N | 470 |
| 4335-N | 470 |
| 4336-N | 317 |
| 4338-N | 317 |
| 4449-V2 | 311 |
| 4450-V2 | 311 |
| 4457-D | 365 |
| 4458-D | 365 |
| 4459-D | 365 |
| 4460-D | 365 |
| 4499-V2 | 520 |
| 44X9XX | 76 |
| 4500-V2 | 519 |
| 46XXXX | 147 |
| 4739-N | 513 |
| 4740-N | 513 |
| 4925-N | 513 |
| 49XXX2 | 143 |
| 4XXXX8 | 79 |
| 4XXXXX | 45 |
| 505119DIM-C | 698 |
| 505143E-C | 698 |
| 55XXXX | 86 |
| 582L015-C3 | 690 |
| 582L015-C3B | 690 |
| 582L015-F4 | 690 |
| 582L015-F4B | 690 |
| 582L016T40E-C3 | 689 |
| 582L016T40E-F | 689 |
| 58XXXX | 103 |
| 592063-G12/3 | 691 |
| 592063-G12/4 | 691 |
| 592063-TC | 691 |
| 592063-TF | 691 |
| 592072-1 | 702 |
| 5920731-(N2) | 702 |
| 592074-C(N) | 703 |
| 592076-C3(N) | 703 |
| 592122-FL2 | 700 |
| 592122-FL2E | 700 |
| 592122-FL3 | 700 |
| 592122-FLE3 | 700 |
| 592122R39-2 | 702 |
| 592122R-C3 | 700 |
| 592125R2-C | 697 |
| 592125R2-C3 | 697 |
| 592125R2-F | 697 |
| 592125R-C | 697 |
| 592125R-C3 | 697 |
| 592125R-F | 697 |
| 592125S-6(N) | 695 |
| 592125S-6C(N) | 695 |
| 592125S-6F(N) | 695 |
| 592125SC-2(N) | 695 |
| 592125SC-3(N) | 695 |
| 592125SC-4(N) | 695 |
| 592141-C3E2 | 707 |
| 592141-E4C3 | 707 |
| 592165SIL-C | 705 |
| 592165SIL-F | 705 |
| 592563(N)-4C(N2) | 694 |
| 592563(N)-4F(N2) | 694 |
| 5925631(N)-4C(N2) | 694 |
| 5925631(N)-4F(N2) | 694 |
| 5925631-4C2(N) | 694 |
| 592563-4C2(N) | 694 |
| 592563R1-C2 | 694 |
| 592563R1-C3 | 694 |
| 592563R1-F4 | 694 |
| 592563R-C2 | 694 |
| 592563R-C3 | 694 |
| 592563R-F4 | 694 |
| 5XXXXX | 47 |
| 5XXXXX | 53 |
| 5XXXXX | 77 |
| 61XX0X | 62 |
| 63XXXX | 61 |
| 68XXX1 | 64 |
| 69XXXX | 60 |
| 6XXXXX | 55 |
| 6XXXXX | 58 |
| 6XXXXX | 68 |
| 71XXXX | 95 |
| 72XXXX | 91 |
| 74XXXX | 137 |
| 75XXXX | 85 |
| 76XXXX | 135 |
| 78XXXX | 89 |
| 79XXXX | 97 |
| 81XX0X | 81 |
| 86XXXX | 115 |
| 88XXXX | 101 |
| 8XXXXX | 49 |
| 8XXXXX | 73 |
| 8XXXXX | 83 |
| 97XX4X | 485 |
| 9XXX1X | 51 |
| 9XXXXX | 74 |
| B9XXXX | 151 |
| BCXX2X | 153 |
| BRXX2X | 155 |
| BTXX2X | 157 |
| D-3626 | 331 |
| D-3627 | 331 |
| D-3628 | 331 |
| DM4430 | 264 |
| DM4437 | 264 |
| DM5470 | 265 |
| DM5477 | 265 |
| SP1300 | 259 |
| SP1400 | 259 |
| SP2430 | 260 |
| SP3470 | 261 |
| SP4437 | 263 |
| TR10024 | 290 |
| TR16024 | 290 |
| TR3024 | 290 |
| TR6024 | 290 |
| Z1XX0X | 126 |
| Z1XX0X | 127 |

# New Headquarter Roca 3









# New Headquarter Roca 3










# Headquarter Roca 2

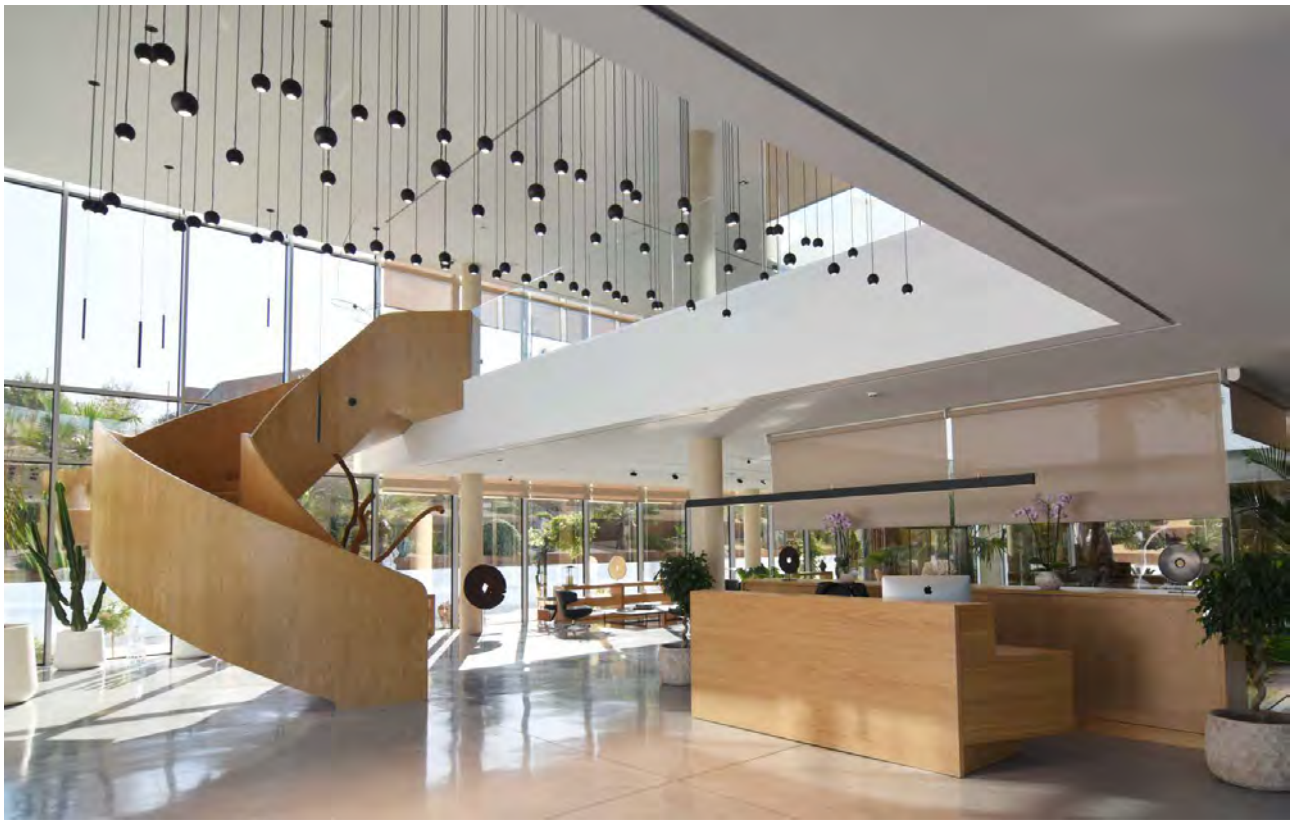

Showroom Beneito Faure, La Roca del Valles (Spain).

# Headquarter Roca 1




**Headquarter Roca 1**
C/ Thomas Edison 4-6
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)

**Headquarter Roca 2**
C/ Nòria 10
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)

**Headquarter Roca 3**
C/ Nòria 15
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)


BENEITO FAURE®

passion
for
led light

BENEITO FAURE®

beneito-faure.com